

# FBR3500 - FBR3510

**PRV : 50 - 1000 Volts**  
**I<sub>o</sub> : 35 Amperes**


## FEATURES :

- \* High case dielectric strength
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Fast switching for high efficiency

## MECHANICAL DATA :

- \* Case : Molded plastic with heatsink integrally mounted in the bridge encapsulation
- \* Epoxy : UL94V-O rate flame retardant
- \* Terminals : plated .25" (6.35 mm). Faston
- \* Polarity : Polarity symbols marked on case
- \* Mounting position : Bolt down on heat-sink with silicone thermal compound between bridge and mounting surface for maximum heat transfer efficiency.
- \* Weight : 17.1 grams

# FAST RECOVERY BRIDGE RECTIFIERS

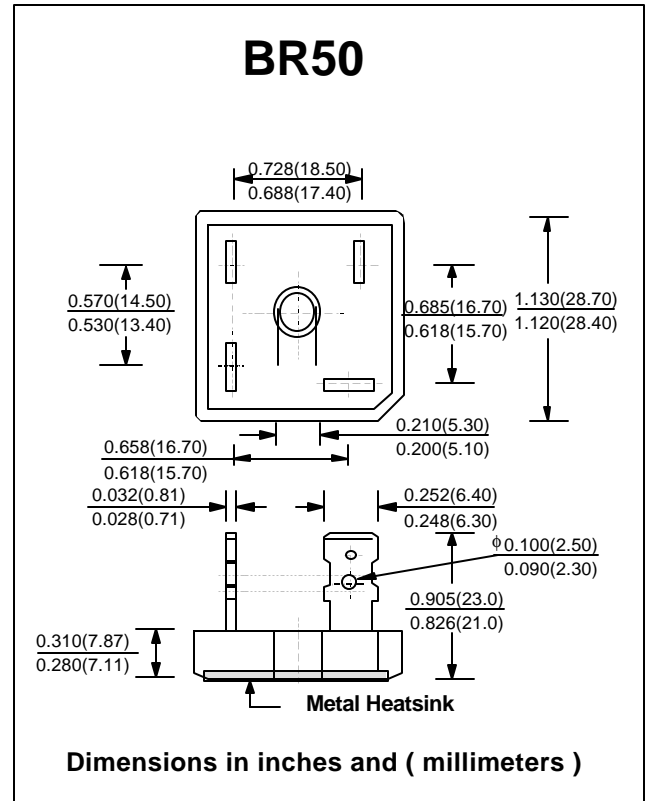

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.


RATING	SYMBOL	FBR 3500	FBR 3501	FBR 3502	FBR 3504	FBR 3506	FBR 3508	FBR 3510	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Current T <sub>c</sub> = 55 °C	I <sub>F(AV)</sub>	35							Amps.
Peak Forward Surge Current Single half sine wave Superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	400							Amps.
Current Squared Time at t < 8.3 ms.	I <sup>2</sup> t	660							A <sup>2</sup> S
Maximum Forward Voltage drop per Diode at I <sub>F</sub> = 17.5 Amps.	V <sub>F</sub>	1.3							Volts
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 100 °C	I <sub>R</sub>	10							µA
	I <sub>R(H)</sub>	200							µA
Maximum Reverse Recovery Time (Note 1)	T <sub>rr</sub>	150			250	500		ns	
Typical Thermal Resistance per diode (Note 2)	R <sub>θJC</sub>	10							°C/W
Operating Junction Temperature Range	T <sub>J</sub>	- 50 to + 150							°C
Storage Temperature Range	T <sub>STG</sub>	- 50 to + 150							°C

### Notes :

- 1) Measured with I<sub>F</sub> = 0.5 Amp., I<sub>R</sub> = 1 Amp., I<sub>rr</sub> = 0.25 Amp.
- 2) Thermal Resistance from junction to case with units mounted on a 7.5" x 3.5" x 4.6" (19cm.x 9cm.x 11.8cm.) Al.-Finned Plate


## RATING AND CHARACTERISTIC CURVES ( FBR3500 - FBR3510 )

**FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM**

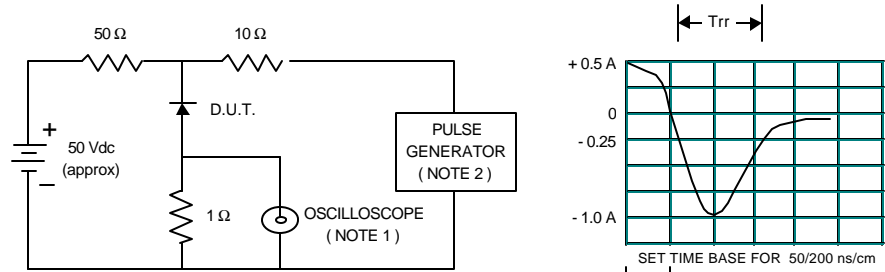


NOTES : 1. Rise Time = 7 ns max., Input Impedance = 1 megaohm, 22 pF.  
 2. Rise time = 10 ns max., Source Impedance = 50 ohms.  
 3. All Resistors = Non-inductive Types.


**FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

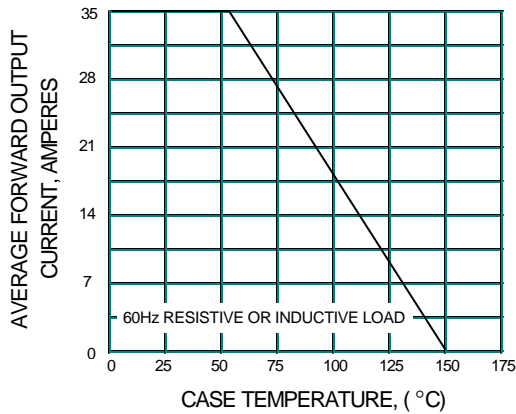

**FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

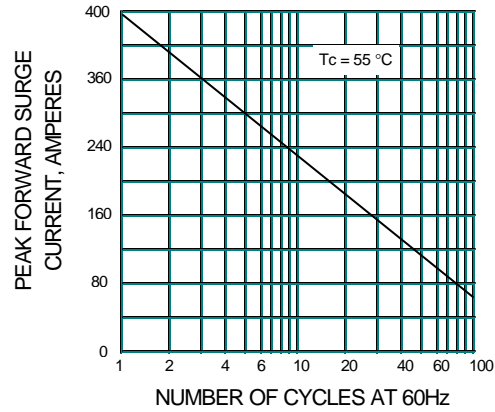

**FIG.4 - TYPICAL FORWARD CHARACTERISTICS PER DIODE**

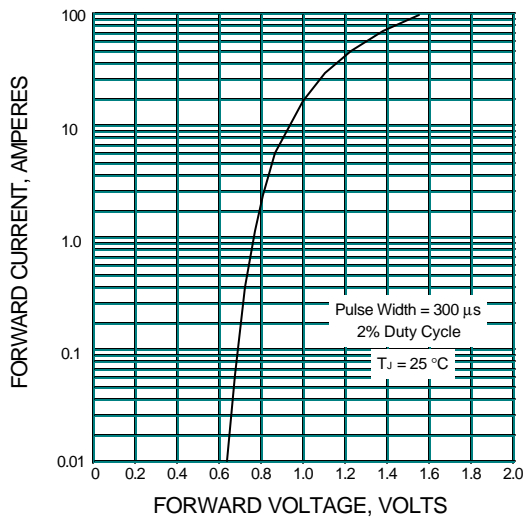

**FIG.5 - TYPICAL REVERSE CHARACTERISTICS PER DIODE**

