

# Philips Components

Document No.	853-0627
ECN No.	99800
Date of Issue	June 14, 1990
Status	Product Specification
ECL Products	

# 100164

## 16-Input Multiplexer

### FEATURES

- Typical propagation delay: 1.60ns
- Typical supply current ( $-I_{EE}$ ): 71mA

### DESCRIPTION


The 100164 is a 16-input multiplexer. Four data select inputs ( $S_n$ ) choose one of the 16 data inputs ( $D_n$ ) to be gated to the output ( $Q$ ).

All unused inputs can be left open due to integrated pull-down resistors.

### PIN DESCRIPTION

PINS	DESCRIPTION
$D_0 - D_{15}$	Data Inputs
$S_0 - S_3$	Data Select Inputs
Q	Data Output


### IEC/IEEE SYMBOL

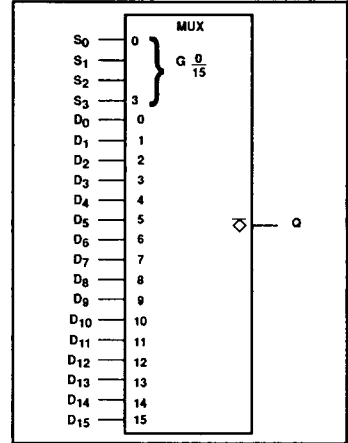

### ORDERING INFORMATION

DESCRIPTION	ORDER CODE
24-Pin Ceramic DIP (400 mils wide)	100164F
24-Pin Ceramic Flat Pack	100164Y
28-Pin PLCC	100164A


### PIN CONFIGURATIONS

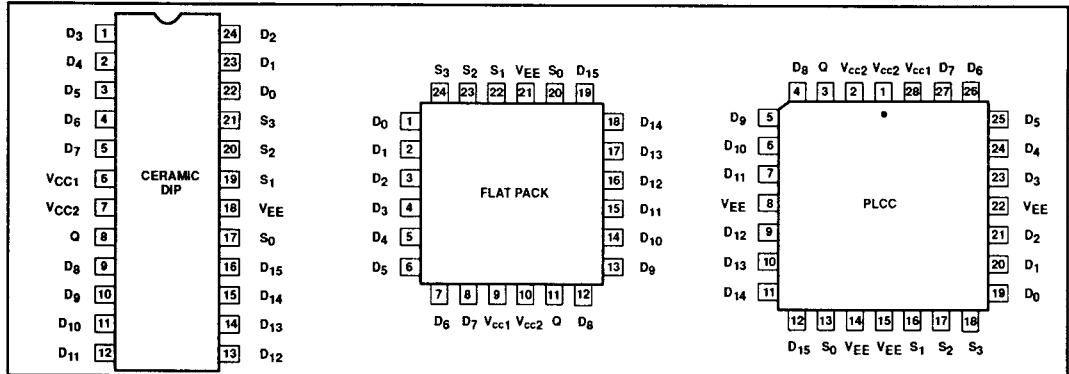

# Multiplexer

100164

## LOGIC DIAGRAM

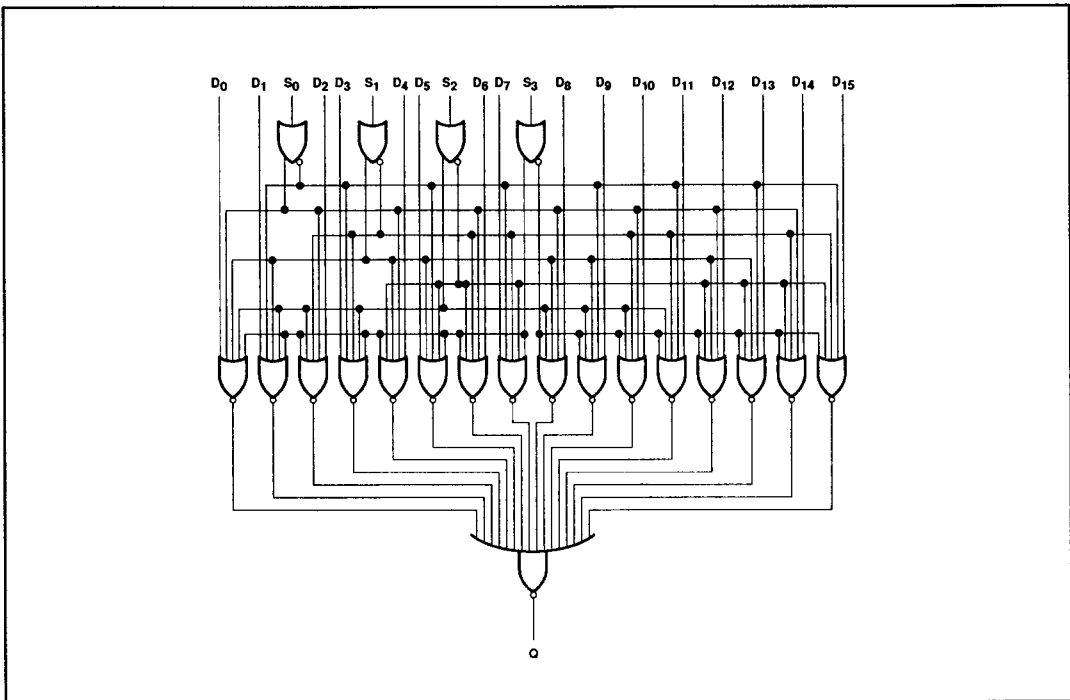

## FUNCTION TABLE

SELECT INPUTS				OUTPUT
S <sub>3</sub>	S <sub>2</sub>	S <sub>1</sub>	S <sub>0</sub>	Q
L	L	L	L	D <sub>0</sub>
L	L	L	H	D <sub>1</sub>
L	L	H	L	D <sub>2</sub>
L	L	H	H	D <sub>3</sub>
L	H	L	L	D <sub>4</sub>
L	H	L	H	D <sub>5</sub>
L	H	H	L	D <sub>6</sub>
L	H	H	H	D <sub>7</sub>
H	L	L	L	D <sub>8</sub>
H	L	L	H	D <sub>9</sub>
H	L	H	L	D <sub>10</sub>
H	L	H	H	D <sub>11</sub>
H	H	L	L	D <sub>12</sub>
H	H	L	H	D <sub>13</sub>
H	H	H	L	D <sub>14</sub>
H	H	H	H	D <sub>15</sub>

**NOTES:**

- H = High voltage level
- L = Low voltage level

## Multiplexer

100164

**ABSOLUTE MAXIMUM RATINGS**  $V_{CC1} = V_{CC2} = \text{ground}$ ,  $T_A = 0^\circ\text{C}$  to  $+85^\circ\text{C}$  unless otherwise specified.

SYMBOL	PARAMETER	LIMITS	UNIT
$V_{EE}$	Supply voltage range	-7.0 to +0.5	V
$V_{IN}$	Input voltage ( $V_{IN}$ should never be more negative than $V_{EE}$ )	$V_{EE}$ to +0.5	V
$I_O$	Output source current (continuous)	-55	mA
$T_S$	Storage temperature range	-65 to +150	$^\circ\text{C}$
$T_J$	Maximum junction temperature	+150	$^\circ\text{C}$

**NOTE:**

Operation beyond the limits set forth in this table may impair the useful life of the device.

**DC OPERATING CONDITIONS**

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS			UNIT
			MIN.	NOM.	MAX.	
$V_{CC1}, V_{CC2}$	Circuit ground		0	0	0	V
$V_{EE}$	Supply voltage		-4.8	-4.5	-4.2	V
$V_{EE}$	Supply voltage when operating with the 10K or the 10KH ECL family		-5.7			V
$V_{IH}$	High level input voltage	$V_{EE} = -4.2\text{V}$	-1150			mV
		$V_{EE} = -4.5\text{V}$	-1165		-880	
		$V_{EE} = -4.8\text{V}$	-1165			
$V_{IL}$	Low level input voltage	$V_{EE} = -4.2\text{V}$			-1475	mV
		$V_{EE} = -4.5\text{V}$	-1810		-1475	mV
		$V_{EE} = -4.8\text{V}$			-1490	mV
$T_A$	Operating ambient temperature range		0	+25	+85	$^\circ\text{C}$

**NOTE:**When operating at other than the specified  $V_{EE}$  voltages (-4.2V, -4.5V, -4.8V), the DC and AC electrical characteristics will vary slightly from their specified values.

## Multiplexer

100164

**DC ELECTRICAL CHARACTERISTICS**  $V_{CC1} = V_{CC2} = \text{ground}$ ,  $V_{EE} = -4.8\text{V}$  to  $-4.2\text{V}$ ,  $T_A = 0^\circ\text{C}$  to  $+85^\circ\text{C}$  unless otherwise specified<sup>1,3,4</sup>

SYMBOL	PARAMETER		TEST CONDITIONS <sup>2</sup>	LIMITS			UNIT		
				MIN.	TYP.	MAX.			
$V_{OH}$	High level output voltage		Inputs at $V_{IHMAX}$ or $V_{ILMIN}$	$V_{EE} = -4.2\text{V}$	-1020		-870	mV	
				$V_{EE} = -4.5\text{V}$	-1025	-955	-880	mV	
				$V_{EE} = -4.8\text{V}$	-1035		-880	mV	
$V_{OHT}$	High level output threshold voltage		Outputs loaded with $50\Omega$ to $-2.0\text{V}$ $\pm 0.010\text{V}$	Apply $V_{IHMIN}$ or $V_{ILMAX}$ to one input at a time. Other inputs at $V_{IHMAX}$ or $V_{ILMIN}$ .	$V_{EE} = -4.2\text{V}$	-1030			mV
					$V_{EE} = -4.5\text{V}$	-1035			mV
					$V_{EE} = -4.8\text{V}$	-1045			mV
$V_{OLT}$	Low level output threshold voltage		with $50\Omega$ to $-2.0\text{V}$ $\pm 0.010\text{V}$	Apply $V_{IHMIN}$ or $V_{ILMAX}$ to one input at a time. Other inputs at $V_{IHMAX}$ or $V_{ILMIN}$ .	$V_{EE} = -4.2\text{V}$			-1595	mV
					$V_{EE} = -4.5\text{V}$			-1610	mV
					$V_{EE} = -4.8\text{V}$			-1610	mV
$V_{OL}$	Low level output voltage		Inputs at $V_{IHMAX}$ or $V_{ILMIN}$ .	$V_{EE} = -4.2\text{V}$	-1810		-1605	mV	
				$V_{EE} = -4.5\text{V}$	-1810	-1705	-1620	mV	
				$V_{EE} = -4.8\text{V}$	-1830		-1620	mV	
$I_{IH}$	High level input current	$D_n$	One input under test at $V_{IHMAX}$ . Other inputs at $V_{ILMIN}$ .				240	$\mu\text{A}$	
		$S_0, S_1$					240	$\mu\text{A}$	
		$S_2, S_3$					240	$\mu\text{A}$	
$I_{IL}$	Low level input current		One input under test at $V_{ILMIN}$ . Other inputs at $V_{IHMAX}$ .		0.5			$\mu\text{A}$	
$-I_{EE}$	$V_{EE}$ supply current		All inputs at $V_{IHMAX}$		49	71	105	$\text{mA}$	

**NOTES:**

- The specified limits represent the worst case values for the parameter. Since these worst case values normally occur at the supply voltage and temperature extremes, additional noise immunity can be achieved by decreasing the allowable operating condition ranges.
- Conditions for testing shown in the tables are not necessarily worst case. For worst case testing guidelines, refer to DC Testing, Chapter 1, Section 3.
- The specified limits shown in the DC electrical characteristics table can be met only after thermal equilibrium has been established. Thermal equilibrium is established by applying power for at least 2 minutes, while maintaining transverse airflow of 2.5 meters/sec (500 linear feet/min) over the device, mounted either in a test socket or on a printed circuit board. Test voltage values are given in the DC operating conditions table.
- The device can function down to  $V_{EE} = -5.7\text{V}$ , allowing operation with either the 10K or the 10KH family. Correction factors can be used to calculate new DC limits for the extended  $V_{EE}$  range. For more information, see Chapters 5 and 10, Section 4.

## Multiplexer

100164

## AC ELECTRICAL CHARACTERISTICS

Ceramic DIP  $V_{CC1} = V_{CC2} = \text{ground}$ ,  $V_{EE} = -4.8\text{V to } -4.2\text{V}$ 

SYMBOL	PARAMETER	TEST CONDITION	LIMITS						UNIT
			$T_A = 0^\circ\text{C}$		$T_A = +25^\circ\text{C}$		$T_A = +85^\circ\text{C}$		
			MIN.	Max.	MIN.	MAX.	MIN.	MAX.	
$t_{PLH}$ $t_{PHL}$	Propagation delay $D_n$ to Q	Waveform 1	0.80 0.80	2.20 2.20	0.90 0.90	2.35 2.35	0.90 0.90	2.55 2.55	ns ns
$t_{PLH}$ $t_{PHL}$	Propagation delay $S_0, S_1$ to Q		1.45 1.45	3.20 3.20	1.45 1.45	3.20 3.20	1.45 1.45	3.60 3.60	ns ns
$t_{PLH}$ $t_{PHL}$	Propagation delay $S_2, S_3$ to Q		1.10 1.10	2.50 2.50	1.10 1.10	2.50 2.50	1.10 1.10	2.80 2.80	ns ns
$t_{TLH}$ $t_{THL}$	Transition time Q		0.45 0.45	1.60 1.60	0.45 0.45	1.60 1.60	0.45 0.45	1.60 1.60	ns ns

## NOTE:

For AC test setup information, see AC Testing, Chapter 2, Section 3.

## AC ELECTRICAL CHARACTERISTICS

Ceramic DIP  $V_{CC1} = V_{CC2} = \text{ground}$ ,  $V_{EE} = -5.2\text{V} \pm 5\%$ 

SYMBOL	PARAMETER	TEST CONDITION	LIMITS						UNIT
			$T_A = 0^\circ\text{C}$		$T_A = +25^\circ\text{C}$		$T_A = +85^\circ\text{C}$		
			MIN.	Max.	MIN.	MAX.	MIN.	MAX.	
$t_{PLH}$ $t_{PHL}$	Propagation delay $D_n$ to Q	Waveform 1	0.80 0.80	2.20 2.20	0.90 0.90	2.35 2.35	0.90 0.90	2.55 2.55	ns ns
$t_{PLH}$ $t_{PHL}$	Propagation delay $S_0, S_1$ to Q		1.45 1.45	3.20 3.20	1.45 1.45	3.20 3.20	1.45 1.45	3.60 3.60	ns ns
$t_{PLH}$ $t_{PHL}$	Propagation delay $S_2, S_3$ to Q		1.10 1.10	2.50 2.50	1.10 1.10	2.50 2.50	1.10 1.10	2.80 2.80	ns ns
$t_{TLH}$ $t_{THL}$	Transition time Q		0.45 0.45	1.60 1.60	0.45 0.45	1.60 1.60	0.45 0.45	1.60 1.60	ns ns

## NOTE:

For AC test setup information, see AC Testing, Chapter 2, Section 3.

## AC ELECTRICAL CHARACTERISTICS

Flat Pack and PLCC  $V_{CC1} = V_{CC2} = \text{ground}$ ,  $V_{EE} = -4.8\text{V to } -4.2\text{V}$ 

SYMBOL	PARAMETER	REFERENCE	LIMITS						UNIT
			$T_A = 0^\circ\text{C}$		$T_A = +25^\circ\text{C}$		$T_A = +85^\circ\text{C}$		
			MIN.	Max.	MIN.	MAX.	MIN.	MAX.	
$t_{PLH}$ $t_{PHL}$	Propagation delay $D_n$ to Q	Waveform 1	0.80 0.80	2.00 2.00	0.90 0.90	2.15 2.15	0.90 0.90	2.35 2.35	ns ns
$t_{PLH}$ $t_{PHL}$	Propagation delay $S_0, S_1$ to Q		1.45 1.45	3.00 3.00	1.45 1.45	3.00 3.00	1.45 1.45	3.40 3.40	ns ns
$t_{PLH}$ $t_{PHL}$	Propagation delay $S_2, S_3$ to Q		1.10 1.10	2.30 2.30	1.10 1.10	2.30 2.30	1.10 1.10	2.60 2.60	ns ns
$t_{TLH}$ $t_{THL}$	Transition time Q		0.45 0.45	1.60 1.60	0.45 0.45	1.60 1.60	0.45 0.45	1.60 1.60	ns ns

## NOTE:

For AC test setup information, see AC Testing, Chapter 2, Section 3.

# Multiplexer

100164

## AC ELECTRICAL CHARACTERISTICS


Flat Pack and PLCC  $V_{CC1} = V_{CC2} = \text{ground}$ ,  $V_{EE} = -5.2V \pm 5\%$

SYMBOL	PARAMETER	TEST CONDITION	LIMITS						UNIT
			$T_A = 0^\circ\text{C}$		$T_A = +25^\circ\text{C}$		$T_A = +85^\circ\text{C}$		
			MIN.	Max.	MIN.	MAX.	MIN.	MAX.	
$t_{PLH}$ $t_{PHL}$	Propagation delay $D_n$ to Q	Waveform 1	0.80 0.80	2.00 2.00	0.90 0.90	2.15 2.15	0.90 0.90	2.35 2.35	ns ns
$t_{PLH}$ $t_{PHL}$	Propagation delay $S_0, S_1$ to Q		1.45 1.45	3.00 3.00	1.45 1.45	3.00 3.00	1.45 1.45	3.40 3.40	ns ns
$t_{PLH}$ $t_{PHL}$	Propagation delay $S_2, S_3$ to Q		1.10 1.10	2.30 2.30	1.10 1.10	2.30 2.30	1.10 1.10	2.60 2.60	ns ns
$t_{TLH}$ $t_{THL}$	Transition time Q		0.45 0.45	1.60 1.60	0.45 0.45	1.60 1.60	0.45 0.45	1.60 1.60	ns ns

**NOTE:**

For AC test setup information, see AC Testing, Chapter 2, Section 3.

## AC WAVEFORMS

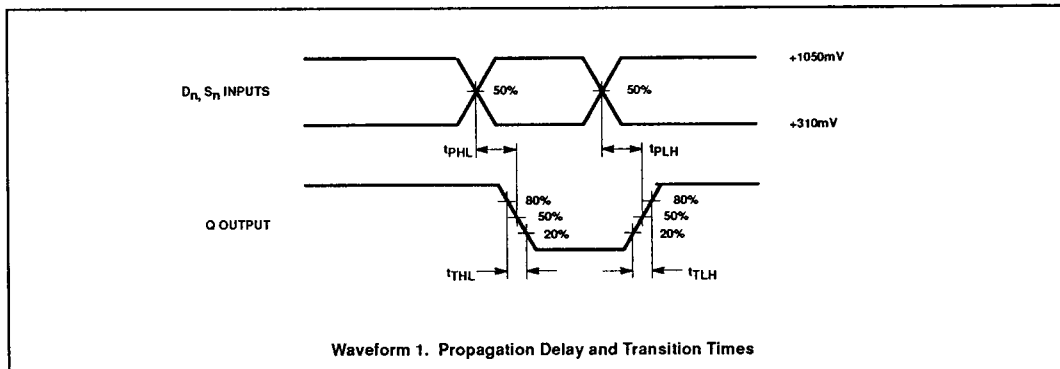

**NOTE:**

All power and signal voltages shifted up 2.0V for AC bench test purposes.

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.