


### 5V Voltage Controlled Crystal Oscillators

- ♦ APPLICATIONS SONET, Digital Cross Connect Equipment; Clock Recovery; Fiber Optic I Transmission Equipment; Phased Locked Loops (PLL's)
- ♦ 155.520MHz
- ♦ 0.5V to 4.5V Control Voltage
- ♦ ±20ppm Stability
- ♦ Complementary PECL 10KH Output
- ♦ -40°C to 85°C Operating Temperature

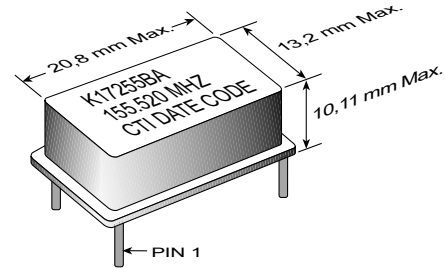

### ELECTRICAL SPECIFICATIONS

Model	K17255BA	K17255BD
Frequency Range (MHz)	155.520MHz	
Input Current (mA)	< 60	
Frequency Control Function	(For Custom Deviation Range, Vc Range, etc. - Consult Factory)	
Deviation (ppm)		
Minimum	±100	±80
Maximum	±150	±140
Linearity (%)	< 10	
Modulation Bandwidth (±3dB)	> 20KHz	
Nominal Control Voltage (V)	2.5	
Control Voltage Range (V)	0.5 to 4.5	
Transfer Function	Positive	
Input Impedance	> 50KΩ @ 10KHz	
Frequency Stability (ppm)		
Overall	Inclusive of Calibration, Temperature, Voltage, Load and Aging	
0°C to +70°C	±20	
-40°C to +85°C	±50	
Temperature Range (°C)		
Operating	-40°C to +85°C	
Storage	-40°C to +125°C	
Supply Voltage (V).	+5.0V ±5%	
Start Up Time (ms)	<10	
Typical SSB Phase Noise (dBC/Hz)	10Hz	-40
Offset from Carrier	100Hz	-70
	1KHz	-100
	10KHz	-130
	100KHz	-140

### PART NUMBERING GUIDE


**K17255BX X** - Specify Frequency

    "Blank" = 0°C to 70°C Operating Temp.

    "M" = -40°C to +85°C Operating Temp.


    Model Selection: See Table Above

## 5V Voltage Controlled Crystal Oscillators

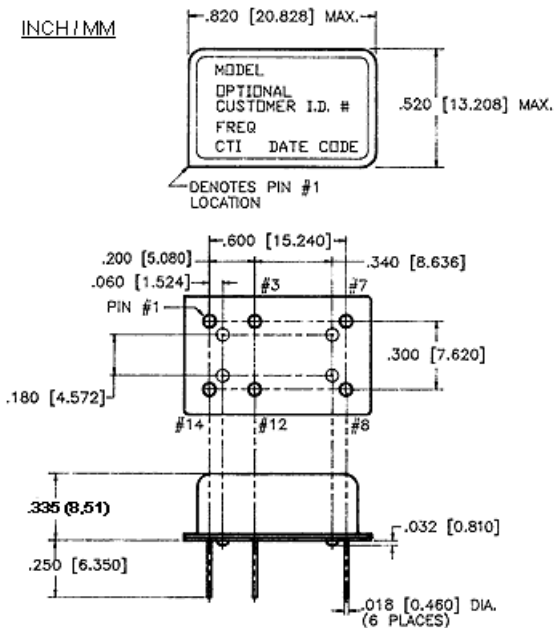


PIN	FUNCTION
1	Voltage Control
3	Gnd/ & Case Gnd
7	V <sub>SS</sub> /Ground
8	Output
12	Output
14	+V <sub>CC</sub>

### SHIPPING TUBE CROSS SECTION

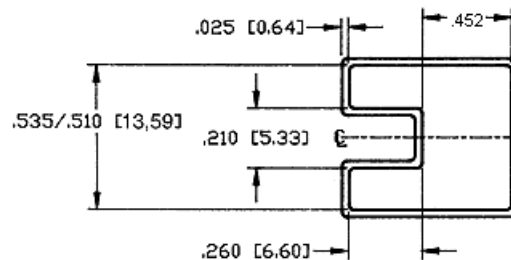


ALL DIMENSIONS ARE INSIDE

### OUTPUT WAVEFORM

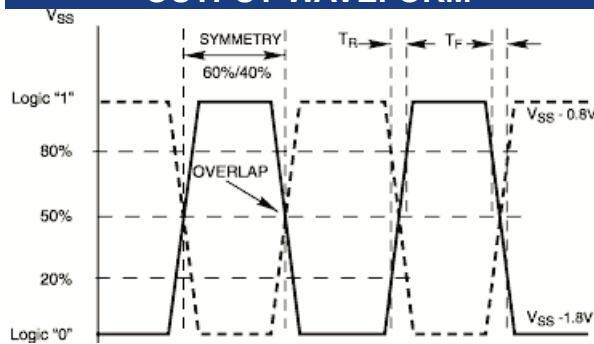

### TEST CIRCUIT DIAGRAM

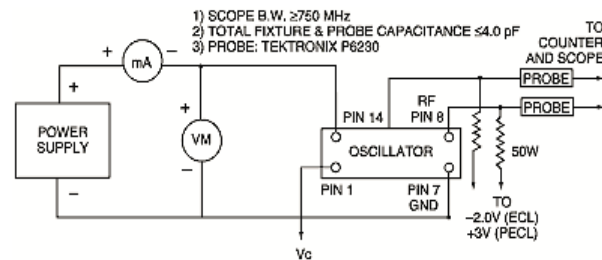

### MECHANICAL AND ENVIRONMENTAL SPECIFICATIONS

TEST METHODS	REFERENCE PROCEDURES	DESCRIPTION
Temperature Cycle	MIL-STD-833, Mtd 1010, Cond. B	-55°C to +125°C; Air-to-Air; 100 cycles; 10 min. dwell
Mechanical Shock	MIL-STD-883, Mtd 2002, Cond. B	1500 g's
Vibration	MIL-STD 883, Mtd 2007, Cond. B	20-2000 Hz; 0.06 inch; 15g's; 3 planes
Humidity Steady State	MIL-STD-202, Mtd 103	40°C; 90%-95% R.H.; 56 days
Thermal Shock	MIL-STD-883, Mtd 1011.7 Cond. B	100°C to 0°C; Water-to-Water; 15 cycles
Electrostatic Discharge	MIL-STD-883, Mtd 3015 Class II	2 KV to 4 KV Threshold
Solderability	MIL-STD-883, Mtd 2022.2	Solder dip; Meniscograph Criteria
Hermeticity	MIL-STD-883, Mtd 1014.8, Cond. A1	Mass spectro. 2 x 10 <sup>-8</sup> atmos. CC/sec He
Resistance to Soldering	MIL-STD-202, Mtd 210D, Cond. C	260°C; 10 seconds: 1 inch/sec.
Lead Integrity	MIL-STD-883, Mtd 2004.5, Cond. A, B1	Lead tension & bend stress
Marking Permanence	MIL-STD-883, Mtd 2015.8	Resistance to solvents
Life Test	MIL-STD-883, Mtd 1005.6	125°C, powered, 1000 hours minimum