

**Silicon Double Balanced HMIC
Mixer 1700 - 2500 MHz**

**MA4EX240L1-1225T
V1**

Features

- Low Cost Miniature Plastic Package
- 6.4 dB Typical Conversion Loss at 2100 MHz
- 7.4 dB Typical Conversion Loss at 2400 MHz
- +3 to +7 dBm LO Drive
- HMIC™ Patented Process
- Silicon Low Barrier Schottky Diodes
- DC - 400 MHz IF Bandwidth
- **Lead Free (RoHS Compliant) With 260 °C. Reflow Capability**
- 100% MATTE Tin Plating

Description and Applications

M/A-COM's MA4EX240L1-1225T is a silicon monolithic 1700-2500 MHz double balanced mixer in a low cost miniature surface mount SOT-25 package. The die uses M/A-COM's unique HMIC™ silicon/glass process to achieve low loss passive elements while retaining the advantages of low barrier silicon Schottky diodes.


These mixers are well suited for high volume wireless and cellular applications where small size and repeatability are required. Typical applications include frequency conversion, modulation, and demodulation for receivers and transmitters in both portable cellular and base station applications.

Absolute Maximum Ratings¹

Parameter	Maximum Ratings
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-65 °C to +150 °C
Incident LO Power	+20 dBm
Incident RF Power	+20 dBm
Solder Temperature	+260 Deg C.

1. Exceeding these limits may cause permanent damage.

**Package Outline
(Topview)**

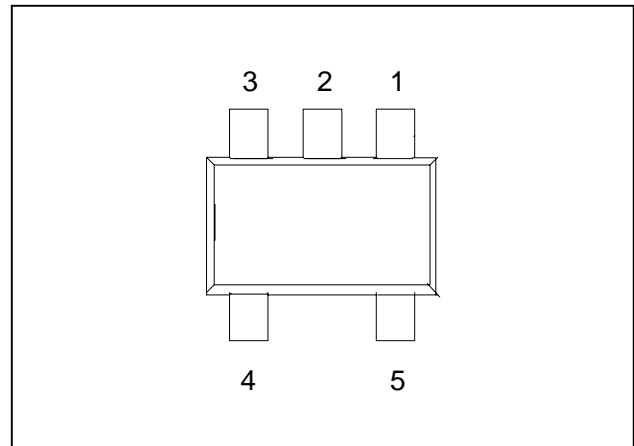


PIN Configuration

PIN	Function	PIN	Function
1	GND	4	RF
2	GND	5	LO
3	IF		

Ordering Information

Standard Part Number	Package
MA4EX240L1-1225T	Tape and Reel

Schematic

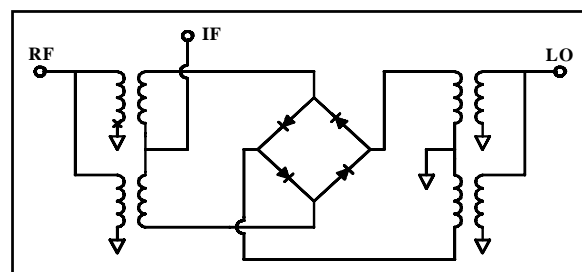

**Silicon Double Balanced HMIC
Mixer 1700 - 2500 MHz**


**MA4EX240L1-1225T
V1**

Electrical Specifications @ +25 °C


Parameter	Frequency	Test Conditions	Units	Min.	Typ.	Max.
Conversion Loss	2100 MHz 1700-2500 MHz	LO Drive = +5 dBm RF = -10 dBm, IF = 60 MHz	dB dB		6.4 7.0	8.2 9.5
L - R Isolation	2100 MHz 1700-2500 MHz	LO Drive = +5 dBm RF Level = -10 dBm	dB dB	14 -	17.5 14.0	
L - I Isolation	2100 MHz 1700-2500 MHz	LO Drive = +5 dBm RF Level = -10 dBm	dB dB	- -	23.0 23.0	
R - I Isolation	2100 MHz 1700-2500 MHz	LO Drive = +5 dBm RF Level = -10 dBm	dB dB	- -	13.5 13.0	
LO VSWR	2100 MHz 1700-2500 MHz	LO Drive = +5 dBm RF Level = -10 dBm			2.1 2.1	- -
RF VSWR	2100 MHz 1700-2500 MHz	LO Drive = +5 dBm RF Level = -10 dBm			1.3 2.0	- -
IF VSWR	DC - 500 MHz	LO Drive = +5 dBm RF Level = -10 dBm			1.3	-
Input IP3	2100 MHz 1700-2500 MHz	LO Drive = +5 dBm IF = 60 MHz	dBm dBm	+10 +8	+13.0 +12.0	
Input 1 dB Compression	2100 MHz 1700-2500 MHz	LO Drive = +5 dBm IF = 60 MHz	dBm dBm		+1.0 +1.0	- -
IF 1 dB Bandwidth			MHz	-	400	-

Typical Performance Curves (LO Drive = +5 dBm, RF = -10 dBm, IF = 60 MHz)


Conversion Loss

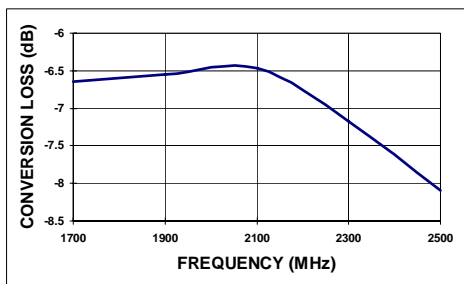


Input IP3 & 1dB Compression Point

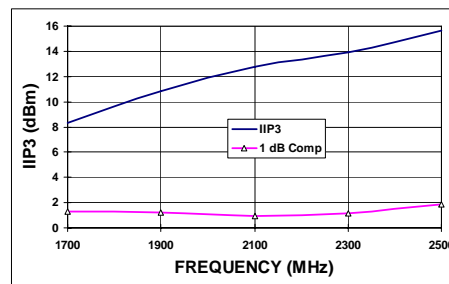

Isolation

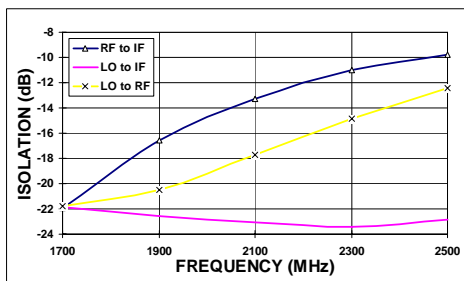


VSWR

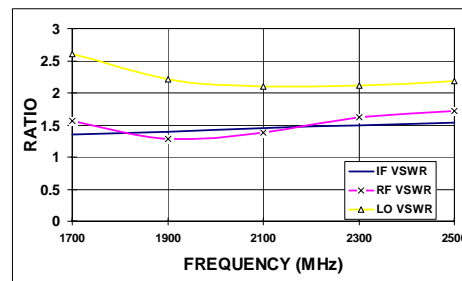

**Silicon Double Balanced HMIC
Mixer 1700 - 2500 MHz**

**MA4EX240L1-1225T
V1**

Case Style - SOT-25

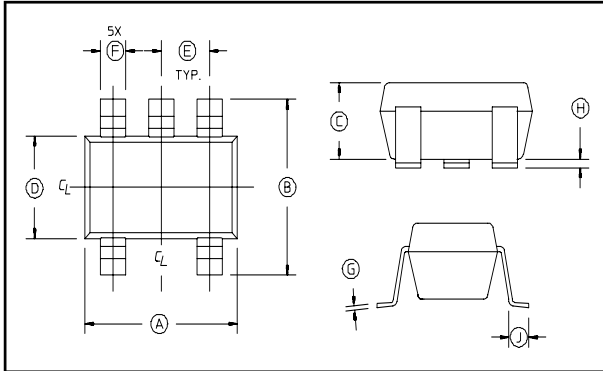

SOT-25 Dimensions

Dim	Inches		Millimeters	
	Min.	Max.	Min.	Max.
A	.106	.122	2.70	3.10
B	.100	.118	2.54	3.00
C	—	.051	—	1.30
D	.063 REF.		1.60 REF.	
E	.032	.043	.80	1.10
F	.014	.020	.35	.50
G	.003	—	.08	—
H	.000	.006	.00	.15
J	.018 REF.		.45 REF.	

Notes: 1. Leads Coplanarity should be 0.003 (0.08) max.