






**Silicon Schottky Diode**

- For mixer applications in VHF/UHF range
- For high-speed switching application


**BAT17**

**BAT17-04  
BAT17-04W**

**BAT17-05  
BAT17-05W**

**BAT17-06  
BAT17-06W**

**BAT17-07**


**ESD: Electrostatic discharge sensitive device, observe handling precaution!**

| Type      | Package | Configuration  | $L_S$ (nH) | Marking |
|-----------|---------|----------------|------------|---------|
| BAT17     | SOT23   | single         | 1.8        | 53s     |
| BAT17-04  | SOT23   | series         | 1.8        | 54s     |
| BAT17-04W | SOT323  | series         | 1.4        | 54s     |
| BAT17-05  | SOT23   | common cathode | 1.8        | 55s     |
| BAT17-05W | SOT323  | common cathode | 1.4        | 55s     |
| BAT17-06  | SOT23   | common anode   | 1.8        | 56s     |
| BAT17-06W | SOT323  | common anode   | 1.4        | 56s     |
| BAT17-07  | SOT143  | parallel pair  | 2          | 57s     |

**Maximum Ratings at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

| Parameter   | Symbol           | Value       | Unit |
|---|------------------|-------------|------|
| Diode reverse voltage                             | $V_R$            | 4           | V    |
| Forward current                                   | $I_F$            | 130         | mA   |
| Total power dissipation                           | $P_{\text{tot}}$ |             | mW   |
| BAT17, $T_S \leq 77^\circ\text{C}$                |                  | 150         |      |
| BAT17-04, BAT17-06, $T_S \leq 61^\circ\text{C}$   |                  | 150         |      |
| BAT17-05, $T_S \leq 46^\circ\text{C}$             |                  | 150         |      |
| BAT17-04W, -05W, -6W, $T_S \leq 92^\circ\text{C}$ |                  | 150         |      |
| BAT17-07, $T_S \leq 60^\circ\text{C}$             |                  | 150         |      |
| Junction temperature                              | $T_j$            | 150         | °C   |
| Operating temperature range                       | $T_{\text{op}}$  | -55 ... 125 |      |
| Storage temperature                               | $T_{\text{stg}}$ | -55 ... 150 |      |

**Thermal Resistance**

| Parameter                                | Symbol            | Value      | Unit |
|--|-------------------|------------|------|
| Junction - soldering point <sup>1)</sup> | $R_{\text{thJS}}$ |            | K/W  |
| BAT17                                    |                   | $\leq 490$ |      |
| BAT17-04, BAT17-06, BAT17-07             |                   | $\leq 590$ |      |
| BAT17-05                                 |                   | $\leq 690$ |      |
| BAT17-04W, BAT17-05W, BAT17-06W          |                   | $\leq 390$ |      |

<sup>1</sup>For calculation of  $R_{\text{thJA}}$  please refer to Application Note Thermal Resistance


**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

| Parameter  | Symbol       | Values            |                   |                    | Unit          |
|--|--------------|-------------------|-------------------|--------------------|---------------|
|  |              | min.              | typ.              | max.               |               |
| <b>DC Characteristics</b>  |              |                   |                   |                    |               |
| Breakdown voltage<br>$I_{(BR)} = 10 \mu\text{A}$   | $V_{(BR)}$   | 4                 | -                 | -                  | V             |
| Reverse current<br>$V_R = 3 \text{ V}$<br>$V_R = 4 \text{ V}$<br>$V_R = 3 \text{ V}, T_A = 60^\circ\text{C}$ | $I_R$        | -                 | -                 | 0.25<br>10<br>1.25 | $\mu\text{A}$ |
| Forward voltage<br>$I_F = 0.1 \text{ mA}$<br>$I_F = 1 \text{ mA}$<br>$I_F = 10 \text{ mA}$                   | $V_F$        | 200<br>250<br>350 | 275<br>340<br>425 | 350<br>450<br>600  | mV            |
| Forward voltage matching <sup>1)</sup><br>$I_F = 1 \text{ mA}$   | $\Delta V_F$ | -                 | -                 | 20                 |               |
| <b>AC Characteristics</b>  |              |                   |                   |                    |               |
| Diode capacitance<br>$V_R = 0, f = 1 \text{ MHz}$  | $C_T$        | 0.4               | 0.55              | 0.75               | pF            |
| Differential forward resistance<br>$I_F = 5 \text{ mA}, f = 10 \text{ kHz}$                                  | $R_F$        | -                 | 8                 | 15                 | $\Omega$      |

<sup>1)</sup> $\Delta V_F$  is the difference between lowest and highest  $V_F$  in multiple diode component.


**Diode capacitance  $C_T = f(V_R)$**

$f = 1\text{MHz}$

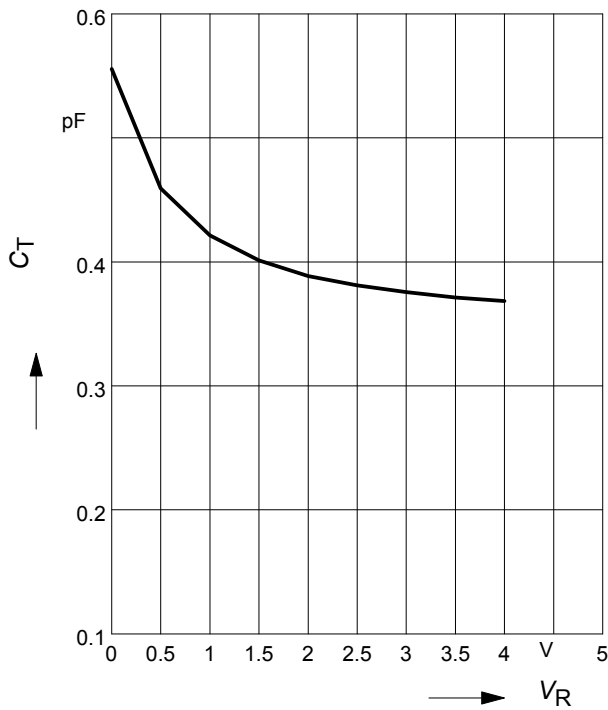


**Forward resistance  $r_f = f(I_F)$**

$f = 10\text{kHz}$

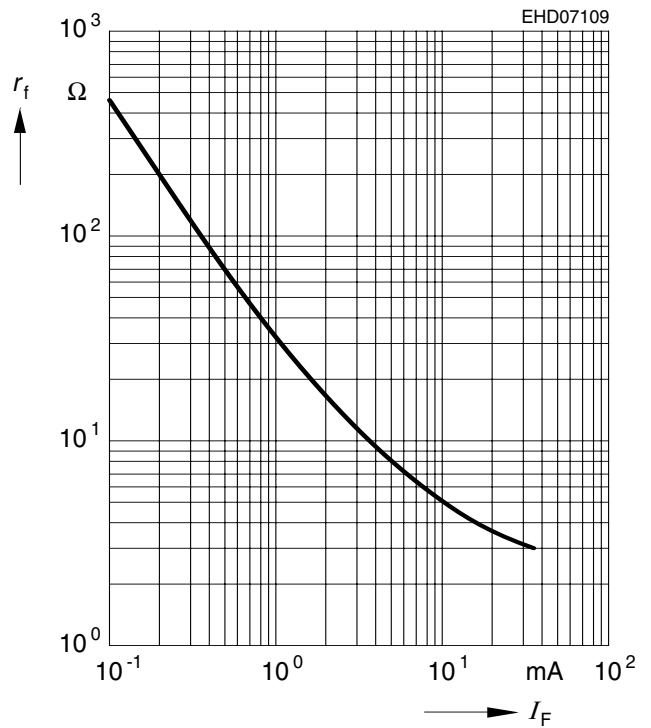


**Reverse current  $I_R = f(V_R)$**

$T_A = \text{Parameter}$

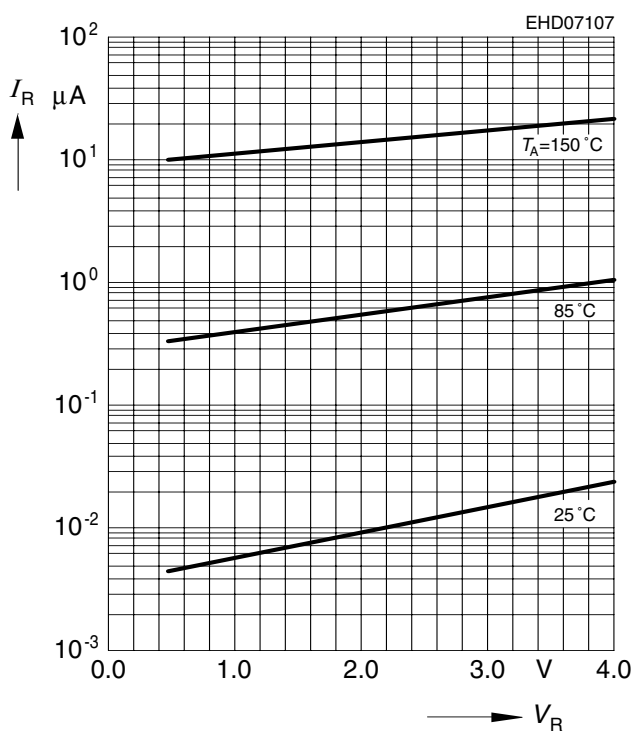


**Forward current  $I_F = f(V_F)$**

$T_A = \text{Parameter}$

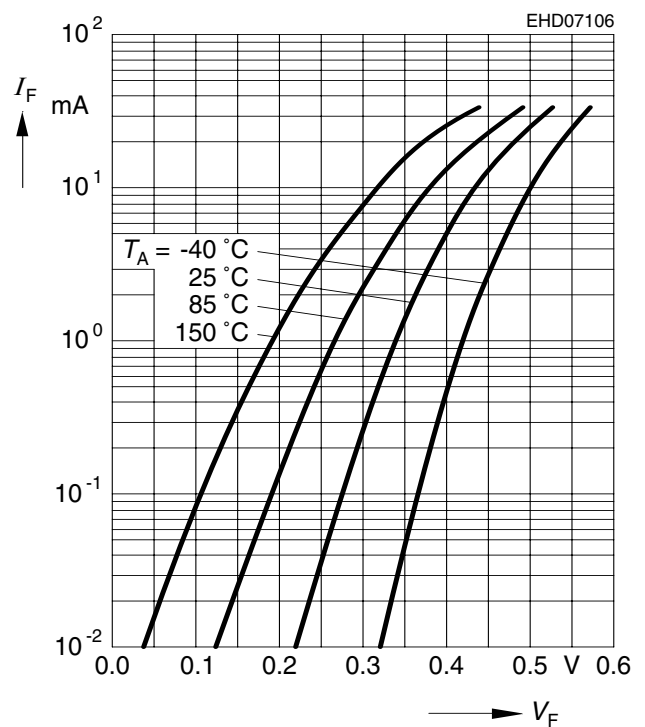


**Forward current  $I_F = f(T_S)$**

BAT17

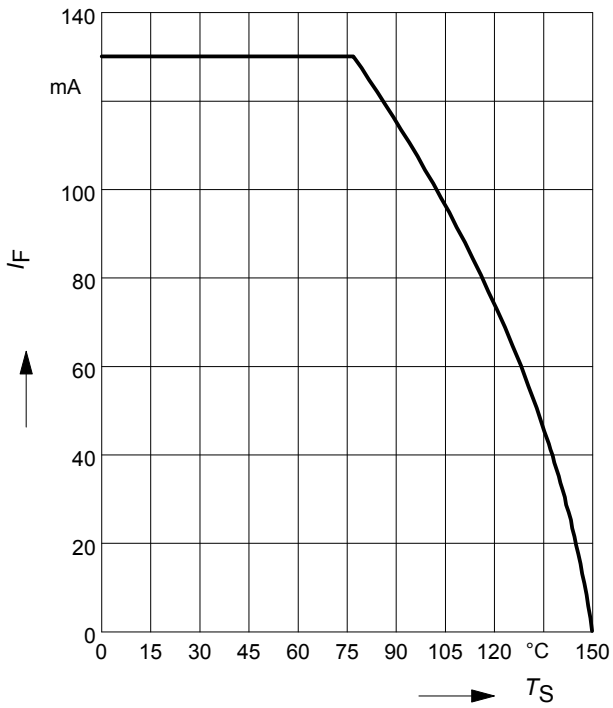

**Forward current  $I_F = f(T_S)$**

BAT17-04, BAT17-06, BAT17-07

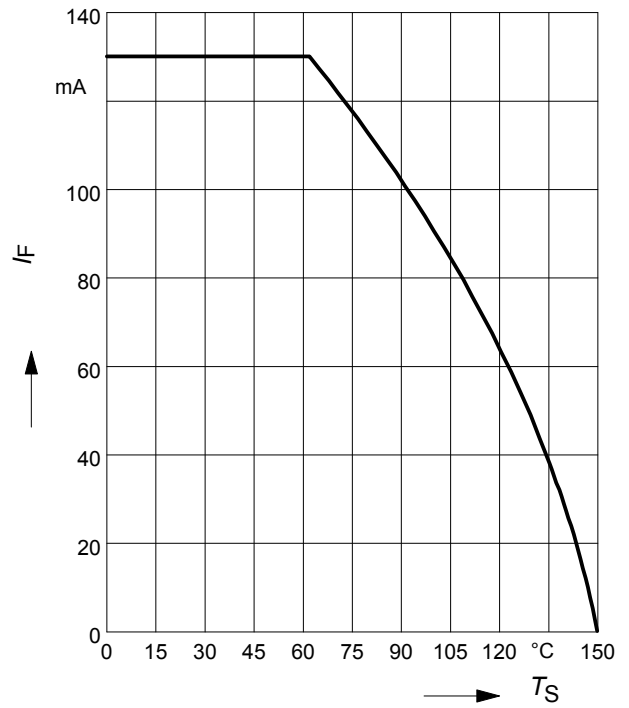

**Forward current  $I_F = f(T_S)$**

BAT17-05

