

Data Sheet B7832





B7832

Low-Loss Filter for Mobile Communication

1855,00 MHz

Data Sheet




Features


- Low-loss RF filter for mobile telephone Korean PCS systems, receive path
- Usable passband 30 MHz
- \blacksquare No matching network required for operation at 50 Ω
- Ceramic package for Surface Mounted technology (SMT)
- RoHS compliant

Terminals

■ Ni, gold-plated

Chip Sized SAW Package QCS5C






Dimensions in mm, approx. weight 0,007 g

Pin configuration

1 Input4 Output

2,3,5 To be grounded



Туре	Ordering code	Marking and Package	Packing		
		according to	according to		
B7832	B39192-B7832-C710	C61157-A7-A111	F61074-V8151-Z000		

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30/+ 85	°C	
Storage temperature range	$T_{\rm stg}$	- 40/+ 85	°C	
DC voltage	$V_{\rm DC}$	0	V	
Input power max.	P_{IN}	0	dBm	CDMA signal



B7832

Low-Loss Filter for Mobile Communication

1855,00 MHz

Data Sheet



Characteristics

Operating temperature range:

 $T = -30 \text{ to} + 85^{\circ} \text{C}$ $Z_{\text{S}} = 50 \Omega$ $Z_{\text{L}} = 50 \Omega$ Terminating source impedance: Terminating load impedance:

		min.	typ.	max.	
Center frequency	f _C	_	1855,0	_	MHz
Maximum insertion attenuation 1840,01870,0 MHz	α _{max}	_	1,8	2,4	dB
Amplitude ripple (p-p) 1840,01870,0 MH:	Δα	_	0,6	1,2	dB
VSWR 1840,01870,0 MH:	Z	_	1,5	1,9	
Attenuation 1440,01470,0 MH: 1750,01780,0 MH: 1930,01960,0 MH:	<u>z</u>	35,0 40,0 40,0	39,0 45,0 51,0	_ _ _	dB dB dB
2240,02270,0 MH	<u>z</u>	40,0	46,0	_	dB




SAW Components B7832

Low-Loss Filter for Mobile Communication 1855,00 MHz


Data Sheet



Transfer function (measurement)

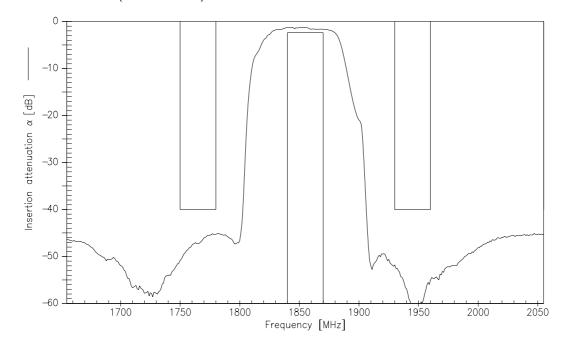

Transfer function (wideband measurement)

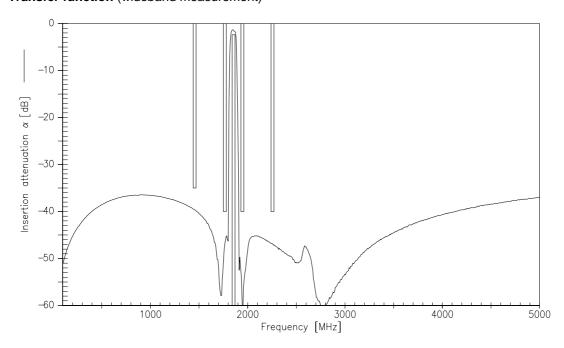



B7832


Low-Loss Filter for Mobile Communication


1855,00 MHz

Data Sheet



Matching (measurement)

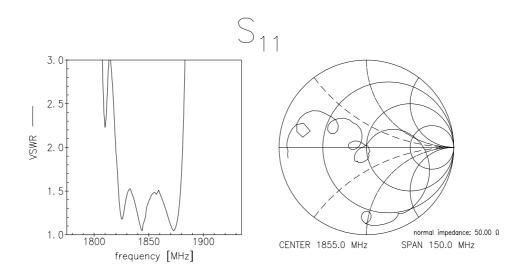

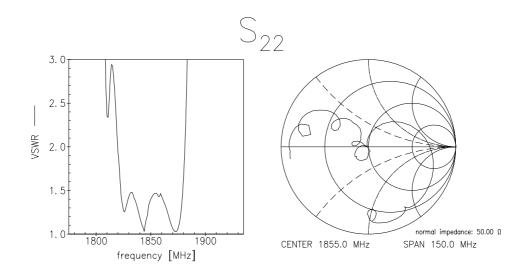



Low-Loss Filter for Mobile Communication

1855,00 MHz

Data Sheet



Published by EPCOS AG Surface Acoustic Wave Components Division, SAW COM WT PD P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.