


- Common Mode Filter Choke for Telecom Application
- Designed for 4-Wire Links, such as ISDN-S/T and T1/E1/CEPT
- High Frequency Chokes for EMI Reduction
- 500 Vrms Hipot


### Electrical Parameters @ 25° C

OCL ( $\mu$ H Min.)	Interwinding Capacitance (pF Max.)	Leakage Inductance ( $\mu$ H Max.)	DCR ( $\Omega$ Max.)
22.5	17	0.23	0.30


Typical Impedance

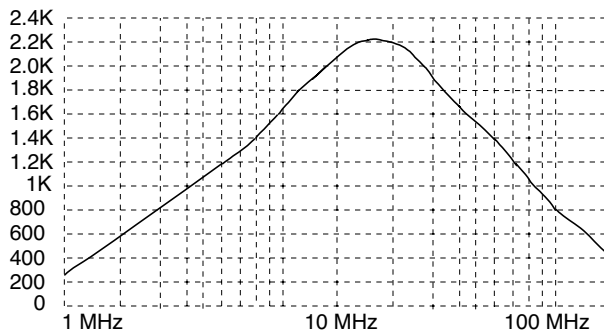


Typical Common Mode Attenuation

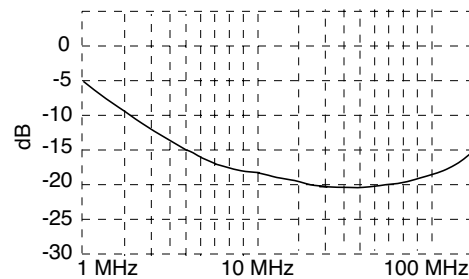

### Package

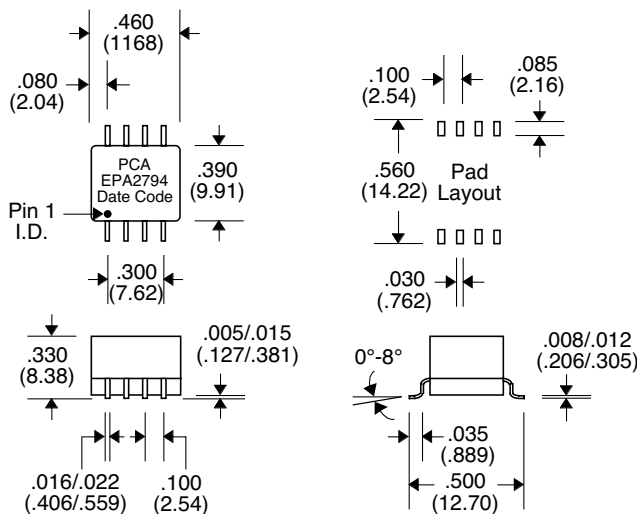

### Schematic



Unless Otherwise Specified Dimensions are in Inches /mm  $\pm .010 / .25$