


used for: DIN EN 60603 TYPE "R"




**NOTES:**

1. INSULATORS: PBTP GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY  
PLATING: GOLD OVER NICKEL  
50 MATING CYCLES
3. CONNECTOR IS PART MARKED: 121A10569X CONEC ABC

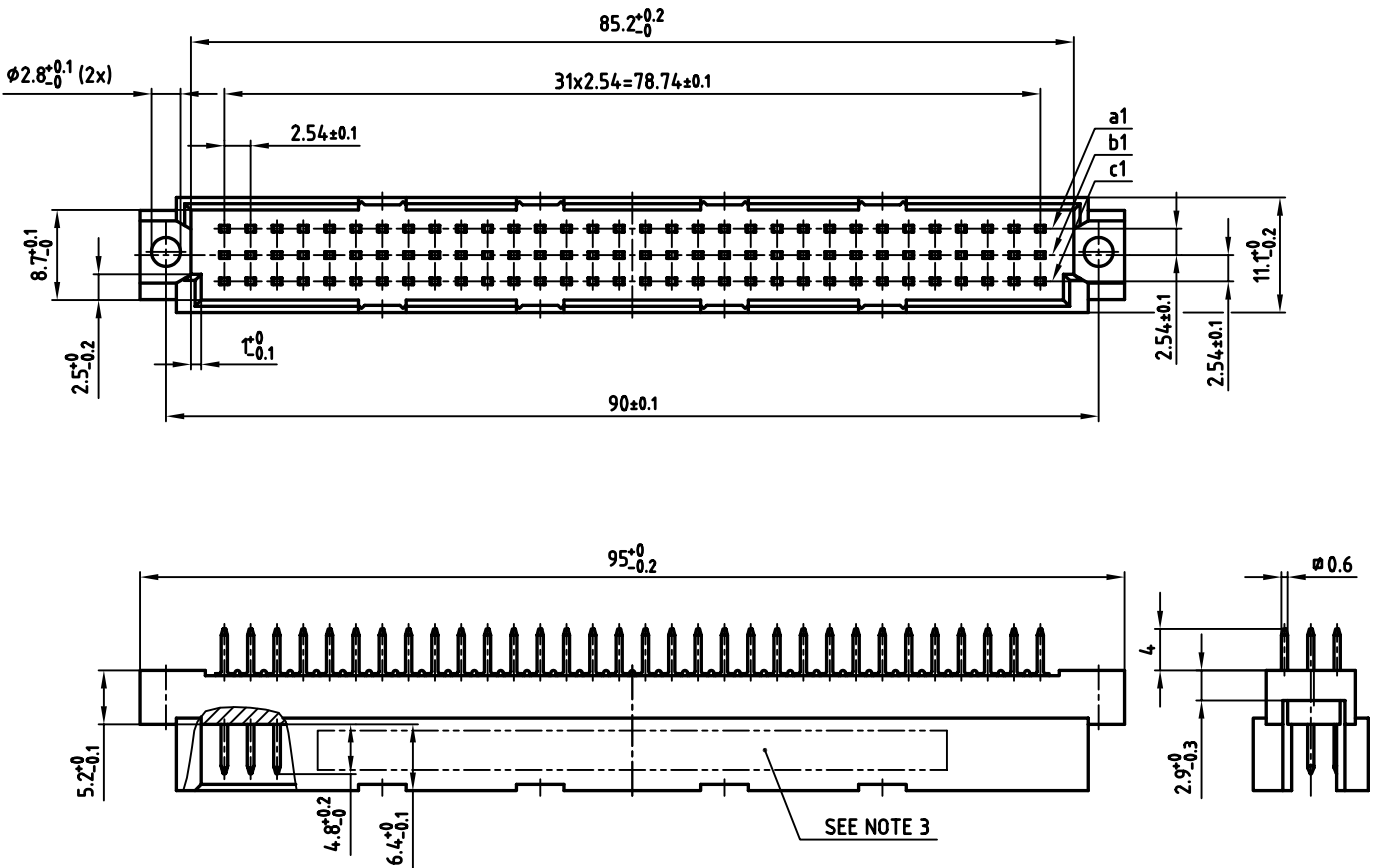

**P.C.B. HOLE DRILLINGS**

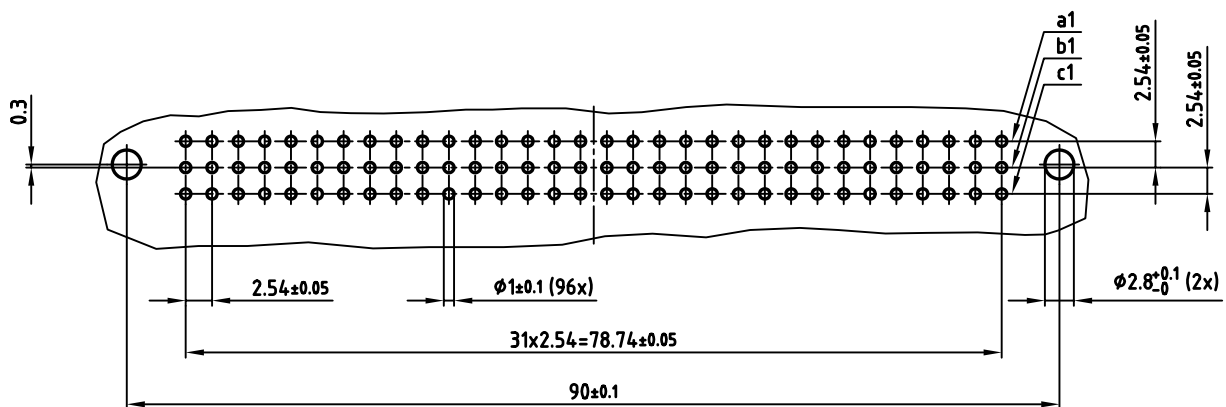

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY, WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	scale:
	2:1
	material:
	SEE NOTES
	title:
	<b>MALE CONNECTOR TYPE "R"</b> 96pos. SOLDER PIN
	dwg no:
	AutoCAD 2004
	part no:
	12K1A419
	121A10569X

2006	date	name
drawn	02.02.	Lehmenkühler
appd.	02.02.	Mickenbecker
norm	DIN EN 60603	
d-old		
dwg no: AutoCAD 2004 part no: 12K1A419 121A10569X		

DIN-A  
3  
sh: 1/1