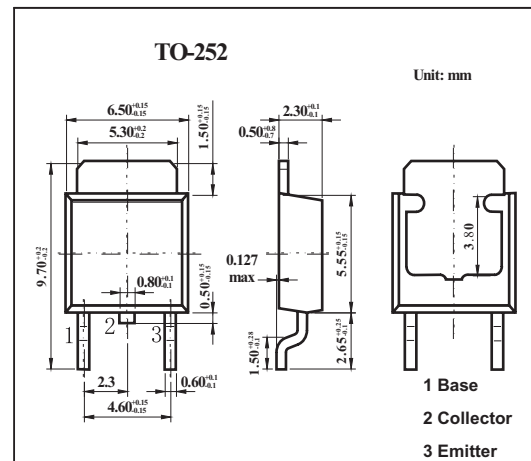


Silicon NPN Triple Diffusion Planar Type

2SD1253,2SD1253A

■ Features

- High forward current transfer ratio h_{FE} which has satisfactory linearity.
- Low collector to emitter saturation voltage $V_{CE(sat)}$.

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit	
Collector-base voltage	V_{CB0}	2SD1253	60	V
		2SD1253A	80	V
Collector-emitter voltage	V_{CE0}	2SD1253	60	V
		2SD1253A	80	V
Emitter-base voltage	V_{EB0}	5	V	
Collector current	I_C	4	A	
Peak collector current	I_{CP}	8	A	
Collector power dissipation	P_C	$T_a = 25^\circ\text{C}$	1.3	W
		$T_c = 25^\circ\text{C}$	40	
Junction temperature	T_j	150	$^\circ\text{C}$	
Storage temperature	T_{stg}	-55 to +150	$^\circ\text{C}$	

2SD1253,2SD1253A

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Collector-emitter voltage	2SD1253	Ic = 30 mA, Ib = 0	60			V
	2SD1253A		80			V
Base-emitter voltage	VBE	VCE = 4 V, Ic = 3 A			2	V
Collector-emitter cutoff current	2SD1253	VCE = 60 V, VBE = 0			400	μA
	2SD1253A		VCE = 80 V, VBE = 0			400
Collector-emitter cutoff current	2SD1253	VCE = 30 V, Ib = 0			700	μA
	2SD1253A		VCE = 60 V, Ib = 0			700
Emitter-base cutoff current	IEBO	VEB = 5 V, Ic = 0			1	mA
Forward current transfer ratio	hFE	VCE = 4 V, Ic = 1 A	40		250	
Forward current transfer ratio		VCE = 4 V, Ic = 3 A	15			
Collector-emitter saturation voltage	VCE(sat)	Ic = 4 A, Ib = 0.4 A			1.5	V
Transition frequency	fT	VCE = 5 V, Ic = 0.5 A, f = 1 MHz		20		MHz
Turn-on time	ton	Ic=4A		0.4		μs
Storage time	tstg	Ib1=-Ib2=0.4 A		1.2		μs
Fall time	tf	VCC=50V		0.5		μs

■ hFE Classification

Rank	R	Q	P
hFE	40~90	70~150	120~250