

## Wireless Bipolar Power Transistor 2W, 1.78-1.90 GHz

M/A-COM Products  
Released - Rev. 07.07


### Features

- Designed for cellular base station applications
- Class AB: -34 dBc typ. 3rd IMD at 2 W PEP
- Class A: +43 dBm typ. 3rd order intercept point
- Common emitter configuration
- Internal input impedance matching
- Diffused emitter ballasting

### ABSOLUTE MAXIMUM RATING AT 25°C

Parameter	Symbol	Rating	Units
Collector-Base Voltage	$V_{CBO}$	65	V
Collector-Emitter Voltage	$V_{CES}$	65	V
Emitter-Base Voltage	$V_{EBO}$	3.0	V
Collector Current	$I_C$	2.0	A
Power Dissipation	$P_D$	13.5	W
Junction Temperature	$T_J$	200	°C
Storage Temperature	$T_{STG}$	-55 to + 150	°C
Thermal Resistance	$\theta_{JC}$	13	°C/W

### Outline Drawing

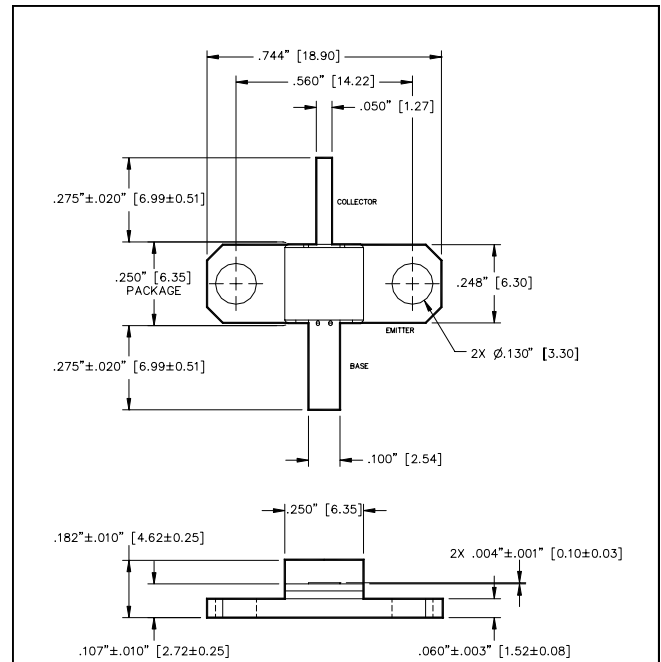


UNLESS OTHERWISE NOTED, TOLERANCES ARE INCHES ±.0005" [MILLIMETERS ±0.13mm]

### ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Symbol	Min	Max	Units	Test Conditions
Collector-Emitter Breakdown Voltage	$BV_{CES}$	65	-	V	$I_C = 5\text{mA}$
Collector-Emitter Leakage Current	$I_{CES}$	-	1.0	mA	$V_{CE} = 25\text{V}$
Collector-Emitter Breakdown Voltage	$BV_{CEO}$	22	-	V	$I_C = 5\text{mA}$
Collector-Emitter Breakdown Voltage	$BV_{CER}$	30	-	V	$I_C = 5\text{mA}, R_{BE}=220\ \Omega$
Emitter-Base Breakdown Voltage	$BV_{EBO}$	3.0	-	V	$I_B = 5\text{mA}$
DC Forward Current Gain	$h_{FE}$	15	120	-	$V_{CE} = 5\text{V}, I_C = 200\text{mA}$
Power Gain	$G_P$	10	-	dB	$V_{CC} = 25\text{V}, I_{CQ} = 25\text{mA}, P_{out} = 2.0\text{W}, F = 1.78, 1.85, 1.90\text{GHz}$
Collector Efficiency	$\eta_C$	35	-	%	$V_{CC} = 25\text{V}, I_{CQ} = 25\text{mA}, P_{out} = 2.0\text{W}, F = 1.78, 1.85, 1.90\text{GHz}$
Input Return Loss	RL	10	-	dB	$V_{CC} = 25\text{V}, I_{CQ} = 25\text{mA}, P_{out} = 2.0\text{W}, F = 1.78, 1.85, 1.90\text{GHz}$
Load Mismatch Tolerance	VSWR	-	5:1	-	$V_{CC} = 25\text{V}, I_{CQ} = 25\text{mA}, P_{out} = 2.0\text{W}, F = 1.78, 1.85, 1.90\text{GHz}$
3rd Order IMD	IMD <sub>3</sub>	-	-32	dBc	$V_{CC} = 25\text{V}, I_{CQ} = 25\text{mA}, P_{out} = 2.0\text{W PEP}, F = 1850\text{GHz}, \Delta F = 100\text{kHz}$

### TYPICAL OPTIMUM DEVICE IMPEDANCES


F (GHz)	$Z_{IN}$ ( $\Omega$ )	$Z_{LOAD}$ ( $\Omega$ )
1.78	6.6+j10.0	6.0+j12.0
1.85	8.4+j10.1	5.7+j11.0
1.90	9.5+j9.9	5.0+j9.0

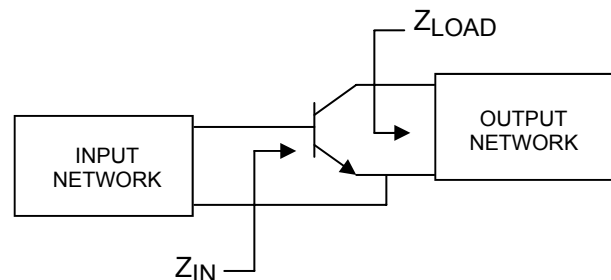


## Wireless Bipolar Power Transistor 2W, 1.78-1.90 GHz

M/A-COM Products  
Released - Rev. 07.07

### TEST FIXTURE DIMENSIONS

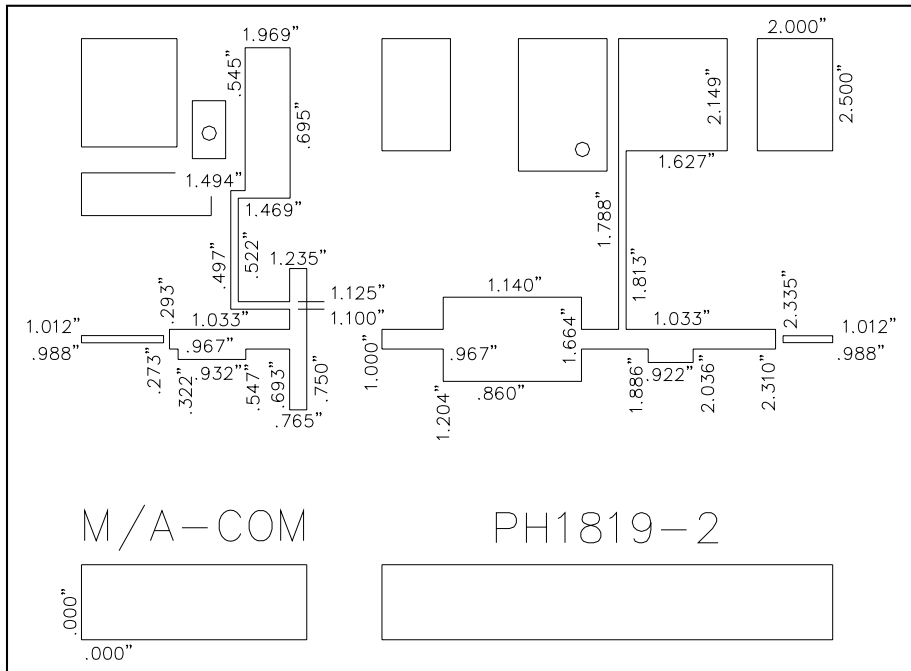

### TEST FIXTURE ASSEMBLY

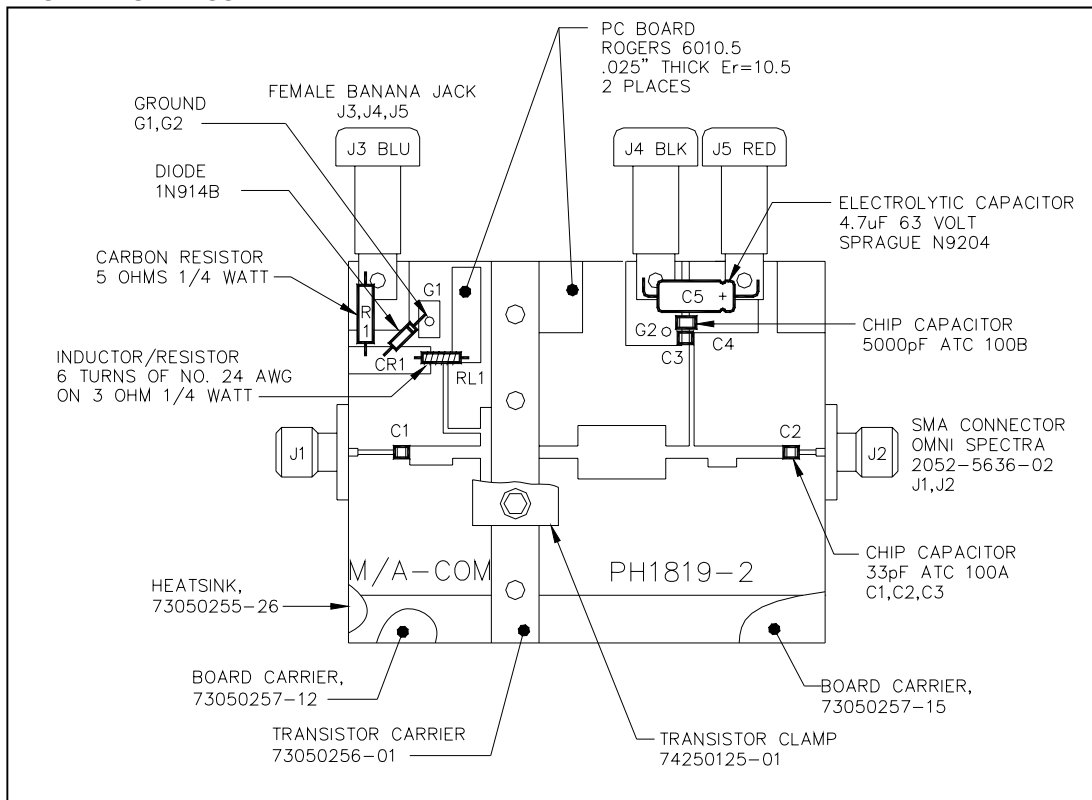

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.







**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

### Typical Broadband Performance Curves

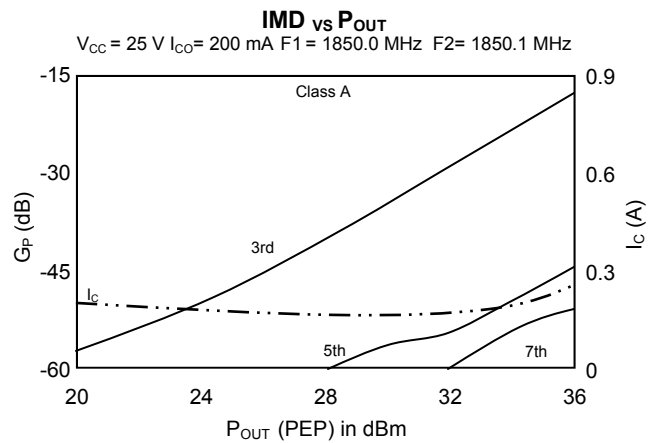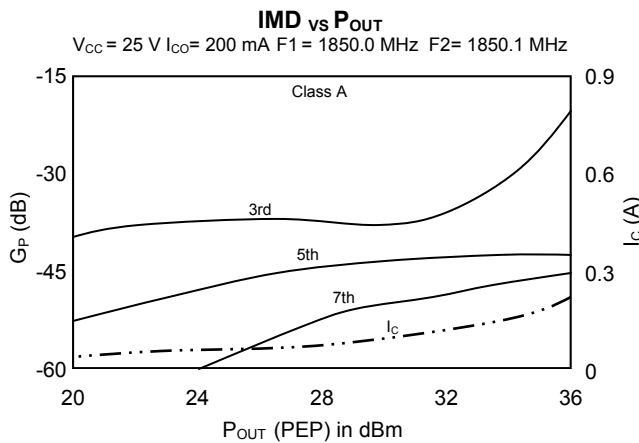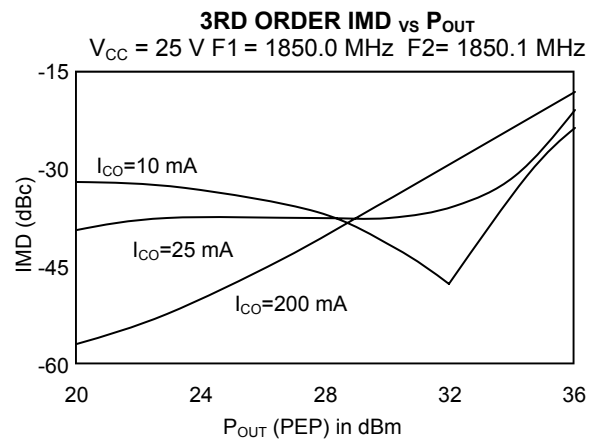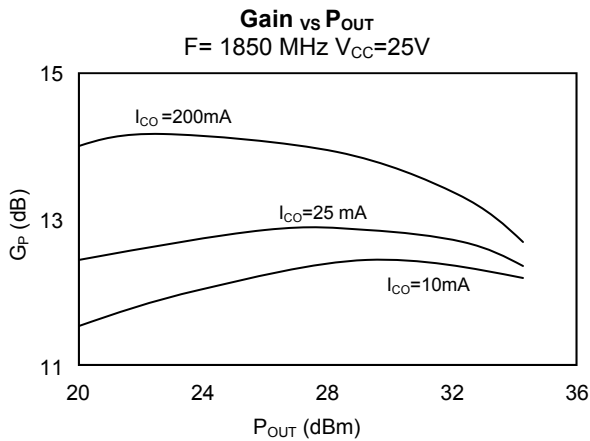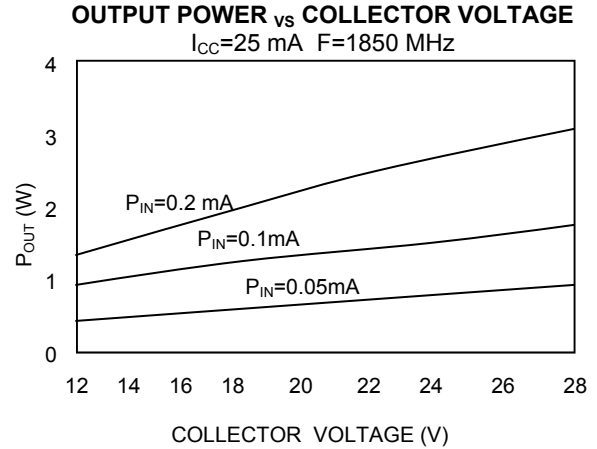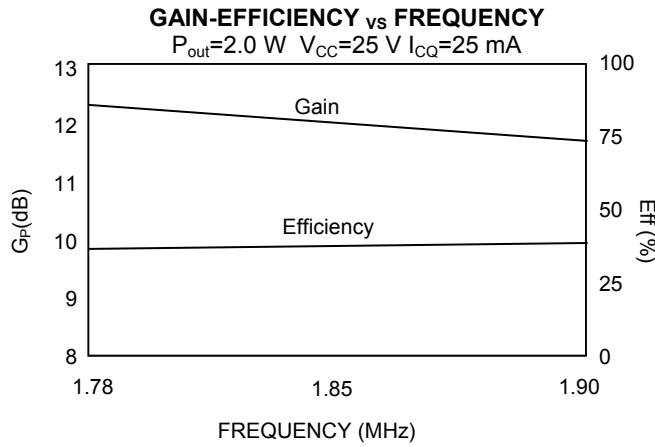

## TYPICAL S-PARAMETERS

V <sub>CC</sub> = 25 V, I <sub>CQ</sub> = 200 mA									
F(MHz)	S11		S21		S12		S22		
	MAG	PHASE	MAG	PHASE	MAG	PHASE	MAG	PHASE	
100	1.10	171.5	23.80	120.3	0.012	-7.4	0.32	-74.5	
200	0.75	175.1	12.15	92.1	0.014	-4.7	0.22	-89.6	
300	0.79	-177.9	7.79	81.2	0.016	-4.5	0.20	-95.7	
400	0.84	-177.4	5.77	74.4	0.016	-9.8	0.23	-98.7	
500	0.87	-178.5	4.65	68.4	0.017	-3.7	0.26	-100.5	
600	0.89	179.8	3.96	62.6	0.018	-5.9	0.27	-101.4	
700	0.89	178.3	3.49	56.7	0.018	-0.7	0.29	-104.4	
800	0.91	177.4	3.08	51.1	0.019	-2.7	0.33	-103.3	
900	0.91	175.4	2.89	45.4	0.017	-3.4	0.36	-111.0	
1000	0.91	174.1	2.74	38.9	0.019	-0.9	0.40	-114.6	
1100	0.89	171.5	2.64	28.9	0.024	-6.1	0.46	-117.3	
1200	0.87	171.7	2.45	22.8	0.024	-13.6	0.53	-120.8	
1300	0.86	170.8	2.35	15.7	0.023	-18.3	0.57	-122.3	
1400	0.86	170.3	2.32	7.6	0.026	-21.1	0.63	-145.5	
1450	0.85	170.1	2.30	3.4	0.026	-22.9	0.65	-126.2	
1500	0.84	169.9	2.27	-1.2	0.025	-22.3	0.66	-127.6	
1550	0.83	169.7	2.26	-6.4	0.026	-31.0	0.68	-129.1	
1600	0.82	169.7	2.24	-11.5	0.030	-37.3	0.71	-131.9	
1650	0.82	170.0	2.22	-16.6	0.029	-43.2	0.71	-133.6	
1700	0.81	170.5	2.19	-22.4	0.027	-48.5	0.73	-137.6	
1750	0.80	171.1	2.14	-28.4	0.025	-52.2	0.76	-140.1	
1800	0.80	171.5	2.11	-35.5	0.026	-60.2	0.76	-143.9	
1850	0.80	171.9	2.05	-40.7	0.027	-60.1	0.81	-147.5	
1900	0.81	172.6	1.99	-47.4	0.024	-67.1	0.81	-150.1	
2000	0.82	173.6	1.83	-60.7	0.024	-80.8	0.86	-155.5	
2100	0.84	174.5	1.61	-74.0	0.020	-94.0	0.88	160.0	
2200	0.88	174.2	1.40	-84.6	0.019	104.7	0.87	164.5	
2300	0.90	173.6	1.21	-94.7	0.016	-128.7	0.86	168.1	