




1. Mechanical Dimensions:

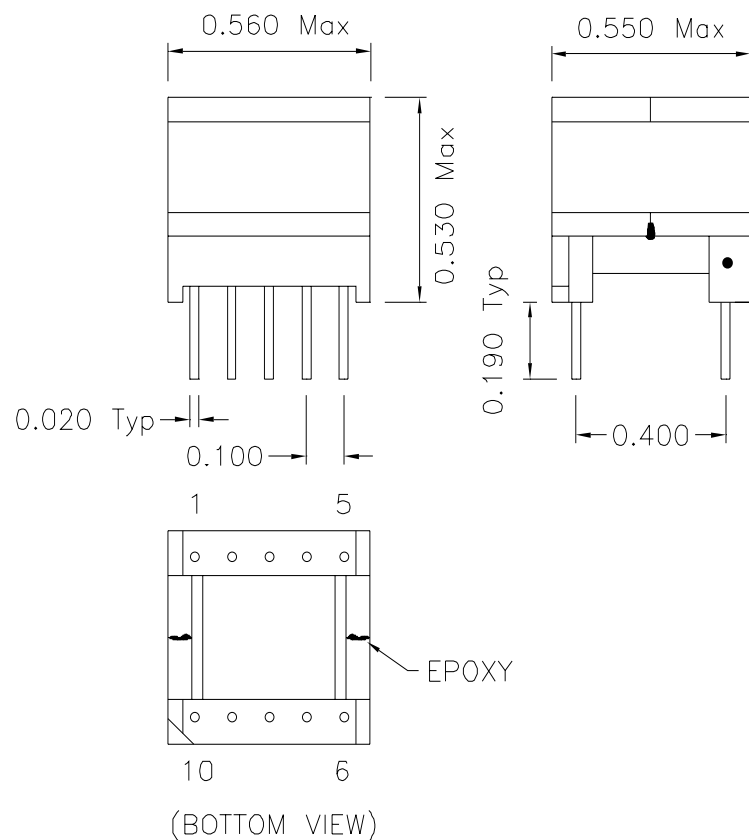

TOP VIEW

2. Schematic:

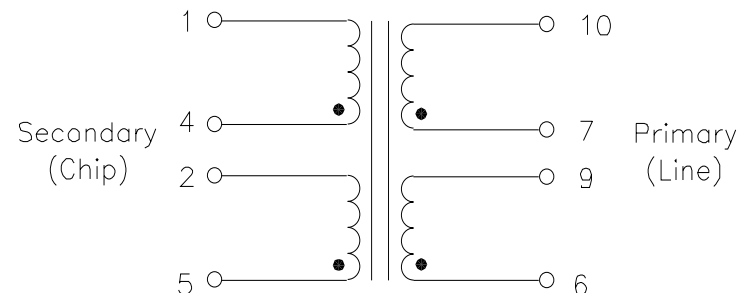

3. Electrical Specifications:

OCL: (Pins 6-10) 800uH±5% 10KHz, 0.1V 0/100mAdc

Leakage L: (Pins 6-10) 10.0uH Max 100KHz, 0.1V
Short Pins 1,2,4&5, tie 9-7

Cw/w: Pins 10-1 30pF Max 100KHz, 0.1V

Turns Ratio: (10-6):(1-5) 2CS:1CS±1% Tie 2-4

DC Res.: (Pins 10-7) 0.74 Ohms Max

DC Res.: (Pins 9-6) 0.74 Ohms Max

DC Res.: (Pins 1-5) 0.77 Ohms Max (Tie 2-4)

HYPOT: 3000VAC Chip-Line

HYPOT: 2000VAC Wdgs-Core

Operating Temp.: -40 to +85°C

Note: Designed to meet the requirements of UL1950, for Supplementary Insulation with 250 working volts.

DOC. REV: A/1

XFMR5 Inc	Title: ADSL TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED	P/N: XFADSL16	REV. A
TOLERANCES: .xxx ±0.010	DWN.	廖玉坤	Jan-28-00
Dimensions in INCH	CHK.	李清儿	Jan-28-00
SHEET 1 OF 1	APP.	Joe Huff	Jan-28-00