



SW-311-PIN V6

Match GaAs SPST Switch, DC-3.0 GHz with TTL/CMOS Control Input


Features

- Integral TTL Driver
- Ultra Low Power Consumption
- Fast Switching Speed: 4 ns Typical
- Surface Mount Package
- 50 Ohm Nominal Impedance
- MIL-STD-883 Screening Available
- Lead-Free CR-9 Package
- 260°C Reflow Compatible

Description

M/A-COM's SW-311-PIN is a GaAs FET SPST absorptive switch with integral silicon ASIC driver. Packaged in a 16-lead ceramic surface mount package, this device offers excellent performance and repeatability from DC to 3 GHz while maintaining low power consumption. The SW-311-PIN is ideally suited for use where fast speed, low power consumption and broadband applications are required. MIL-STD-883 Screening Available.

Functional Block Diagram



Ordering Information

Part Number	Package
SW-311-PIN	Bulk Packaging
MASW-008845-0001TB	Sample Test Board

Note: Reference Application Note M513 for reel size

information.

Note: Die quantity varies.

Pin Configuration

Pin No.	Function	Pin No.	Function
1	Vee	9	GND
2	GND	10	GND
3	GND	11	GND
4	GND	12	RF2
5	RF1	13	GND
6	GND	14	GND
7	GND	15	Vcc
8	GND	16	C1

The metal bottom of the case must be connected to RF and DC ground.

^{*} Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

[•] North America Tel: 800.366.2266 / Fax: 978.366.2266

[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298





SW-311-PIN

Match GaAs SPST Switch, DC-3.0 GHz with TTL/CMOS Control Input

Electrical Specifications: (From –55°C to +85°C), $Z_0 = 50\Omega^{-1.2}$

Parameter	Test Conditions	Frequency	Units	Min	Тур	Max
Insertion Loss	_	DC - 3000 MHz DC - 2000 MHz DC - 1000 MHz DC - 500 MHz	dB dB dB dB	_ _ _	_ _ _ _	1.3 1.2 1.0 0.8
VSWR	_	DC - 3000 MHz DC - 2000 MHz DC - 1000 MHz DC - 500 MHz	Ratio Ratio Ratio Ratio	_ _ _	_ _ _	1.5:1 1.4:1 1.3:1 1.2:1
Isolation	_	DC - 3000 MHz DC - 2000 MHz DC - 1000 MHz DC - 500 MHz	dB dB dB dB	27 36 50 65	_ _ _	_ _ _ _
Trise, Tfall	10% to 90%	_	ns	_	4	_
Ton, Toff	1.3V CTL to 90% / 10%	_	ns	_	12	_
Transients	In-Band	_	mV	_	40	_
1 dB Compression	Input Power	0.05 GHz 0.5 GHz to 3 GHz	dBm dBm	_	+21 +27	_
IP2	Two-Tone Input Power up to +5 dBm	0.05 GHz 0.5 GHz to 3 GHz	dBm dBm	_	+62 +68	_
IP3	Two-Tone Input Power up to +5 dBm	0.05 GHz 0.5 GHz to 3 GHz	dBm dBm	_	+40 +46	_
Vin Low	0V to 0.8V	_	μΑ	_	_	1
Vin High	2.0V to 5.0V	_	μA	_	_	1
Vcc	+5.0V ± 10%	_	mA	_	_	1
Vee	-5.0V to -8.0V	_	mA	_	_	1

^{1.} All specifications apply when operated with bias voltages of +5V for Vcc and -5V for Vee.

^{2.} When DC blocks are used, a 10K ohm return to GND is required on the RFC port.

[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298





SW-311-PIN

Match GaAs SPST Switch, DC-3.0 GHz with TTL/CMOS Control Input

Absolute Maximum Ratings 3,4

Parameter	Absolute Maximum
Max Input Power 50 MHz 500 - 3000 MHz	+27 dBm +34 dBm
Supply Voltages Vcc Vee	+5.5V -8.5V
Control Voltage 5	-0.5V, to Vcc +0.5V
Operating Temperature	-55°C to +125°C
Storage Temperature	-65°C to +150°C

- 3. Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.
- Standard CMOS TTL interface, latch-up will occur if logic signal is applied prior to power supply.


Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Isolation vs. Frequency




Truth Table (Switch)

Control Input	Condition of Switch
C1	RF1 to RF2
0	ON
1	OFF


0 = TTL Low; 1 = TTL High

Typical Performance Curves

Insertion Loss vs. Frequency



VSWR vs. Frequency



- North America Tel: 800.366.2266 / Fax: 978.366.2266
- Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298






SW-311-PIN

Match GaAs SPST Switch, DC-3.0 GHz with TTL/CMOS Control Input

Lead-Free CR-9 Ceramic Package[†]

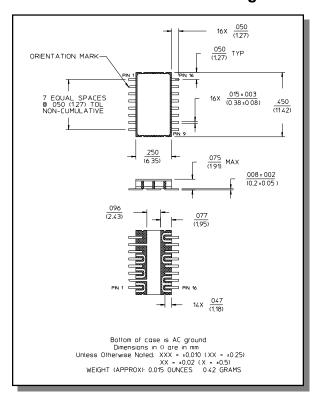

Reference Application Note M538 for lead-free solder reflow recommendations.

information.

[•] Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298