
# **PCI-1757UP**

## 24-ch Digital I/O Low Profile Universal **PCI** Card

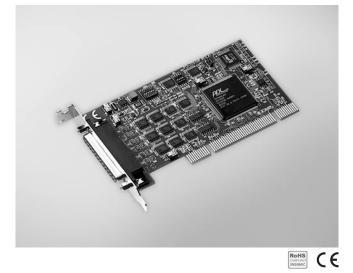

### **Features**

- Low profile PCI form factor
- Universal PCI bus
- 24 TTL level digital I/O channels
- Emulates mode 0 of 8255 PPI
- Buffered circuits provide higher driving capability
- Output status read-back
- I/O configurable by software or on board DIP switch
- Keeps the output settings and values after system hot reset
- BoardID<sup>™</sup> switch •
- Convenient DB25 connector
- Supports both dry and wet contact

# Introduction

PCI-1757UP is a 24-channel digital I/O low profile PCI card that meets the PCI standard REV.2.2 (universal PCI expansion card). The card also works with 3.3 V and 5 V PCI slots, and provides you with 24 parallel digital input/output channels that emulate mode 0 of the 8255 PPI chip. However, the buffered circuits offer a higher driving capability than the 8255.

# **Specifications**

#### **Digital Input**

_	Channela
	Channels

•	Channels	24 (shared with output)
•	Compatibility	5 V/TTL

2

- Input Voltage
- Interrupt Capable Ch.

#### **Digital Output**

- Channels 24 (shared with input) Compatibility 5 V/TTL Output Voltage Logic 0: 0.5 V max. @ -24 mA
- Output Capability

#### General


<ul> <li>Bus Type</li> </ul>	
------------------------------	--

- I/O Connectors
- Dimensions (L x H)
- Power Consumption
  - Max: 5 V @ 200 mA
- Operating Temperature 0 ~ 70° C (32 ~ 158° F)
- Storage Temperature -20 ~ 80° C(-4 ~ 176° F)
- www.DaStorage Humidity 5~95% non-condensing

# **Ordering Information**

- PCI-1757UP
- ADAM-3925
- 24-ch Digital I/O Low Profile Universal PCI Card DB25 DIN-rail Wiring Board
- DB25 Cable, 1 m
- PCL-10125-1 PCL-10125-3
- PCLD-782B
- PCLD-785B
- DB25 Cable, 3 m 24-ch IDI Board w/ 20-pin & 50-pin Flat Cables
- 24-ch Relay Board w/ 20-pin & 50-pin Flat Cables

## **Pin Assignments**

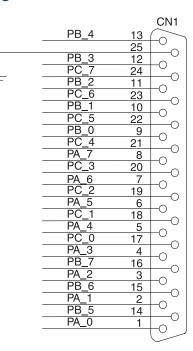

#### www.DataSheet4U.com

AD\ANTECH

Logic 0: 0.8 V @ -0.2 mA Logic 1: 2.0 V @ 20 mA

Logic 1: 3.7 V max. @ 24 mA

Sink: 24 mA

Source: 15 mA

Universal PCI V2.2

1 x DB25 female connector

Typical: 5 V @ 140 mA

120 x 64 mm (4.7" x 2.5") Low profile MD1