TOLERANCE UNLESS SPECIFIED =	.XXX= +/- .005	.XX= +/- .015	FRACTIONS= +/- .032

FP10-250.DC2

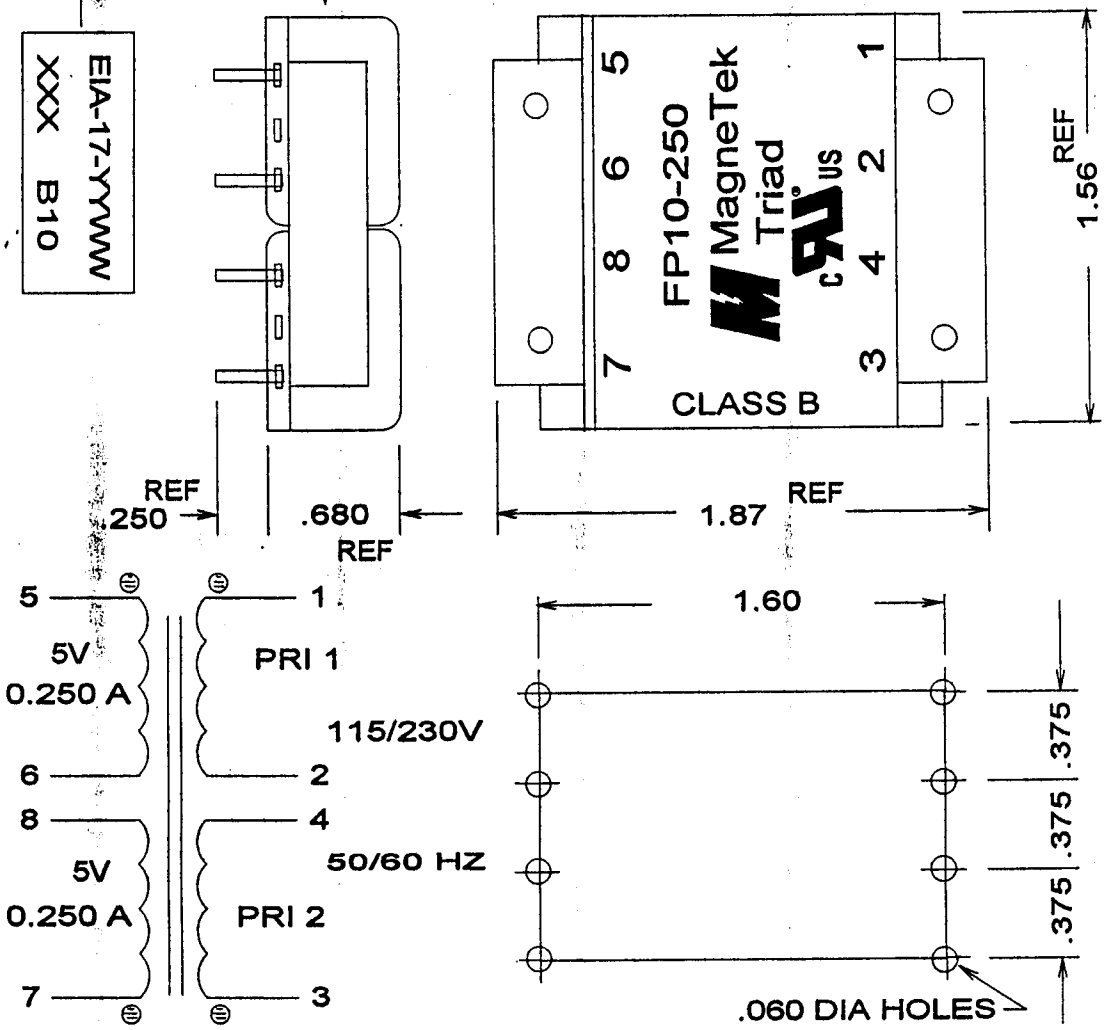

PRODUCTION TESTS

TURNS RATIO = 100%	
DC RESISTANCE IN OHMS	1-2 = 3-4 = 765 TO 930
	5-6 = 7-8 = 2.65 TO 3.45
MAX EXCITATION CURRENT =	.010 A
APPLY = 230V 60HZ, 1-4 (TIE 2+3)	
OPEN CIRCUIT VOLTAGE	
EACH PRI = 114.5 TO 115.5 V	
EACH SEC = 6.5 TO 7.0 V	
HIPOT = 2000V PRI'S TO SEC'S	
1500V PRI'S, SEC'S TO CORE	
500V P-P, S-S	
IMPREGNATION NOTES = PREHEAT 2 HRS	
PINS TO FREE OF IMPREGNATION	

FINAL ASSEMBLY NOTES

MagneTek

METHOD	1 X 1	MARKING ON	PRINTED WRAPPER DATE & SITE CODE ON DECAL

PART NO. FP10-250

FP10-250
10/27/93