



Solderability 255°C ± 2°C 5 ± 0.5s  
 Ambient Temperature -40~70°C  
 Relative Humidity 85% (at 40°C)  
 Mass 11g 12g(NT75-2)

IEC608-2-20 Test 1a minimum 1  
 IEC68-2-3Test Ca



**Qualification inspection:**

Perform the qualification test as specified in the table IV of IEC255-19-1 and minimum sample size 24.

**Safety approvals**


Safety approval	TüV
Load	16A/250VAC 30VDC

**Dimensions (Unit: mm)**

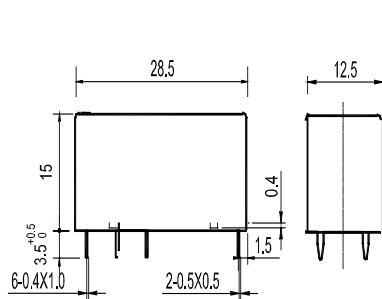

Mounting (Bottom views)

mm	inch
0.4	0.016
0.5	0.020
1.0	0.039
1.3	0.051
1.5	0.059
3.5	0.138
5.0	0.197
7.5	0.295
12.5	0.492
15	0.591
20	0.787
28.5	1.122

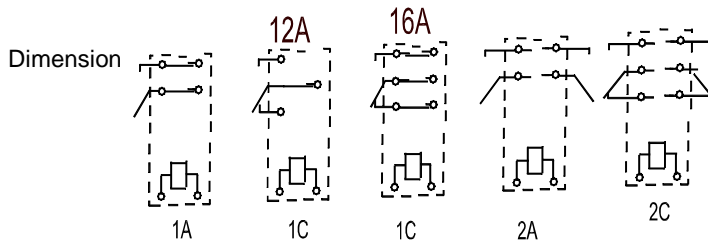

Wiring diagram (Bottom views)

NOTES 1).Dimensions are in millimeter.

2).Inch equivalents are given for general information only.

**Reference Data**

