




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

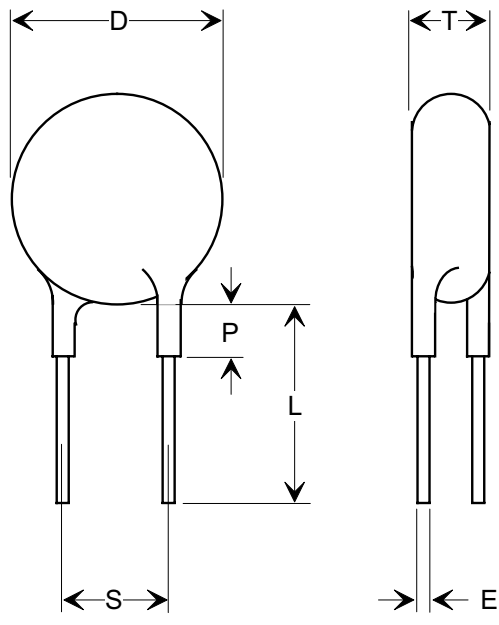

SPECIFICATIONS

TUSONIX STYLE:	805-508	
D (Diameter):	.350 [8.89] MAX.	
T (Thickness):	.156 [3.96] MAX.	
S (Lead Wire Spacing):	.250 ±.031 [6.35 ±0.79]	
L (Lead Wire Length):	1.5 [38.1] MIN.	
E (Lead Wire Diameter):	.025 [0.64] (# 22 AWG.)	
P (Coating on Leads Max.):	.000	
Capacitance Value:	10,000 pF	
Capacitance Tolerance:	+ 80, -20%	
Temperature Coefficient:	Z5V	
Voltage:	Working:	100 VDC
	Test:	300 VDC
	Life:	200 VDC
Marking:	TMK, CAP, TOL., T.C., WVDC SEE NOTE 3.	

- NOTES:
- TUSONIX STANDARD PART NUMBER: 805-508-Z5V0-103Z
 TUSONIX RoHS COMPLIANT PART NUMBER: 805-508-Z5V0-103Z LF
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
 - LEAD FINISH: STANDARD PART #: 60/40 SOLDER PLATED. RoHS PART #: 100% TIN PLATED.
 - PART MARKING: TMK, CAP, TOL, T.C. & WVDC.
 STANDARD PART: WHITE INK.
 RoHS PART: WHITE INK AND GREEN STRIPE IDENTIFIER.
 - JET SEAL (EPOXY) COATED CASE.

REVISION RECORD Original Release C.O. 1312 RDN TO COMP FMT. S.M. 06-08-00 20000530-15-02 ADDED NOTES 1-3, METRIC & CIRCUIT. S.M. 06-07-06 20060601-5-02	--TOLERANCES-- Unless Otherwise Specified	Title DISC		
	DECIMAL ±	Drawn	S.M. 06-08-00	
	ANGLES ±	Approved	T.C. 06-08-00	
	TUSONIX TUCSON, ARIZONA	A	805-508-Z5V0-103Z	