


4 PIN DIP RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

ELT302X Series
ELT305X Series

Features:

- Peak breakdown voltage
 - 400V: ELT302X
 - 600V: ELT305X
- High isolation voltage between input and output (Viso=5000 V rms)
- Compact dual-in-line package
- Pb free and RoHS compliant.
- UL approved (No. E214129)
- VDE approved (No.132249)
- SEMKO approved
- NEMKO approved
- DEMKO approved
- FIMKO approved

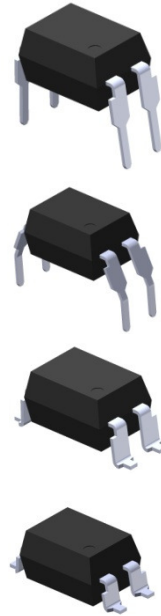

Description


The ELT302X and ELT305X series of devices each consist of a GaAs infrared emitting diode optically coupled to a monolithic silicon random phase photo Triac.

They are designed for interfacing between electronic controls and power triacs to control resistive and inductive loads for 115 to 240 VAC operations.

Schematic

Applications

- Solenoid/valve controls
- Lamp ballasts
- Static AC power switch
- Interfacing microprocessors to 115 to 240Vac peripherals
- Incandescent lamp dimmers
- Temperature controls
- Motor controls



Pin Configuration

1. Anode
2. Cathode
3. Terminal
4. Terminal

4 PIN DIP RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

ELT302X Series
ELT305X Series

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	60	mA
	Reverse voltage	V_R	6	V
	Power dissipation	P_D	100	mW
	Derating factor (above 85°C)		3.8	mW / $^\circ\text{C}$
Output	Off-state Output Terminal Voltage	V_{DRM}	ELT302X 400	V
			ELT305X 600	
	Peak Repetitive Surge Current	I_{TSM}	1	A
	Power dissipation	P_D	300	mW
Derating factor (above 85°C)	7.4		mW / $^\circ\text{C}$	
Isolation voltage ^{*1}		V_{iso}	5000	V rms
Total power dissipation		P_D	330	mW
Operating temperature		T_{opr}	-55~+100	$^\circ\text{C}$
Storage temperature		T_{stg}	-55~+125	$^\circ\text{C}$
Soldering temperature ^{*2}		T_{sol}	260	$^\circ\text{C}$

Notes

*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1 & 2 are shorted together, and pins 3 & 4 are shorted together.

*2 For 10 seconds.

4 PIN DIP RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

ELT302X Series
ELT305X Series

Electrical Characteristics (T_a=25°C unless specified otherwise)

Input

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Forward voltage	V _F	-	1.18	1.5	V	I _F = 10mA
Reverse Leakage current	I _R	-	-	10	μA	V _R = 6V

Output

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition	
Peak Blocking Current	I _{DRM}	-	-	100	nA	V _{DRM} = Rated V _{DRM} I _F = 0mA	
Peak On-state Voltage	V _{TM}	-	-	2.5	V	I _{TM} =100mA peak, I _F =Rated I _{FT}	
Critical Rate of Rise off-state Voltage	ELT302X	dv/dt	-	100	-	V/μs	V _{PEAK} =Rated V _{DRM} , I _F =0 (Fig. 8)
	ELT305X		1000	-	-		

Transfer Characteristics

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
LED Trigger Current	ELT3021 ELT3051	-	-	15	mA	Main terminal Voltage=3V
	ELT3022 ELT3052	-	-	10		
	ELT3023 ELT3053	-	-	5		
Holding Current	I _H	-	250	-	μA	

* Typical values at T_a = 25°C

4 PIN DIP RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

ELT302X Series
ELT305X Series

Typical Performance Curves

Figure 1. Forward Current vs Forward Voltage

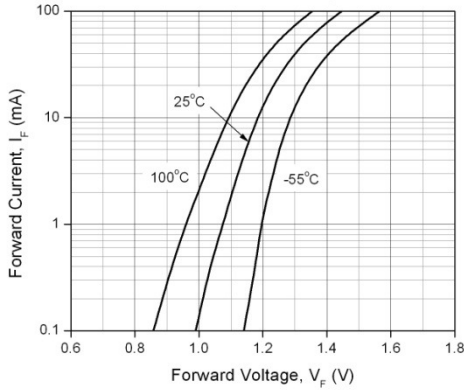


Figure 2. On-State Characteristics

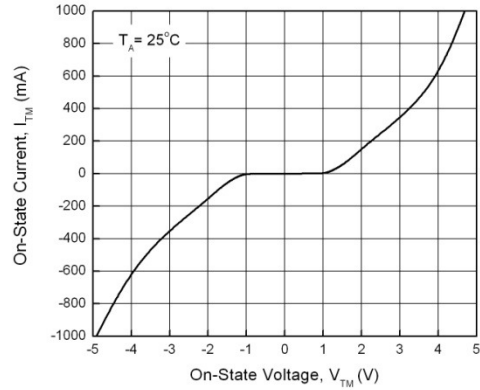


Figure 3. Holding Current vs. Ambient Temperature

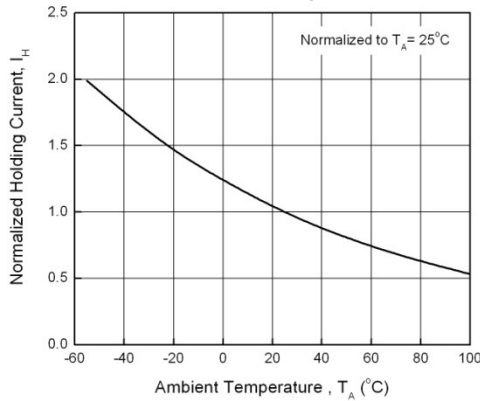


Figure 4. LED Current Required to Trigger vs. LED Pulse Width

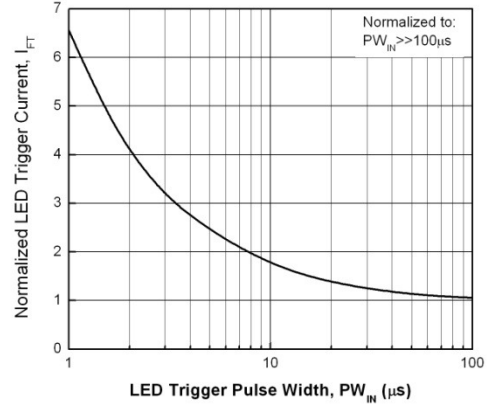


Figure 5. Leakage Current vs. Ambient Temperature


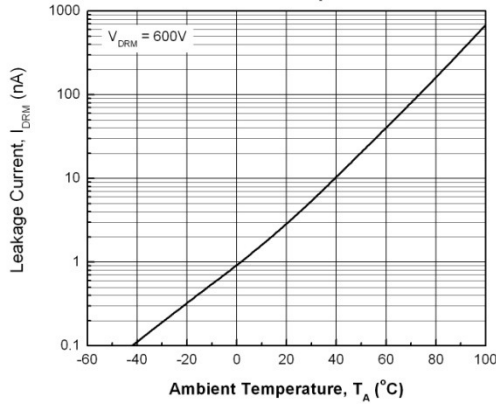


Figure 6. LED Trigger Current vs. Ambient Temperature

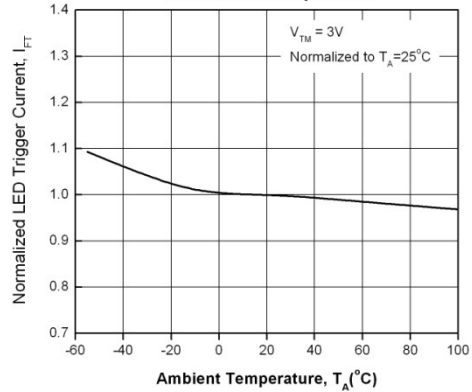

4 PIN DIP RANDOM-PHASE TRIAC DRIVER
PHOTOCOUPLER

ELT302X Series
ELT305X Series


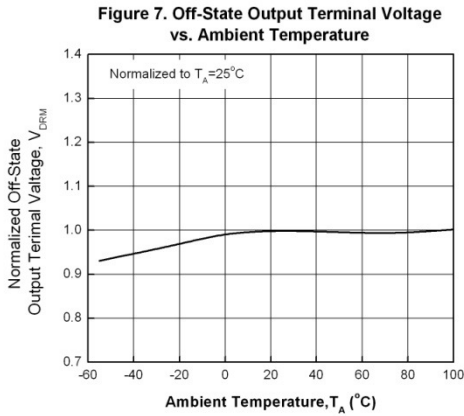


Figure 8. Static dv/dt Test Circuit & Waveform

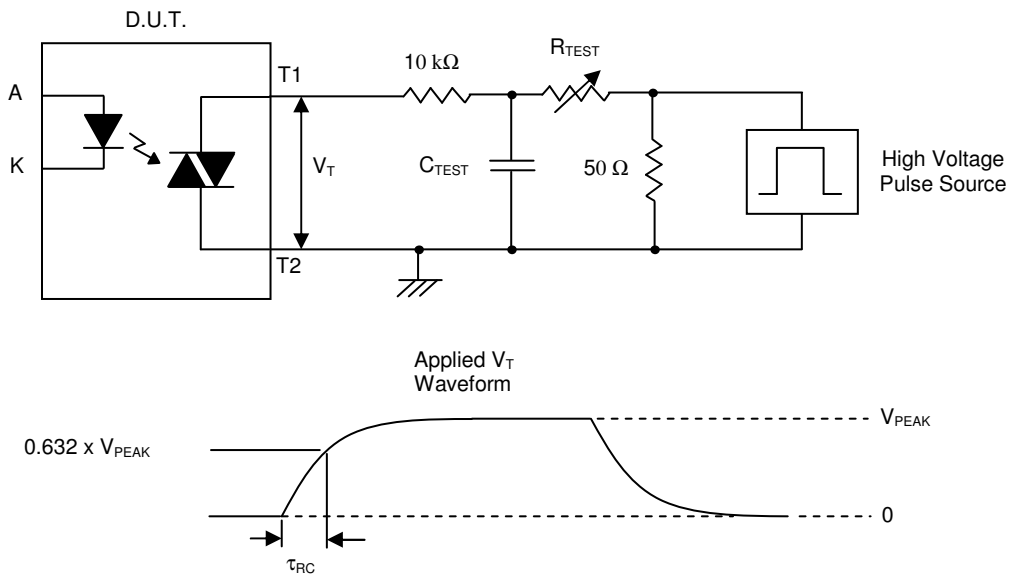

Measurement Method

The high voltage pulse is set to the required V_{PEAK} value and applied to the D.U.T. output side through the RC circuit above. LED current is not applied. The waveform V_T is monitored using a x100 scope probe. By varying R_{TEST} , the dv/dt (slope) is increased, until the D.U.T. is observed to trigger (waveform collapses). The dv/dt is then decreased until the D.U.T. stops triggering. At this point, τ_{RC} is recorded and the dv/dt calculated.

$$dv/dt = \frac{0.632 \times V_{PEAK}}{\tau_{RC}}$$

4 PIN DIP RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

ELT302X Series
ELT305X Series

For example, $V_{PEAK} = 400V$ for ELT302X series. The dv/dt value is calculated as follows:

$$dv/dt = \frac{0.63 \times 400}{\tau_{RC}} = \frac{252}{\tau_{RC}}$$

Order Information

Part Number

ELT302XY(Z)-V
or **ELT305XY(Z)-V**

Note

X = Part No. (1, 2 or 3)

Y = Lead form option (S, S1, M or none)

Z = Tape and reel option (TA, TB, TU, TD or none).

V = VDE safety approved (optional)

Option	Description	Packing quantity
None	Standard DIP-6	100 units per tube
M	Wide lead bend (0.4 inch spacing)	100 units per tube
S (TA)	Surface mount lead form + TA tape & reel option	1000 units per reel
S (TB)	Surface mount lead form + TB tape & reel option	1000 units per reel
S1 (TA)	Surface mount lead form (low profile) + TA tape & reel option	1000 units per reel
S1 (TB)	Surface mount lead form (low profile) + TB tape & reel option	1000 units per reel
S (TU)	Surface mount lead form + TU tape & reel option	1500 units per reel
S (TD)	Surface mount lead form + TD tape & reel option	1500 units per reel
S1 (TU)	Surface mount lead form (low profile) + TU tape & reel option	1500 units per reel
S1 (TD)	Surface mount lead form (low profile) + TD tape & reel option	1500 units per reel




4 PIN DIP RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

ELT302X Series
ELT305X Series




Package Drawings

(Dimensions in mm)

Standard DIP Type




Option M Type

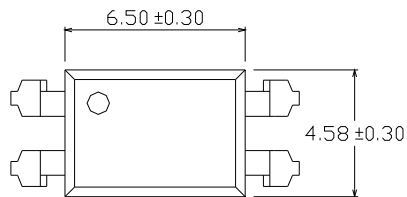


4 PIN DIP RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

ELT302X Series
ELT305X Series

Option S Type

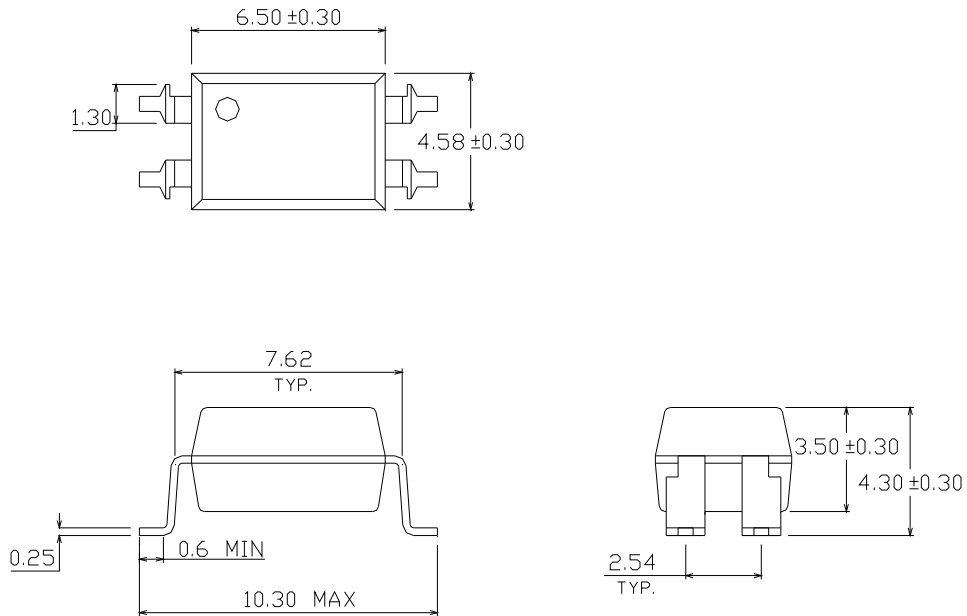


Option S1 Type

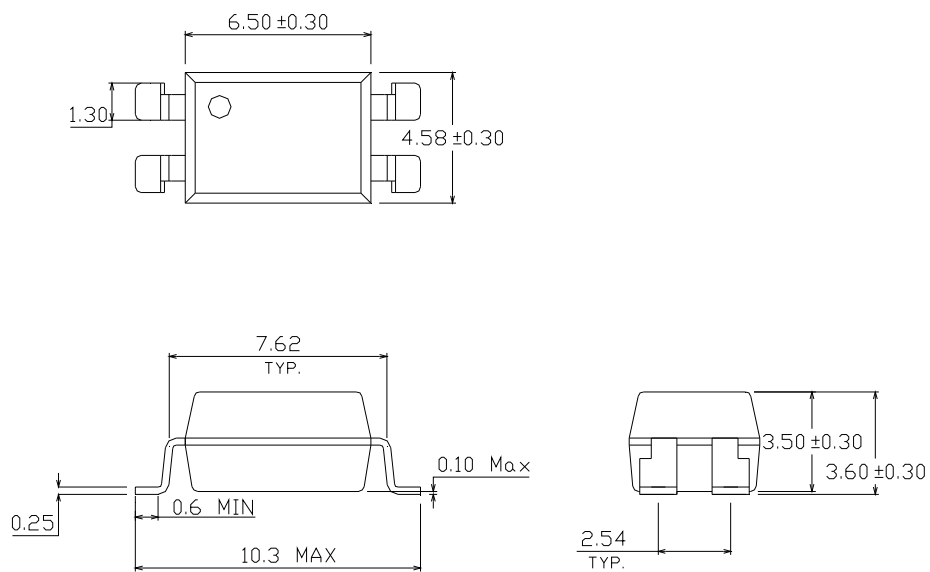

4 PIN DIP RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

ELT302X Series
ELT305X Series

Recommended pad layout for surface mount leadform

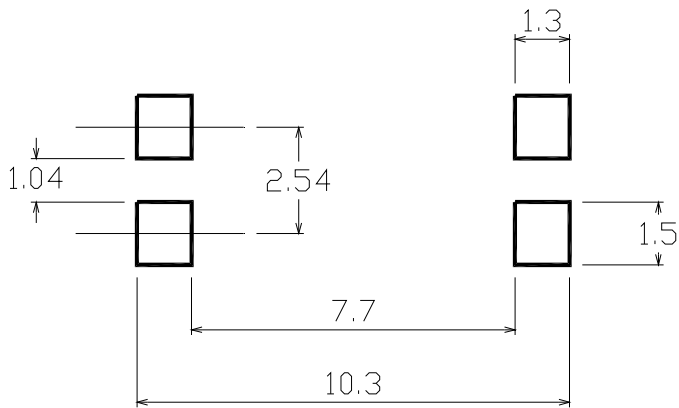

Device Marking



Notes


EL denotes Everlight
T3053 denotes Device Number
Y denotes 1 digit Year code
WW denotes 2 digit Week code
V denotes VDE option

4 PIN DIP RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

ELT302X Series
ELT305X Series


Tape & Reel Packing Specifications

Option TA

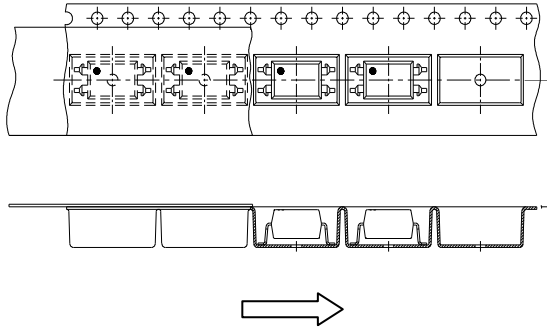


Direction of feed from reel

Option TB

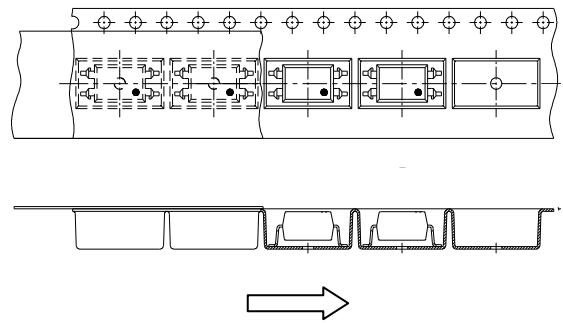

Direction of feed from reel

Tape dimensions

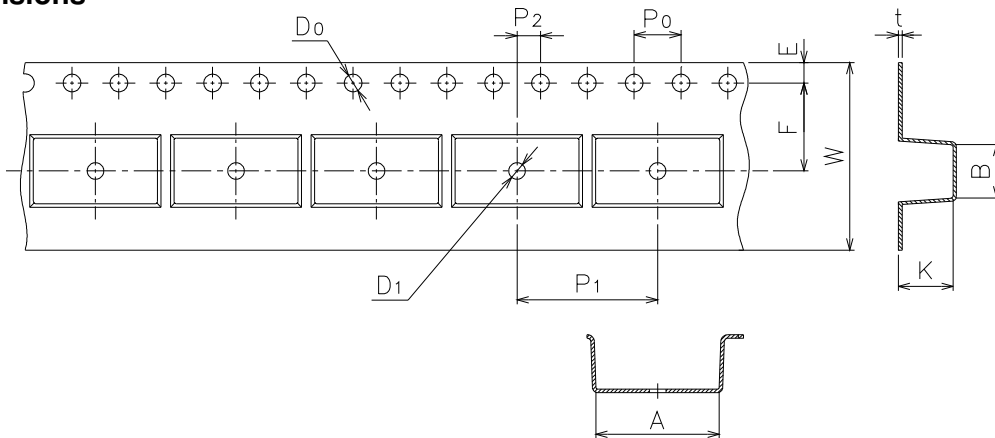


Dimension No.	A	B	Do	D1	E	F
Dimension(mm)	10.4±0.1	4.55±0.1	1.5±0.1	1.5±0.05	1.75±0.1	7.5±0.1
Dimension No.	Po	P1	P2	t	W	K
Dimension(mm)	4.0±0.1	12.0±0.1	2.0±0.1	0.33±0.1	16.0+0.3/ -0.1	4.55±0.1



4 PIN DIP RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

ELT302X Series
ELT305X Series


Option TD

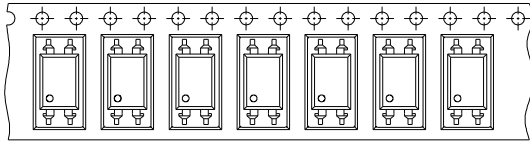

Option TU

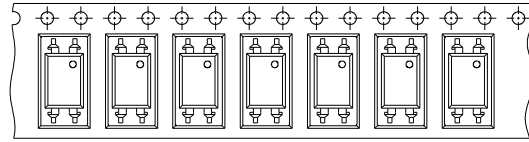


Direction of feed from reel



Direction of feed from reel

Tape dimensions

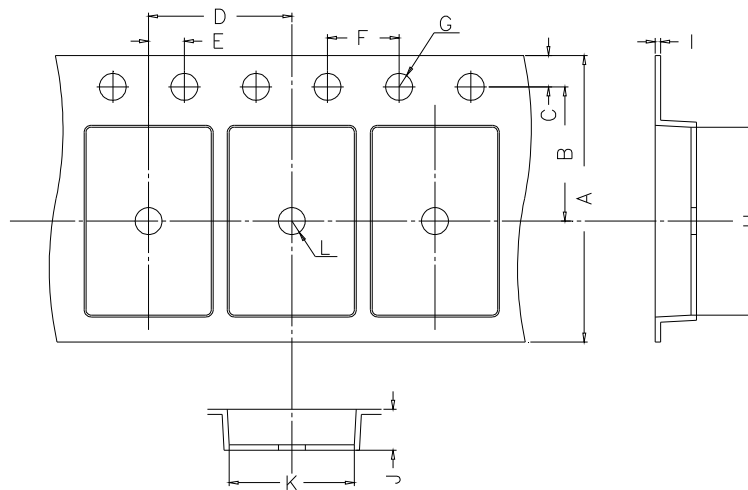


Dimension No.	A	B	C	D	E	F
Dimension(mm)	16.00±0.3	7.5±0.1	1.75±0.1	8.0±0.1	2.0±0.1	4.0±0.1
Dimension No.	G	H	I	J	K	L
Dimension(mm)	1.5+0.1/-0	10.4±0.1	0.4±0.05	4.55±0.1	5.1±0.1	1.5±0.05

4 PIN DIP RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

ELT302X Series
ELT305X Series

Solder Reflow Temperature Profile

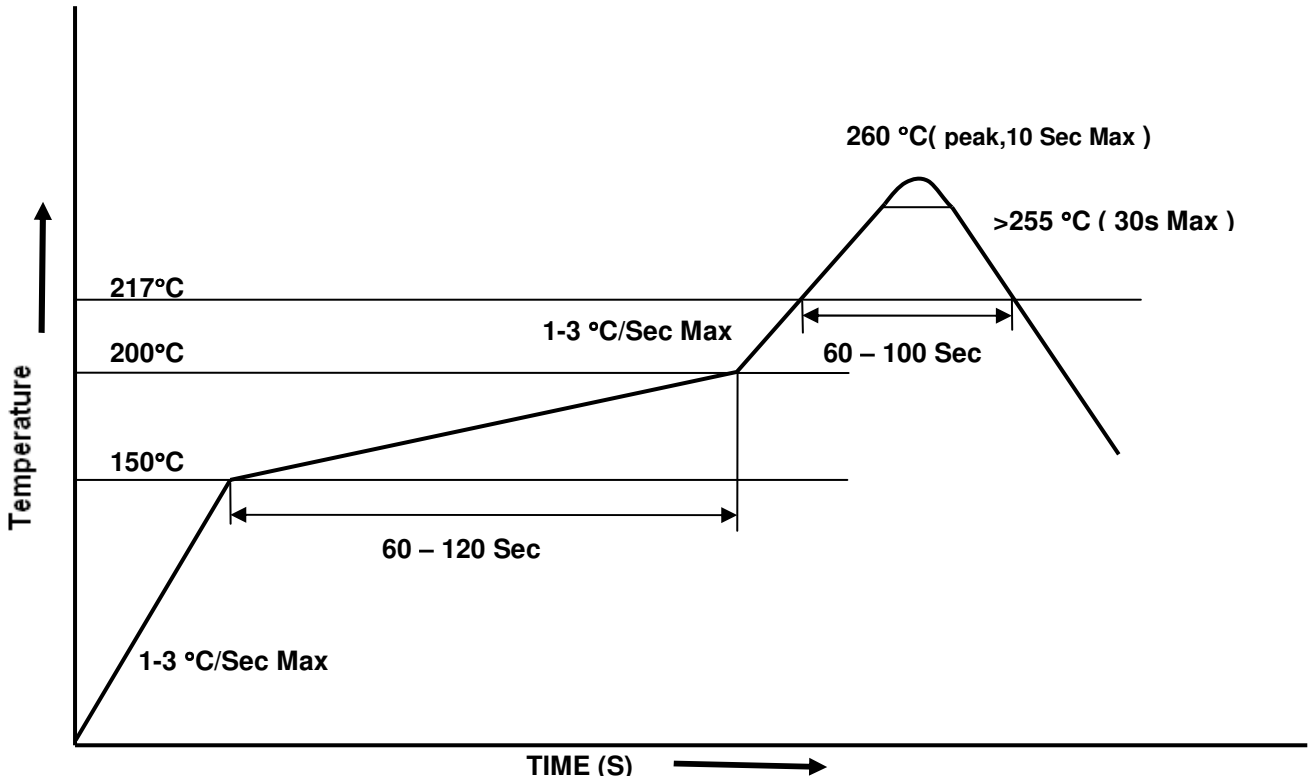

4 PIN DIP RANDOM-PHASE TRIAC DRIVER PHOTOCOUPLER

ELT302X Series
ELT305X Series

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.