

# T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Turns Ratio ( ± 5% )

1:1.15CT & 1:2CT

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.5 & 1.2		mH
Leakage Inductance		0.6	μH
Capacitance ( $C_{ww}$ )		40	pF
Primary DC Resistance		0.7	ohms
Secondary DC Resistance		0.9 & 1.1	ohms
ET Product	10		VμS

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


1500 V<sub>RMS</sub> Isolation (Hi-Pot)

Parts shipped in anti-static tubes. 33 pieces per tube

Surface mount version of this part available. Part# T-11058


Primary Pins 14-12 & 5-7

## PHYSICAL DIMENSIONS All dimensions in inches (mm):

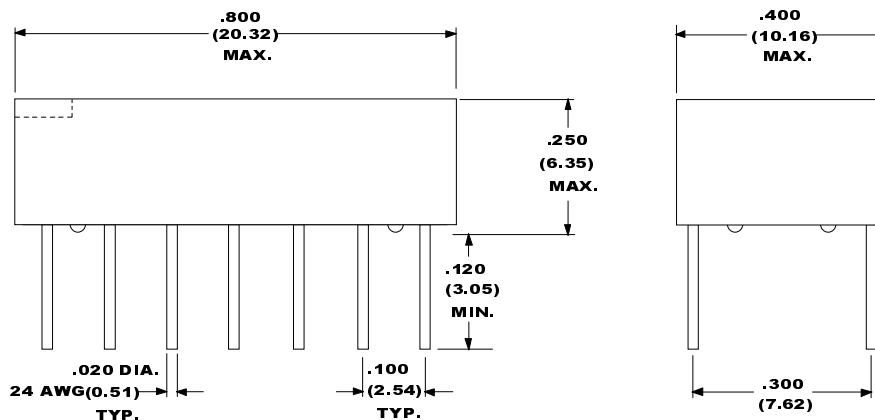

Unused pins not provided

## SCHEMATIC DIAGRAM:

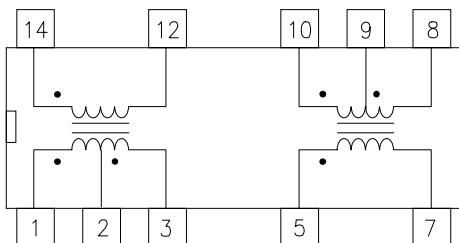

RHOMBUS P/N: **T-10158**

CUST P/N:

NAME:

DATE: **2/23/98**

SHEET: 1 OF 1