


GSD

M39012/30-0502

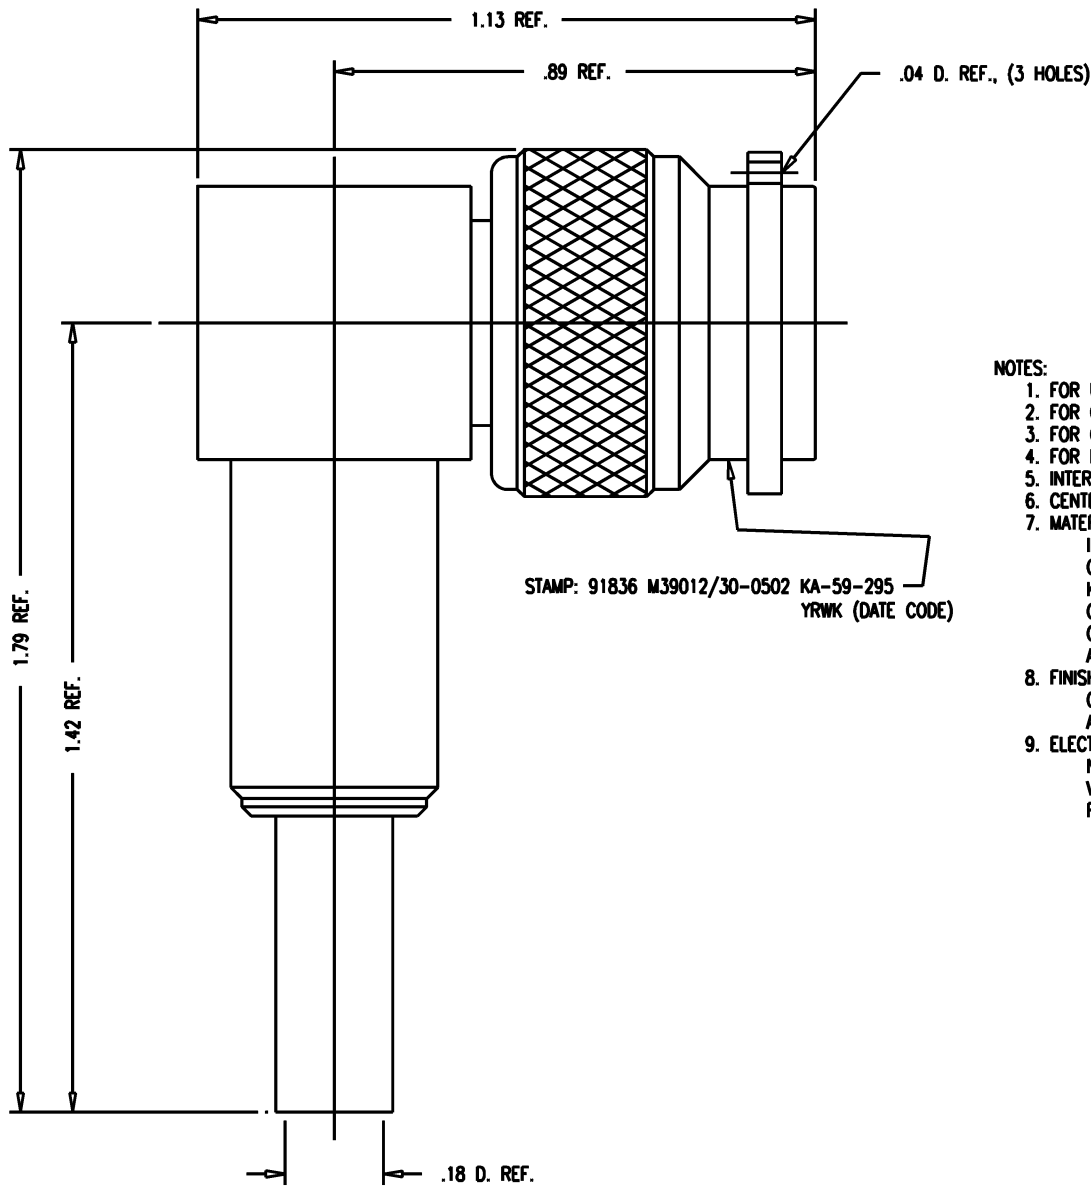

NOTES:

1. FOR USE WITH RG-180 & 195/U CABLES.
2. FOR CABLING INSTRUCTIONS SEE CP-465.
3. FOR CABLE TRIMMING USE KTJ-116 & KTD-161.
4. FOR FORMING USE CRIMP DIE KTH-2007.
5. INTERFACE PER MIL-STD-348, FIG. 313-1.
6. CENTER CONTACT F TO BE SUPPLIED UNASSEMBLED.
7. MATERIALS:
 INSULATORS: TEFLON, ASTM-D-1457
 GASKET: SIL. RUB., ZZ-R-765
 K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
 OUTER CONTACT } BER. COP., ASTM-B-196
 CONTACT F }
 ALL OTHER PARTS: BRASS, ASTM-B16
8. FINISHES:
 CENTER CONTACTS: HARD GOLD PLT. PER MIL-G-45204
 ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
9. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 500 VRMS
 FREQUENCY RANGE: DC TO 11 GHz

REVISIONS

ISSUE	CHANGES
7	CN 33339 E REDRAWN JCA 08/28/91
8	CN 34058 C JCA 09/02/92
9	CN 34481 C JCA 06/07/93
10	CN 35021 A KH 10/22/93
11	CN 39570 C HVN 08/10/06

JCA1987

SCALE 4:1	
APPROX SURFACE AREA	
KA-59-295	
USED ON	
REF:	
PLUG, ANGLE, TNC	
DRAWN JCA	DATE 08/28/91
DESIGN VLS	DATE 08/29/91
APPR.	DATE
 KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	

GSD

M39012/30-0502