



## FEATURES

- ◆ RoHS compliant
- ◆ 24 Pin DIP Package
- ◆ Wide 4:1 input range
- ◆ High efficiency up to 85%
- ◆ Operating temperature -40°C to +85°C
- ◆ Input/output isolation 1500VDC
- ◆ Pin compatible with multiple manufacturers
- ◆ Continuous short circuit protection
- ◆ No heat sink required
- ◆ Industry standard pinout
- ◆ MTBF < 1,000,000 hours

## MODEL SELECTION

**WRA<sup>®</sup> 24<sup>®</sup> 15<sup>®</sup> Z<sup>®</sup> HD<sup>®</sup> -6W(200)<sup>®</sup>**

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ 4:1 Wide Input Voltage Range
- ⑤ Symmetric pin layout DIP24 Package Style
- ⑥ Rated Power(Output current)

## APPLICATIONS

The WRA-ZHD-6W&WRB-ZHD-6W series offer 6 watts of output power from a package in an IC compatible 24 pin DIP configuration without derating to 71°C ambient temperature. WRA-ZHD-6W&WRB-ZHD-6W series have 4:1 wide input voltage of 9-36 and 18-72VDC.



**CE REACH**

MICRODC reserves the copyright

## SELECTION GUIDE

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VDC)	Max Capacitive Load(uF)	Efficiency (%)
WRB2403ZHD-1400	9-36	3.3	1400	1500	1000	75
WRB2405ZHD-6W	9-36	5	1200	1500	680	81
WRB2407ZHD-830	9-36	7.2	830	1500	680	78
WRB2409ZHD-660	9-36	9	660	1500	330	82
WRB2412ZHD-6W	9-36	12	500	1500	100	83
WRB2415ZHD-6W	9-36	15	400	1500	100	83
WRB2418ZHD-330	9-36	18	330	1500	100	83
WRB2424ZHD-6W	9-36	24	250	1500	68	82
WRB4803ZHD-1400	18-72	3.3	1400	1500	1000	75
WRB4805ZHD-6W	18-72	5	1200	1500	680	81
WRB4807ZHD-830	18-72	7.2	830	1500	680	81
WRB4809ZHD-660	18-72	9	660	1500	330	82
WRB4812ZHD-6W	18-72	12	500	1500	100	82
WRB4815ZHD-6W	18-72	15	400	1500	100	85
WRB4818ZHD-330	18-72	18	330	1500	100	83
WRB4824ZHD-6W	18-72	24	250	1500	68	83
WRA2403ZHD-700	9-36	±3.3	±700	1500	±470	80
WRA2405ZHD-6W	9-36	±5	±600	1500	±330	82
WRA2407ZHD-410	9-36	±7.2	±410	1500	±330	80
WRA2409ZHD-330	9-36	±9	±330	1500	±100	82
WRA2412ZHD-6W	9-36	±12	±250	1500	±68	84
WRA2415ZHD-6W	9-36	±15	±200	1500	±68	80
WRA2418ZHD-160	9-36	±18	±160	1500	±68	80
WRA2424ZHD-6W	9-36	±24	±125	1500	±22	81
WRA4803ZHD-700	18-72	±3.3	±700	1500	±470	79
WRA4805ZHD-6W	18-72	±5	±600	1500	±330	82
WRA4807ZHD-410	18-72	±7.2	±410	1500	±330	81
WRA4809ZHD-330	18-72	±9	±330	1500	±100	81
WRA4812ZHD-6W	18-72	±12	±250	1500	±68	83
WRA4815ZHD-6W	18-72	±15	±200	1500	±68	81
WRA4818ZHD-160	18-72	±18	±160	1500	±68	81
WRA4824ZHD-6W	18-72	±24	±125	1500	±22	81

## Parameters

Model	CE
Standards	EN55022 Class A, EN55024
	IEC61000-4-2, Perf. Criteria B
	IEC61000-4-3, Perf. Criteria A
	IEC61000-4-4, Perf. Criteria B (external 220uF/100V cap required)
	IEC61000-4-5, Perf. Criteria B (external 220uF/100V cap required)
	IEC61000-4-6, Perf. Criteria A
	IEC61000-4-8, Perf. Criteria A
	NOTE: Also designed to meet IEC60950-1:2001

an


Input Specifications				
Parameters	Nominal	Typical	Maximum	Units
Voltage range	24	9-36		VDC
	48	18-72		VDC
Filter	π (Pi) Network			
Turn on Transient process time			350	ms
Start up time		500		ms
Absolute Maximum Rating	24 Vin	-0.7-40		VDC
	48 Vin	-0.7-80		VDC
Peak Input Voltage time				ms

Isolation Specifications				
Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	3 sec		1500	VDC
Resistance		> 1000		MOhm
Capacitance		470		pF


Output Specifications				
Parameters	Conditions	Typical	Rated	Units
Voltage accuracy		±1		%
Voltage balance	Dual Output	±1		%
Short Circuit protection	Continuous			
Short circuit restart	Auto-recovery			
Over current protection		120% Iout		
Line voltage regulation (Single)		±0.5		%
Line voltage regulation (Dual)		±0.5		%
Load voltage regulation (Single)				
Load voltage regulation (Single) 3,3V output model	0 – 100% load	±1.5		%
Load voltage regulation (Dual)	0 – 100% load	±0.5		%
Load voltage regulation (Dual) ±3.3V output model	0 – 100% load	±1.5		%
Temperature coefficient		±0.02		%/°C
Ripple & Noise	At 20MHz Bandwidth	60		mV p-p
Rising time		10		ms

General Specifications				
Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	260		KHz
Operating temperature	Full Load without Derating	-40 to +85		°C
Storage temperature		-40 to +125		°C
Max Case temperature			+100	°C
Derating	Not-Required			
Cooling	Free air convection			
Humidity			90	%
Case material	Nickel coated copper			
Weight		26		g
Dimensions (L x W x H)	Tolerance ±0.5 mm or ±0.02 inches	1.28 x 0.84 x 0.41 inches 32.25 x 21.35 x 10.50 mm		
MTBF	>960 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C)			

### TYPICAL CHARECTERISTICS

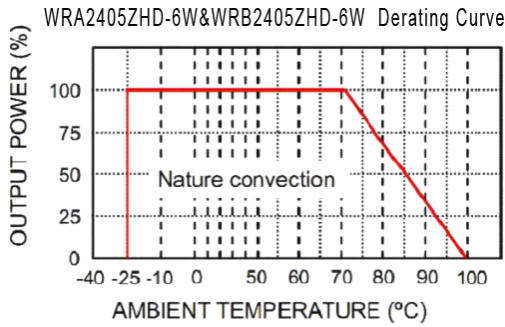


### RECOMMENDED FOOTPRINT

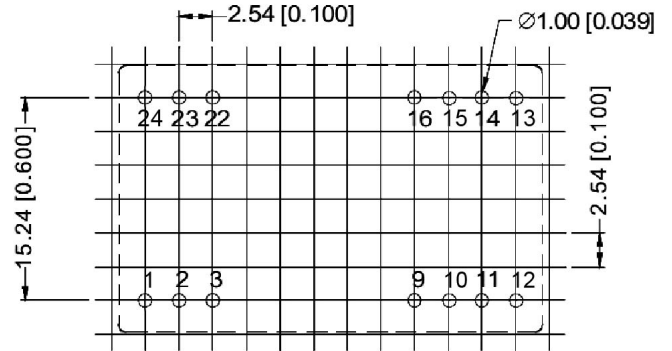

RECOMMENDED FOOTPRINT  
Top view grid:2.54mm(0.1inch)  
diameter:1.00mm(0.039inch)


### MECHANICAL DIMENSIONS

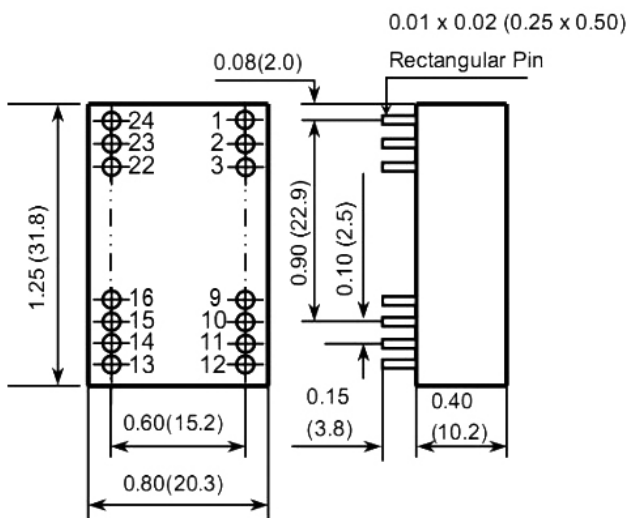

### Pin Out Specifications

PIN	Single	Dual
1, 24	+V Input	+V Input
2, 23	N. C.	-V Output
3, 22	N. C.	Common
9, 16	Omitted	Omitted
10, 15	-V Output	Common
11, 14	+V Output	+V Output
12, 13	-V Input	-V Input

### TUBE OUTLINE DIMENSIONS

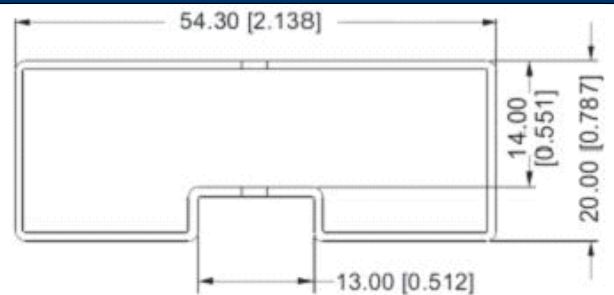

Note:

Unit :mm[inch]

General tolerances:±0.50mm[±0.020inch]

L=230mm[9.055inch] Tube Quantity: 7pcs

#### RoHS COMPLIANT INFORMATION

This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300° C for 10 seconds.  
The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.

#### REACH COMPLIANT INFORMATION

This series has proven that this product does not contain harmful chemicals, it also has harmful chemical substances through the registration, inspection and approval.