


DASH NO. M CODE MADE FROM

**GSD**

KA-91-01

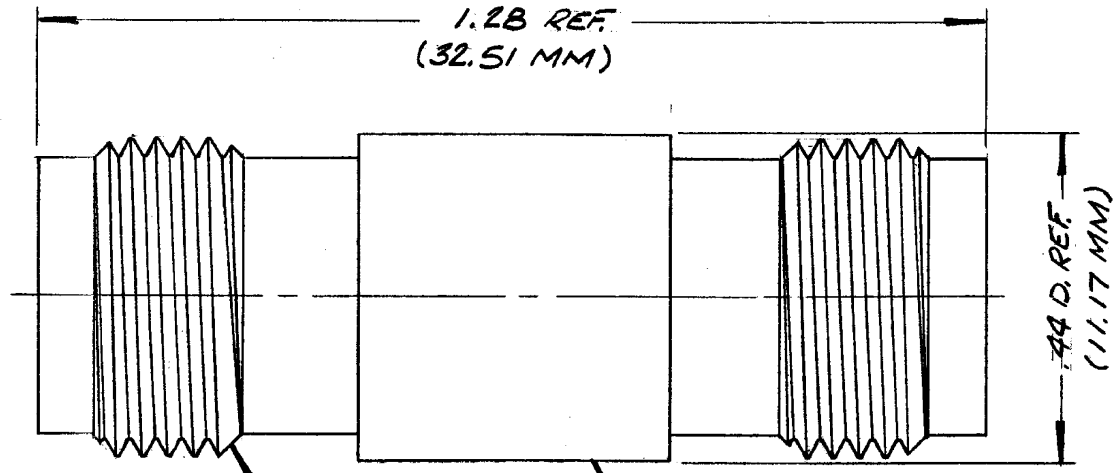

$\frac{7}{16}$  - 28 UNEF - 2A TH'D.  
(BOTH ENDS)

STAMP: KINGS KA-91-01

**NOTES:**

1. MATERIALS:  
 CENTER CONTACT - BERYLLIUM COPPER, QQ-C-530.  
 C-RING - COPPER WIRE, QQ-W-336.  
 ALL OTHER METAL PARTS - BRASS, QQ-B-62L6.  
 INSULATORS - TEFLON, L.P-403
2. FINISHES:  
 ALL METAL PARTS - SILVER PLATE, QQ-S-365.
3. ELECTRICAL CHARACTERISTICS:  
 NOMINAL IMPEDANCE - 50 OHMS.  
 FREQUENCY RANGE - DC-11GHZ.  
 WORKING VOLTAGE - 500 VRMS.

**REVISIONS**

ISSUE	CHANGES
4	CN 1B13D C MA 15MARTB
5	CN 25176 C GJG 17 OCT 83

SCALE: 4:1

APPROX. SURFACE AREA:

USED ON:

REF:

TNC ADAPTER F-F

DRAWN MCD

DATE 12 AUG 83

APPR. GL

DATE 12 AUG 83

**KINGS**  
ELECTRONICS CO., INC.  
TUCKAHOE, NEW YORK 10707

KA-91-01 **GSD**

**UNLESS OTHERWISE SPECIFIED:**

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010  
 3 PLACE DECIMALS ± .004 ANGLES ± 0°30'
- T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.

2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.
6. ALL PLATING IN ACCORDANCE WITH KER 10004.