


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

M39012/27-0504

REVISIONS

ISSUE	CHANGES
8	CN 35910 D REDRAWN KH 12/05/94

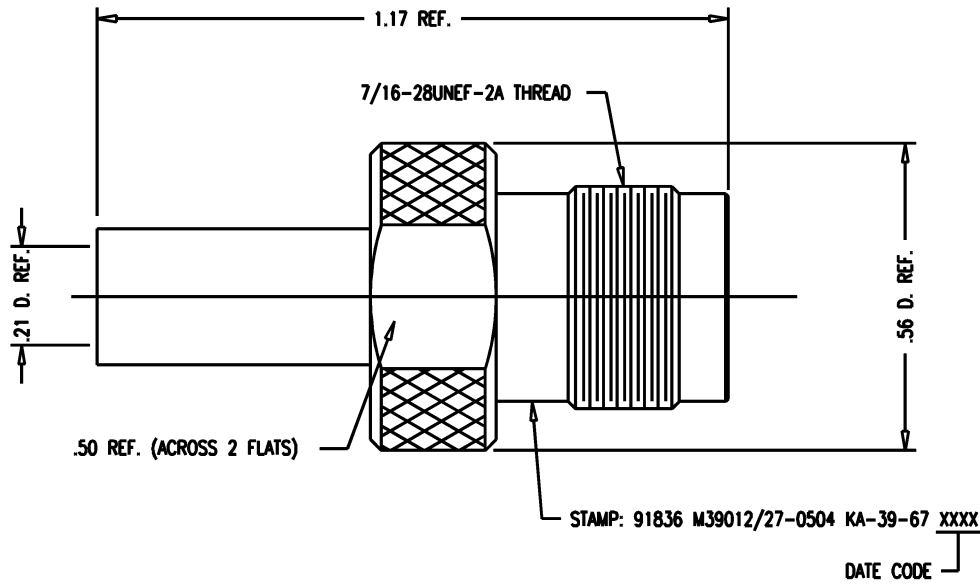

NOTES:

- FOR USE WITH RG-58, & 141/U CABLE GROUPS.
- FOR CABLING INSTRUCTIONS SEE CP-465.
- FOR CABLE TRIMMING USE KTJ-113 & KTD-166.
- FOR CRIMPING USE DIE KTH-2001.
- INTERFACE PER MIL-STD-348, FIG. 313-2.
- MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
K-GRIP SLEEVE: COM. BRONZE, ASTM-B-140
CENTER CONTACT: BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16
- FINISHES:
CONTACT: GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 11 GHz

KAM5065

SCALE 4:1

APPROX SURFACE AREA

KA-39-76

USED ON

REF:

JACK, TNC

DRAWN KH DATE 12/05/94

DESIGN JT DATE 12/06/94

APPR. DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

GSD

M39012/27-0504