

# OH443

## Hall Effect Unipolar IC For High Temperature

### Order Information

Part number	OH443	Operate temperature	-40~150°C	Package	TO-92S	1000pcs/bag
-------------	-------	---------------------	-----------	---------	--------	-------------

### General Description

OH443 includes an on-chip Hall voltage generator for magnetic sensing, an amplifier to amplify Hall voltage, and a comparator to provide switching hysteresis for noise rejection, and an open-collector output pre-driver. While the magnetic flux density (B) is larger than threshold  $B_{OP}$ , the OUT pin turns on (low). When  $B < B_{RP}$ , the OUT pin go into " off " state.



### Features

- High reliability
- High sensitivity
- good temperature performance
- anti-environmental stress

### Applications


- Speed measurement
- Home appliances
- Position detection
- Flow measurement

### Absolute Maximum Ratings ( $T_A=25^\circ C$ )

Supply Voltage  $V_{CC}$ .....4-30V Operating Temperature Range  $T_A$  .....-40 ~ 150°C

Output Current  $I_O$ .....50mA Storage Temperature Range  $T_S$  .....-55~150°C

### Magnetic-electrical Transfer Characteristics Functional Block Diagram:

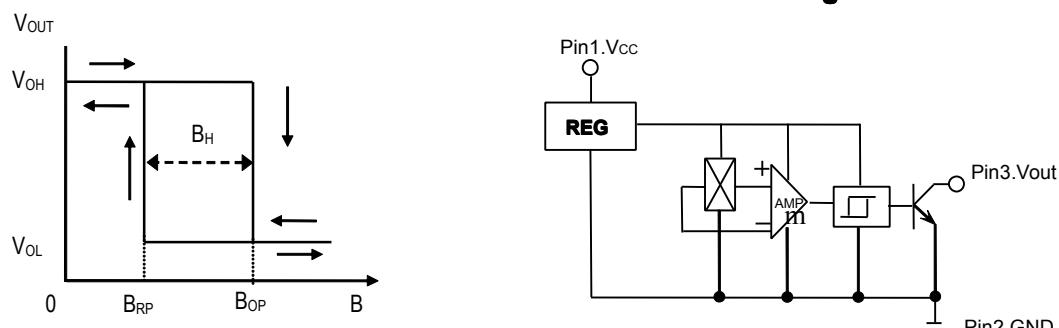

### Electrical Characteristics ( $T_a = 25^\circ C$ )

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Supply Voltage	$V_{CC}$		4	-	30	V
Output Saturation Voltage	$V_{OL}$	$V_{CC}=4.5V$ , $I_{OUT}=20mA$ , $B \geq B_{OP}$	-	200	400	mV
Output Leakage Current	$I_{OH}$	$V_{OUT}=24V$ , $B \leq B_{RP}$	-	1.0	10	$\mu A$
Supply Current	$I_{CC}$	$V_{CC}=V_{CC\max}$ OC output	-	5	-	mA
Output Rise Time	$t_r$	$V_{CC}=12V$ , $R_L=820\Omega$ , $C_L=20pF$	-	0.2	2.0	$\mu S$
Output Falling Time	$t_f$		-	0.18	2.0	$\mu S$


# OH443

Hall Effect Unipolar IC For High Temperature

**Magnetic Characteristics** ( $V_{CC}=4\sim 30V$     $T_a= 25^{\circ}C$  ) (1mT = 10 Gauss)

Parameter	symbol	Value			Unit
		Min	Typ	Max	
Operate Point	B <sub>OP</sub>	-	-	20	mT
Release Point	B <sub>RP</sub>	2	-	-	mT
Hysteresis	B <sub>H</sub>	3	-	6	mT

## **Test Circuit for Reference:**

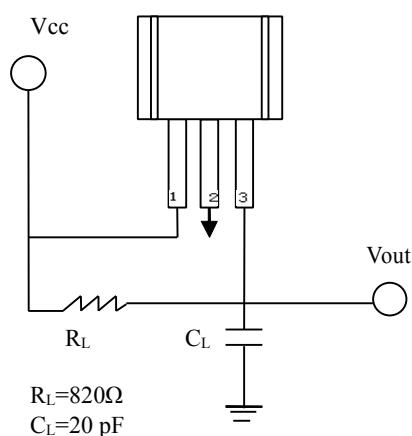

**Pin Descriptions:** 1.Vcc 2. GND 3.Vout

### **Caution:**

- 1)when installing, please minimize mechanical stress on the IC shell and leads.
  - 2)Welding temperature should be lower than 260 °C, less than 3 seconds.
  - 3)IC is OC output, so a pull-up resistor connected pin 1 (power) and pin 3 (output) is necessary.

### **Dimension (unit:mm)**

