


Date Last Revised: 4-4-12

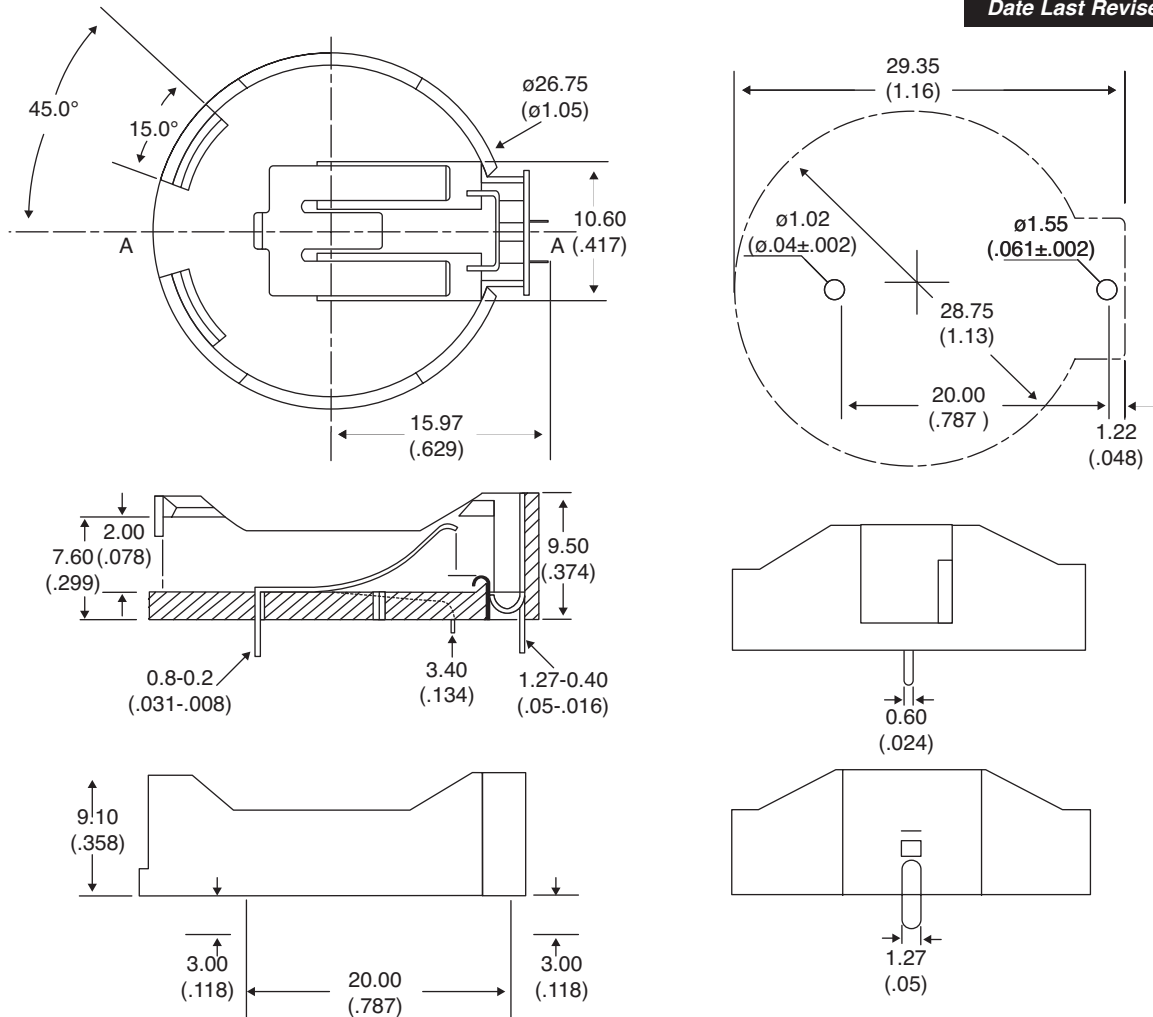

DIMENSIONS: mm (in.)

ELECTRICAL SPECIFICATIONS

Voltage:	250VAC
Contact Resistance:	20m Ω max
Insulator Resistance:	100M Ω at DC 500V
Dielectric Strength:	AC1000V Per minute
Operation Temperature:	-40°C to -85°C

MATERIAL SPECIFICATIONS

Insulator:	Glass Siled PBT
Contact:	Phosphor Bronze
Contact Finian:	Tin/Lead (80u $^{\circ}$ -200u $^{\circ}$) over all
RoHS Compliant	

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

EPD-200698