


Right-angle through hole type male connector for PCB
(Wide insulator type)
FFC-() (T) LBW() ()

For PCB

Right-angle Through hole

RoHS

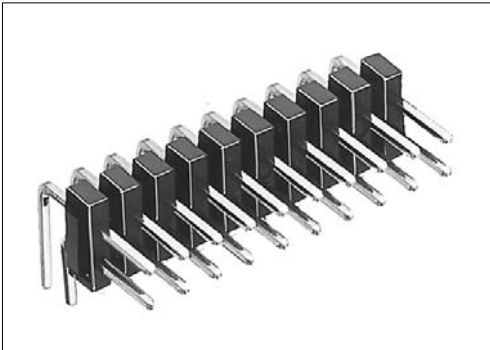

● Configuration of product Part No.

FFC- () (T) L BW () ()

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series name
- ② No. of contacts: 2-70
- ③ Length of contact
Blank: Standard
T, T1-T4 (Refer to the following dimension table.)
- ④ Type of contact
L: Right-angle
- ⑤ Type of contact
BW: 0.635 square contacts, double row type, wide insulator type
- ⑥ Contact plating
1 : Gold plate
21: Tin copper plate
- ⑦ Insulator color
Blank: Blue
B : Black

Recommended PCB layout

● Dimensions

No. of contacts	A	B
2	-	2.54
4	2.54	5.08
6	5.08	7.62
8	7.62	10.16
10	10.16	12.70
12	12.70	15.24
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40
22	25.40	27.94
24	27.94	30.48
26	30.48	33.02
28	33.02	35.56
30	35.56	38.10
32	38.10	40.64
34	40.64	43.18
36	43.18	45.72
38	45.72	48.26
40	48.26	50.80
42	50.80	53.34
44	53.34	55.88
46	55.88	58.42
48	58.42	60.96
50	60.96	63.50
52	63.50	66.04
54	66.04	68.58
56	68.58	71.12
58	71.12	73.66
60	73.66	76.20
62	76.20	78.74
64	78.74	81.28
66	81.28	83.82
68	83.82	86.36
70	86.36	88.90

● Components

①	Insulator
②	Contact

Part No.	C	D	E
FFC-(2-70)LBW() ()	6	1.27	3.54
FFC-(2-70)TLBW() ()	7		12
FFC-(2-70)T1LBW() ()	8.2	1.27	2.8
FFC-(2-70)T2LBW() ()			3.05
FFC-(2-70)T3LBW() ()	6.1	1.52	3.05
FFC-(2-70)T4LBW() ()	8.2	1.27	3.54

Mating connectors: DIC series or HKP series female connector