



1. Dimensions:

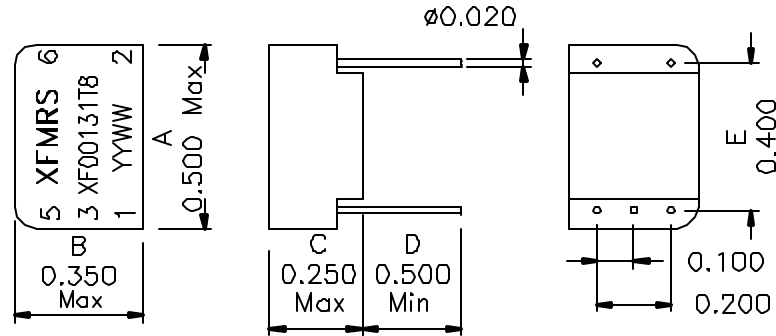

2. Schematic:

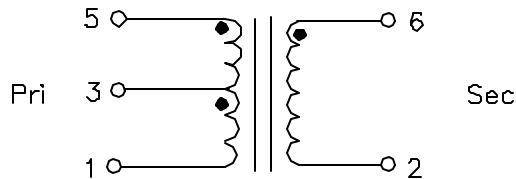

3. Electrical Specifications: @25°C

Isolation Voltage: 1500Vrms (PRI/SEC)
 Turns Ratio: 2CT:1 ±5% (PRI:SEC)
 PRI OCL: 1.2mH Minimum @100KHz 50mV
 PRI LL: 0.50uH Maximum @100KHz 50mV (SEC Shorted)
 Cw/w: 40pF Maximum @100KHz 50mV (PRI/SEC)
 DCR: P5-1 0.70 Ohms Maximum
 DCR: P6-2 1.10 Ohms Maximum
 Remove PIN#4

Note.

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

DOC. REV: A/1

XFMRs Inc UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	Title: T1/CEPT/DS1 MAGNETICS TRANSFORMERS		
	P/N: XF00131T8	REV. A	
	DWN.	廖玉坤	Apr-17-01
	CHK.	李清儿	Apr-17-01
SCALE 2:1 SHT 1 OF 1	APP.	BW	Apr-17-01