



SPN2N7002K

N-Channel Enhancement Mode MOSFET

DESCRIPTION

The SPN2N7002K is the N-Channel enhancement mode field effect transistors are produced using high cell density DMOS technology. These products have been designed to minimize on-state resistance while provide rugged, reliable, and fast switching performance. They can be used in most applications requiring up to 640mA DC and can deliver pulsed currents up to 950mA. These products are particularly suited for low voltage, low current applications such as small servo motor control, power MOSFET gate drivers, and other switching applications.



APPLICATIONS

- Drivers: Relays, Solenoids, Lamps, Hammers, Display, Memories, Transistors, etc.
- High saturation current capability. Direct Logic-Level Interface: TTL/CMOS
- Battery Operated Systems
- Solid-State Relays


FEATURES

- 60V/0.50A , $R_{DS(ON)} = 2.0\Omega @ V_{GS} = 10V$
- 60V/0.20A , $R_{DS(ON)} = 4.0\Omega @ V_{GS} = 4.5V$
- Super high density cell design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability
- SOT-23 package design

PIN CONFIGURATION(SOT-23)



PART MARKING



XX : Date Code



SPN2N7002K

N-Channel Enhancement Mode MOSFET

PIN DESCRIPTION

Pin	Symbol	Description
1	G	Gate
2	S	Source
3	D	Drain

ORDERING INFORMATION

Part Number	Package	Part Marking
SPN2N7002KS23RGB	SOT-23	NKXX

※ SPN2N7002KS23RGB : Tape Reel ; Pb – Free ; Halogen – Free

ABSOLUTE MAXIMUM RATINGS (TA=25 °C Unless otherwise noted)

Parameter	Symbol	Typical	Unit
Drain-Source Voltage	V _{DSS}	60	V
Gate –Source Voltage - Continuous	V _{GSS}	±20	V
Continuous Drain Current(T _J =150 °C)	I _D	0.3	A
TA=25 °C			
Pulsed Drain Current (□)	I _{DM}	0.8	A
Power Dissipation	P _D	0.35	W
TA=25 °C			
Operating Junction Temperature	T _J	-55 ~ 150	°C
Storage Temperature Range	T _{STG}	-55 ~ 150	°C
Thermal Resistance-Junction to Ambient	R _{θJA}	350	°C/W

(*) Pulse width limited by safe operating area



SPN2N7002K

N-Channel Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS (T_A=25°C Unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
Static						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} =0V, I _D =250uA	60			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250uA	1.0	1.7	2.5	
Gate Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±20V			±30	uA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =60V, V _{GS} =0V T _J =25°C			1	uA
		V _{DS} =48V, V _{GS} =0V T _J =70°C			100	
Drain-Source On-Resistance	R _{DSON}	V _{GS} =10V, I _D =0.50A		2.0	3.0	Ω
		V _{GS} = 4.5V, I _D =0.20A		3.0	3.5	
Forward Transconductance	G _{fs(1)}	V _{DS} = 10 V, I _D = 0.6 A	0.08			S
Diode Forward Voltage	V _{SD(1)}	V _{GS} = 0 V, I _S = 0.5A			1.3	V
Dynamic						
Total Gate Charge	Q _g	V _{DD} = 50 V, I _D = 0.6 A, V _{GS} = 4.5 V		0.6	0.8	nC
Gate-Source Charge	Q _{gs}			0.2		
Gate-Drain Charge	Q _{gd}			0.2		
Input Capacitance	C _{iss}	V _{DS} = 25 V, f = 1 MHz, V _{GS} = 0		30	50	pF
Output Capacitance	C _{oss}			7		
Reverse Transfer Capacitance	C _{rss}			4		
Turn-On Time	t _{d(on)}	V _{DD} = 30 V, I _D = 0.6 A R _G = 3.3Ω V _{GS} = 10.0 V R _D = 52Ω		2		ns
	t _r			15		
Turn-Off Time	t _{d(off)}			8		
	t _f			11		

(1) Pulsed: Pulse duration ≤ 300 μs, duty cycle ≤ 2 %.

(2) Pulse width limited by safe operating area.



SPN2N7002K

N-Channel Enhancement Mode MOSFET

TYPICAL CHARACTERISTICS

Fig. 1 $I_D - V_{DS}$

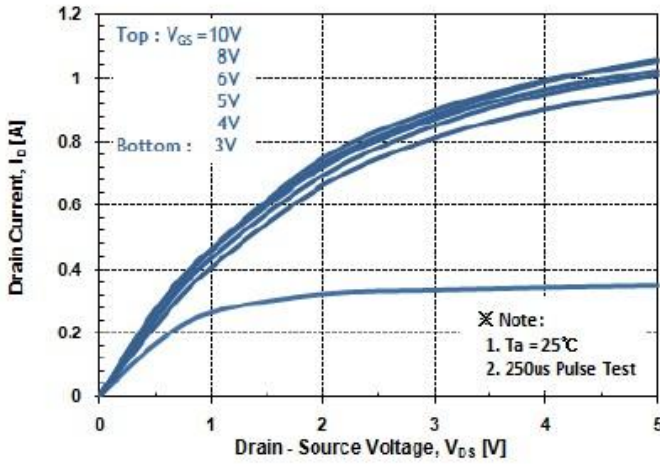


Fig. 2 $I_D - V_{GS}$

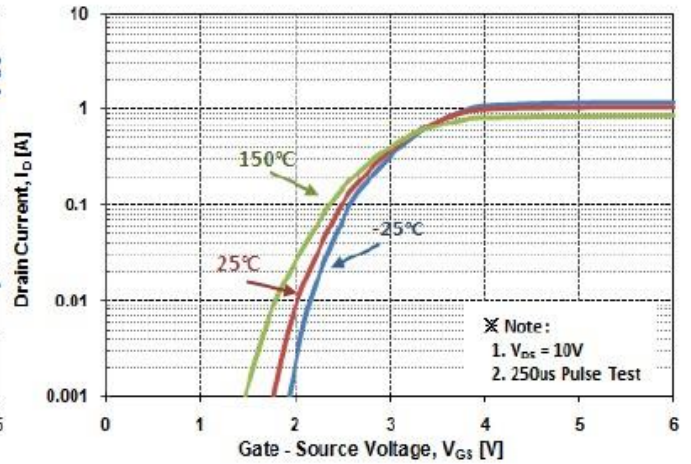


Fig. 3 $R_{DS(ON)} - I_D$


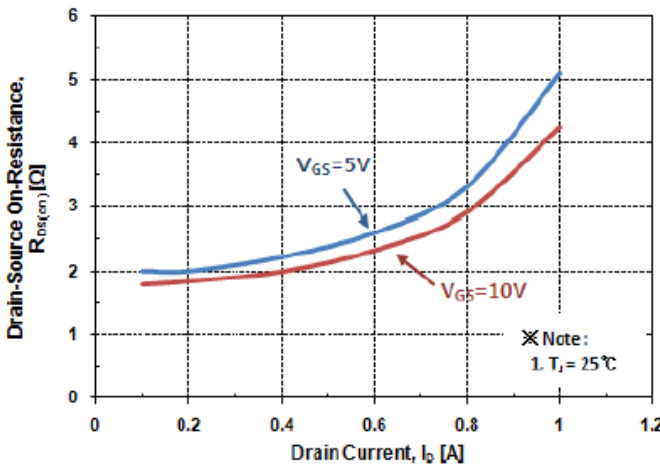


Fig. 4 $I_S - V_{SD}$



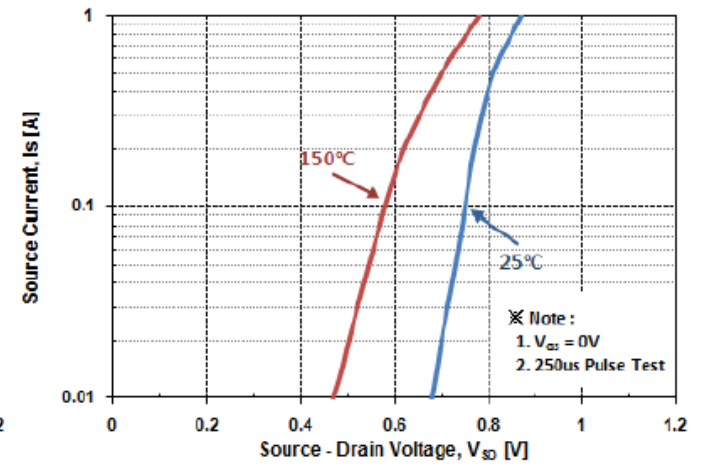

SPN2N7002K

N-Channel Enhancement Mode MOSFET

TYPICAL CHARACTERISTICS

Fig. 5 Capacitance - V_{DS}

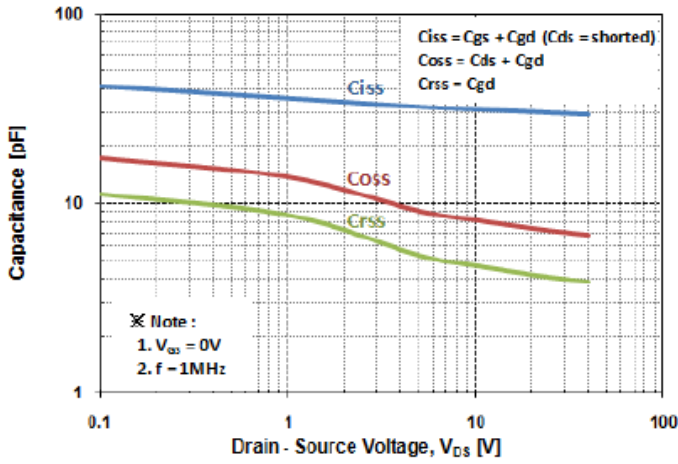


Fig. 6 $V_{GS} - Q_G$

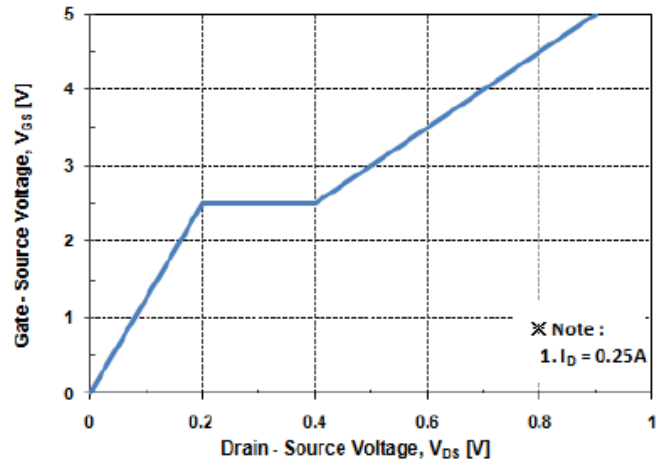


Fig. 7 $V_{DSS} - T_J$


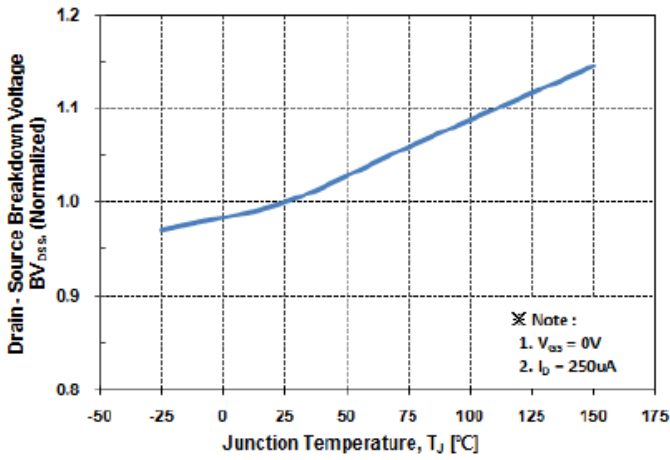


Fig. 8 $R_{DS(on)} - T_J$



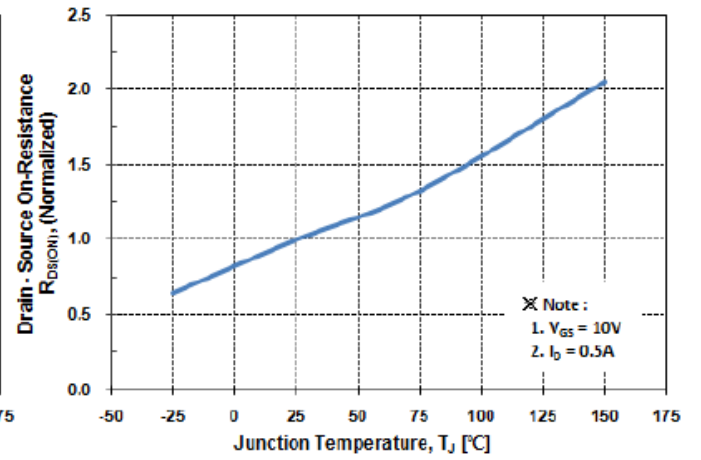

SPN2N7002K

N-Channel Enhancement Mode MOSFET

TYPICAL CHARACTERISTICS

Fig. 9 $I_D - T_C$

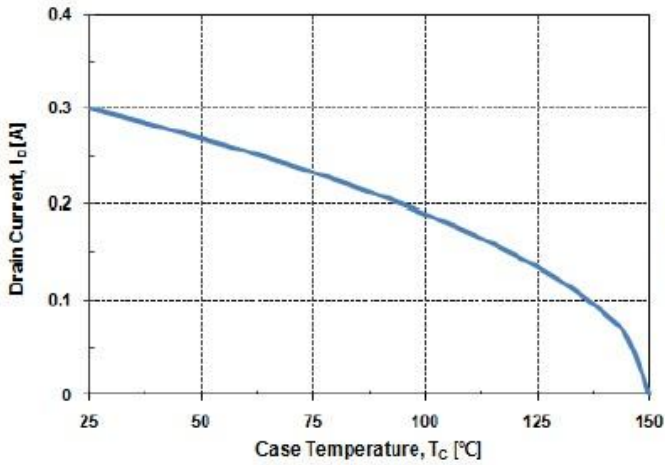


Fig. 10 Safe Operating Area


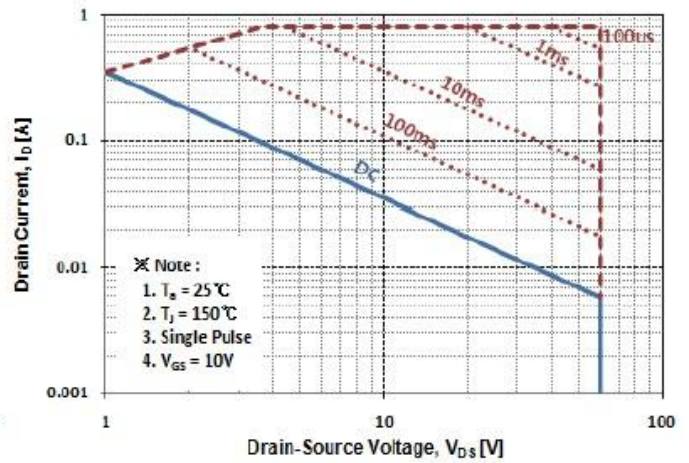


Fig. 11 Transient Thermal Impedance





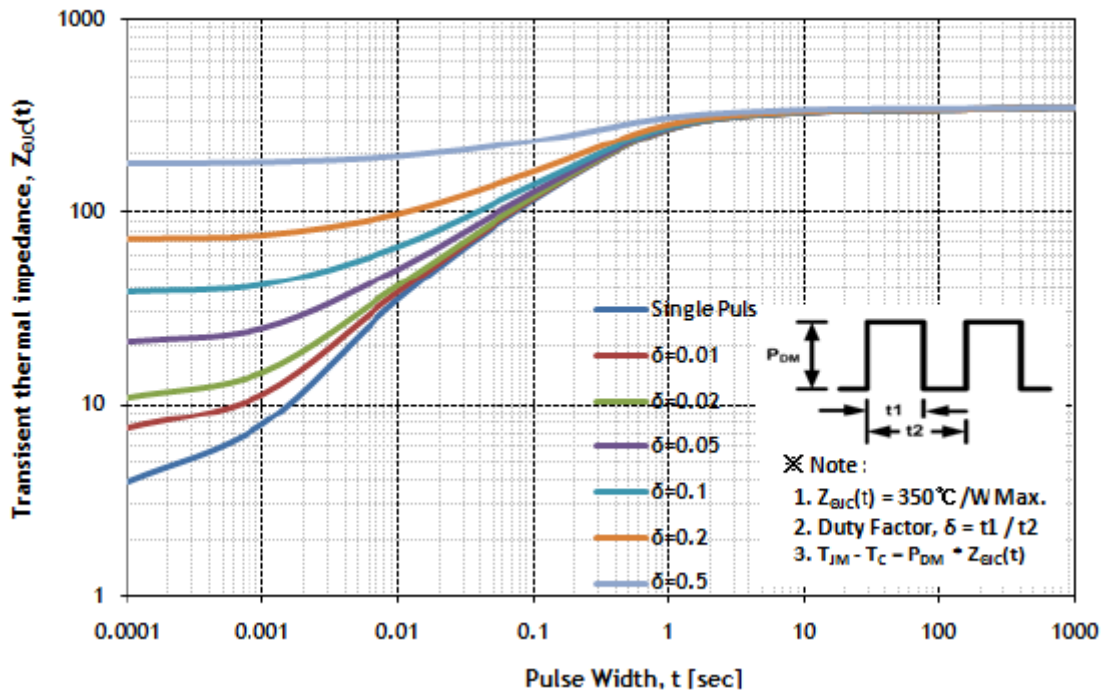

SPN2N7002K

N-Channel Enhancement Mode MOSFET

SOT-23 PACKAGE OUTLINE

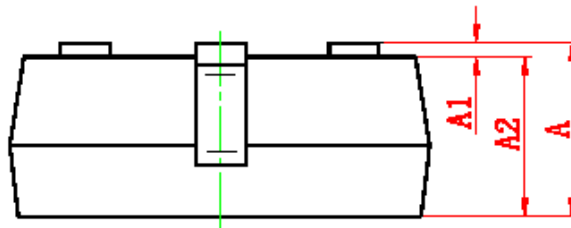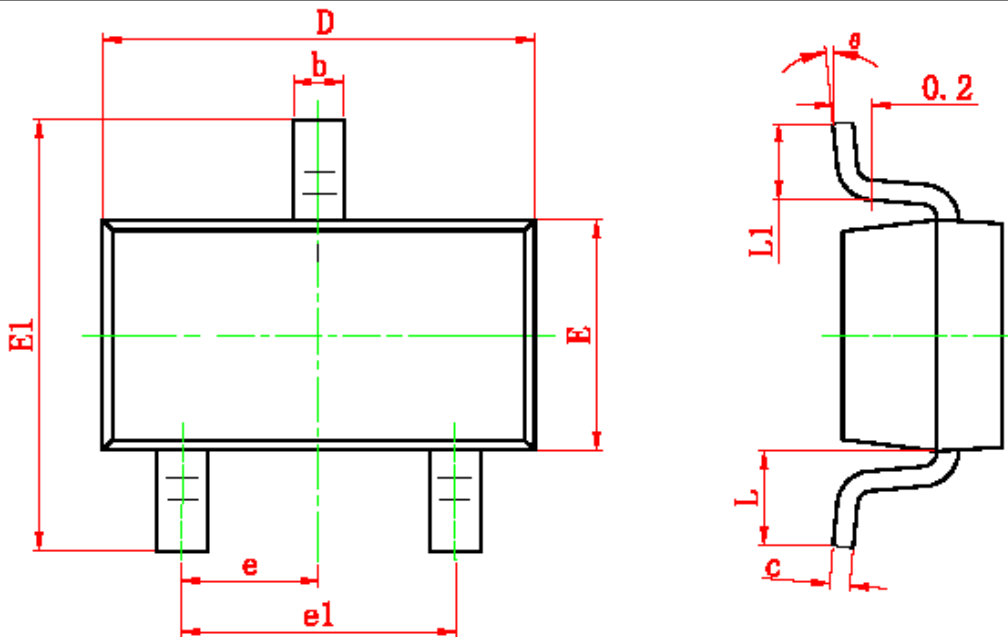

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.820	1.200	0.0323	0.0430
A1	0.000	0.100	0.0000	0.0040
A2	0.820	1.100	0.0323	0.0390
b	0.300	0.500	0.0120	0.0200
c	0.080	0.150	0.0030	0.0060
D	2.800	3.000	0.1100	0.1180
E	1.200	1.400	0.0470	0.0550
E1	2.200	2.550	0.0866	0.1000
e	0.95 TYP		0.037 TYP	
e1	1.800	2.000	0.0710	0.0790
L	0.529 REF		0.0208 REF	
L1	0.200	0.500	0.0079	0.0200
Ø	0?	8?	0?	8?



SPN2N7002K

N-Channel Enhancement Mode MOSFET

Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties which may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

© The SYNC Power logo is a registered trademark of SYNC Power Corporation

© 2004 SYNC Power Corporation – Printed in Taiwan – All Rights Reserved

SYNC Power Corporation

7F-2, No.3-1, Park Street

NanKang District (NKSP), Taipei, Taiwan, 115, R.O.C

Phone: 886-2-2655-8178

Fax: 886-2-2655-8468

© <http://www.syncpower.com>