


SAW Bandpass Filter F6222



Features

- High attenuation
- 3dB bandwidth 800kHz
- 50Ω single-ended operation
- Ceramic Surface Mounted Device (SMD) Package (3.8 mm * 3.8 mm)
- RoHS Compliant

Package Dimension – SMD 3.8 × 3.8

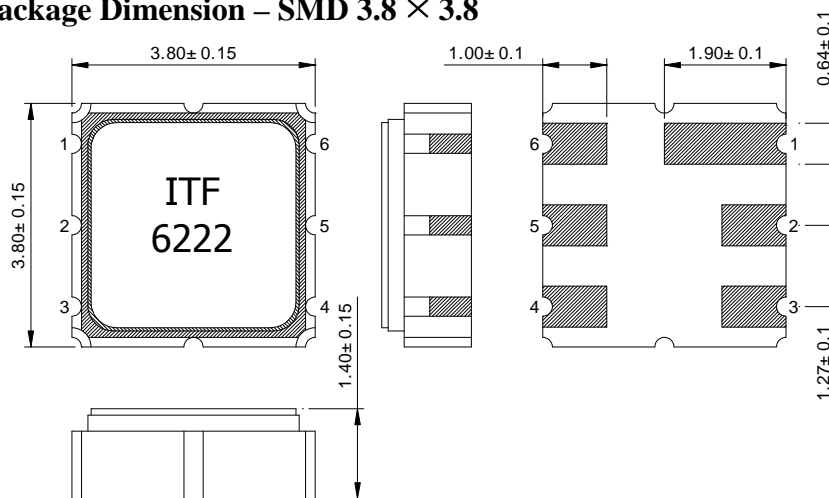

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated


Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um
Ni Plating

Pin Configuration	
2	Input
5	Output
1, 3, 4, 6	Case ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	℃	-35	25	85
Storage Temperature Range	℃	-45	25	85
Power Handling Capability	dBm	-	-	10

Electrostatics Sensitive Device (ESD)

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F6222	
		Rev. Date	2012-08-22	
		Rev.	NSNH01-AS01	1/7

SAW Bandpass Filter F6222




Specifications

Fc = 622.08 MHz

	Minimum	Typical	Maximum	Unit
Center Frequency (Fc)	621.90	622.08	622.26	MHz
3dB Band Width	600	800	1200	kHz
Insertion Loss (At Fc)	-	3.5	6.0	dB
Relative Attenuation				
At Fc - 4MHz	20	25	-	dB
At Fc + 20MHz	20	25	-	
Input/Output Impedance		50		Ohms

Notes :

- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F6222	
		Rev. Date	2012-08-22	
		Rev.	NSNH01-AS01	2/7

SAW Bandpass Filter F6222



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

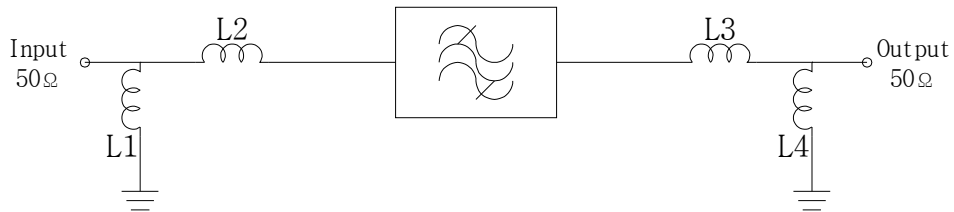

L1=10nH , L2=22nH

L3=18nH , L4=8.2nH

Marking Configuration


ITF ¹⁾

6222 ²⁾

1) Manufacturer name

2) Marking Number


* Ink or Laser Marking available

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F6222	
		Rev. Date	2012-08-22	
		Rev.	NSNH01-AS01	3/7

SAW Bandpass Filter F6222



Typical Performance (at 25°C)

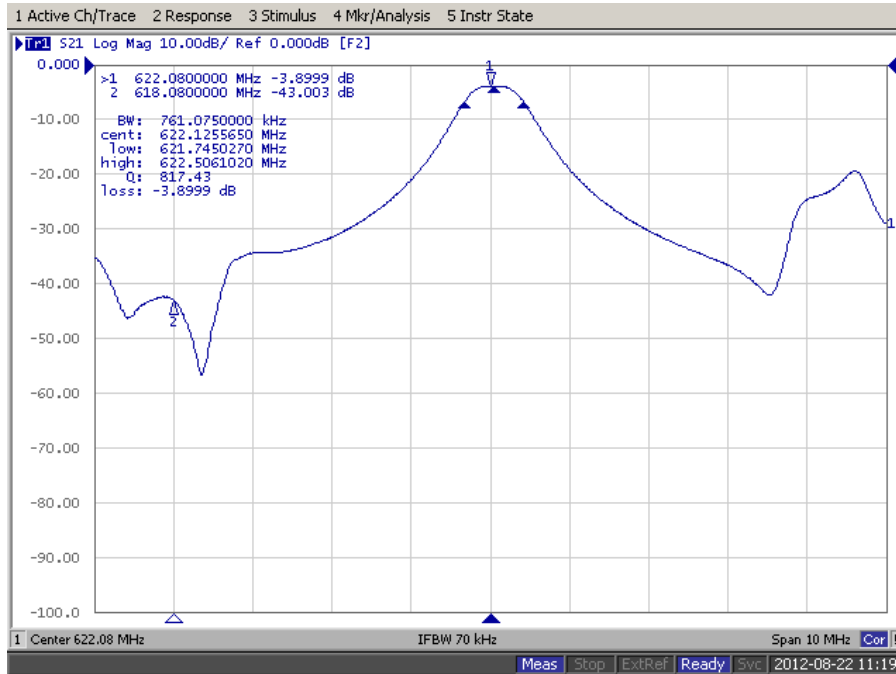

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.

F6222

Rev. Date

2012-08-22

Rev.


NSNH01-AS01

4/7



SAW Bandpass Filter F6222



Input / Output VSWR Charts

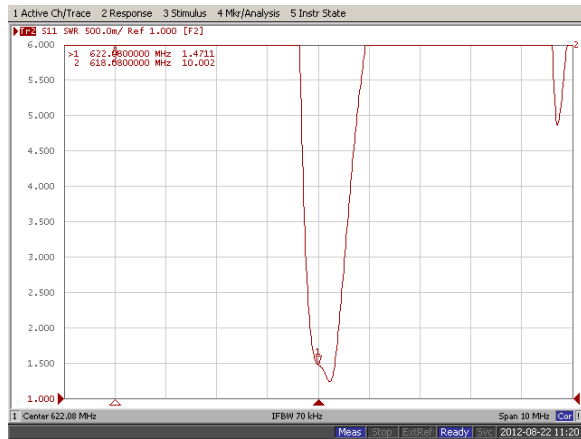

Input / Output Smith Charts

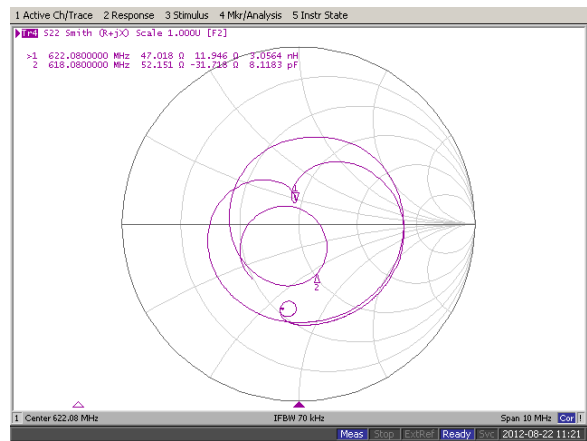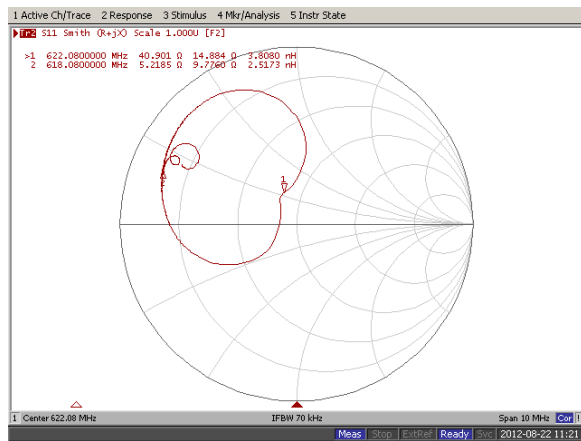

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809


Part No.	F6222	
Rev. Date	2012-08-22	
Rev.	NSNH01-AS01	5/7

SAW Bandpass Filter F6222




Packing Specification

1. Reeling Quantity : 3000 pcs / 13" reel (or 1000 pcs / 7" reel)
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

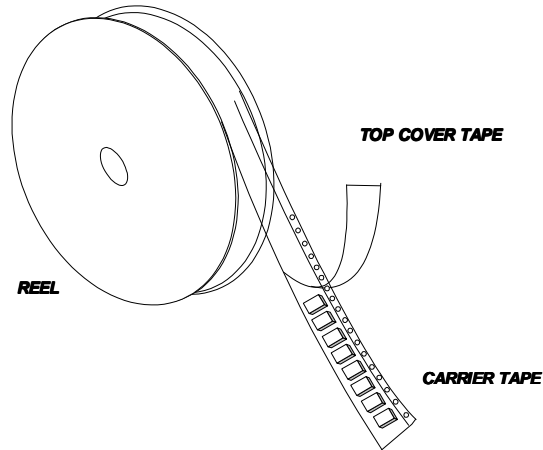

Tape Specification

1. Leader part and vacant position specification

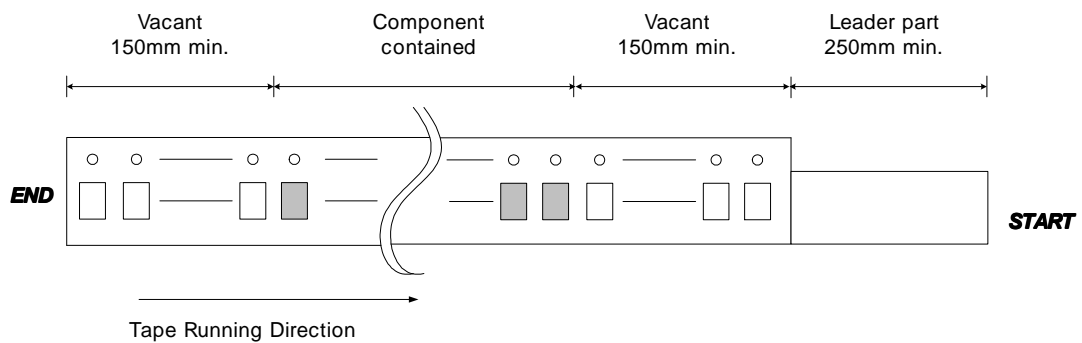


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion

- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

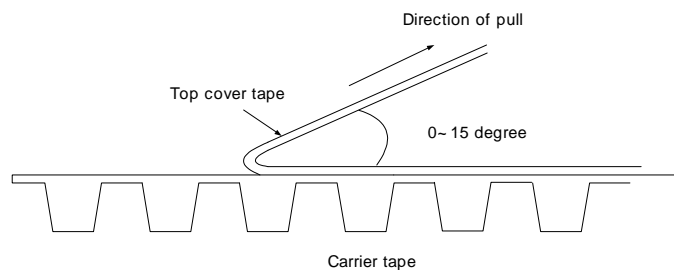


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	F6222	
		Rev. Date	2012-08-22	
		Rev.	NSNH01-AS01	6/7

SAW Bandpass Filter F6222




Carrier Tape Dimensions [unit : mm]

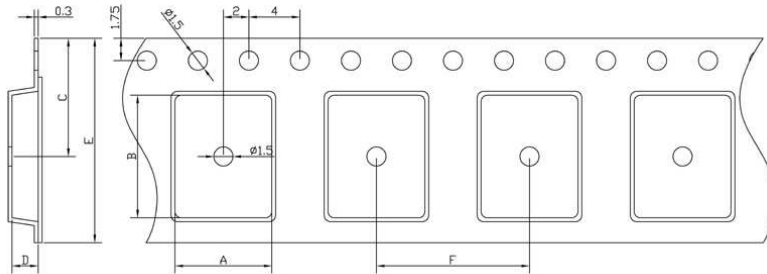


A	4.30 ± 0.1
B	4.30 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

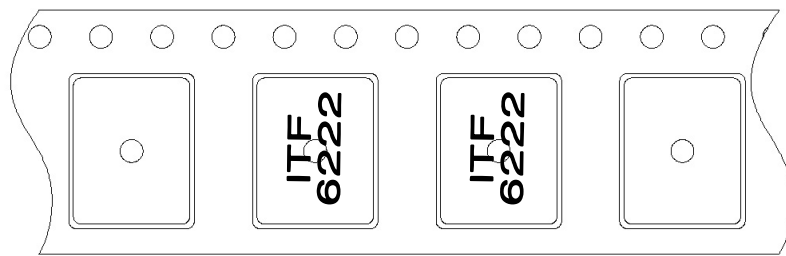

Tape Running Direction

Reel Dimensions [unit : mm]

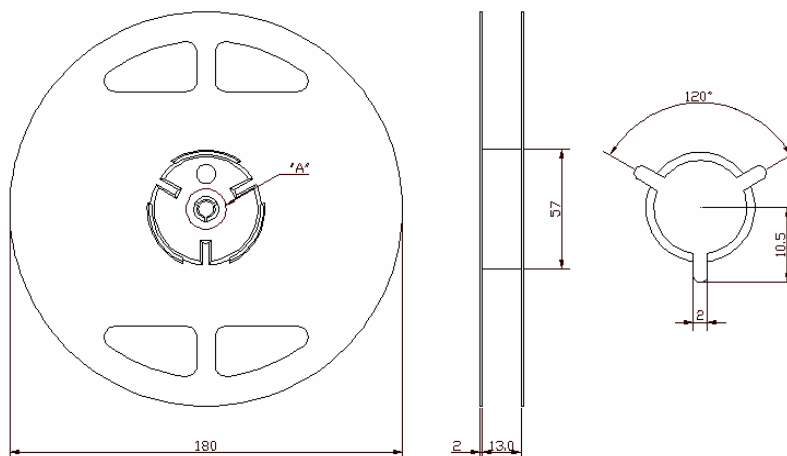

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	F6222	
Rev. Date	2012-08-22	
Rev.	NSNH01-AS01	7/7