



Bestückungsplan / contact layout

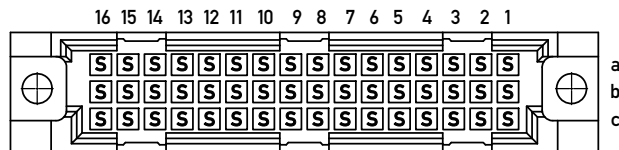

Leiterplatten-Lochbild / PCB drillhole pattern

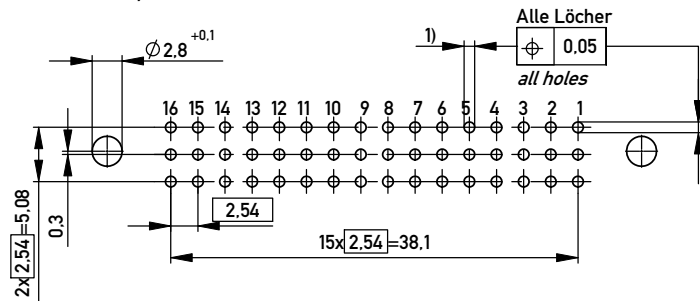

Elastische Einpresszone mit Übergabesteckzone / compliant pressfit zone with mating transfer zone
 Isolierwerkstoff / housing material : PBT GF 30
 Bauart 4 / type 4
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles
 Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
 Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 / Nr. 6
 diameter of drilled hole see drawing 164062 / No. 6

- 1) $\text{Ø}1.0^{+0.09}_{-0.06}$ Durchmesser des metallisierten Loches
- $\text{Ø}1.0^{+0.09}_{-0.06}$ Diameter of finished plated-through hole

Bedruckung siehe Zeichnung 294905
 Marking see drawing 294905

Copyright by ERNI GmbH.
 Proprietary notice pursuant to ISO 16016 to be observed.

Information:		Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		All Dimensions in mm		Designation	
Subject to modification without prior notice. Drawing will not be updated.				Messerleiste R / 2, 48 EE Male Con. R/2, 48 Pressfit	
www.ERNI.com		354397		I	
-	10.03.2009	Date		A3	
Index		Date		Class	
				STVR/2	