
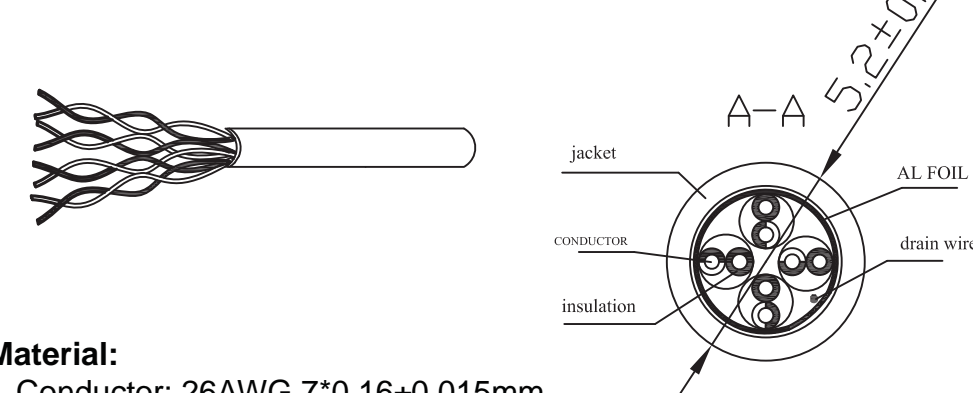



1 2 3 4 5 6 7

A $L \pm 3\%$ A

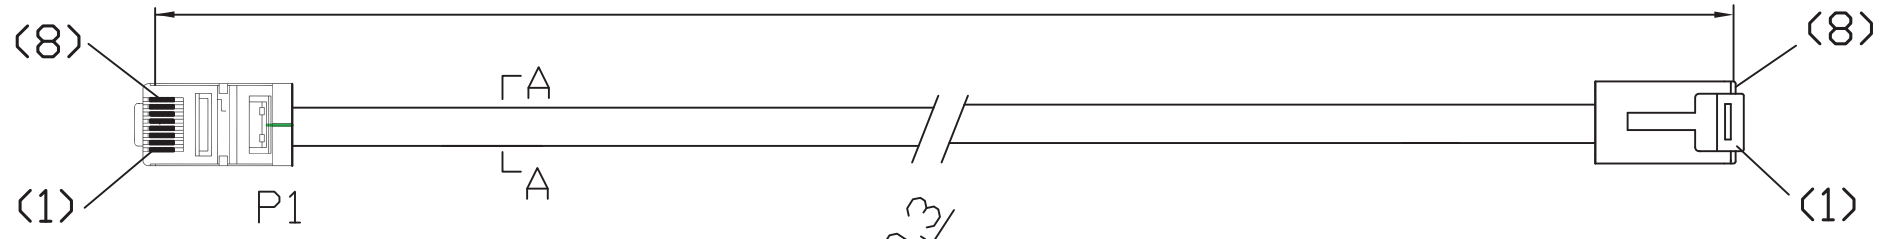

PIN OUT

P1	WIRE COLOR	P2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8

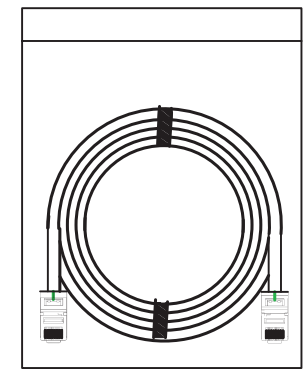

Material:

- Conductor: 26AWG 7*0.16±0.015mm
- Conductor Insulation color coding: (1)White/Orange, (1)Orange, (1)White/Green, (1)Green, (1)Blue, (1)White/Blue, (1)White/Brown, (1)Brown
- Cable Jacket printing: *CM (UL) C(UL) 4P 26AWG FTP CAT.5E PATCH CABLE ISO/IEC & EN & ANSI/TIA-568-C.2*
- Cable Assembly: White cable tie, Wiring T568B color, Plug RJ45 8P8C 50μ" pc UL 94V-2
- Cable Jacket color: Red, Yellow, Green or Blue
- Length: $L \pm 3\%$ m
- Dielectric strength: 2.5KV dc-2seconds
- Working temperatures: -20°C~60°C

Order Code: A-MCSP-80xxx/x-AP-R
 Order lengths in meter: 0.5, 1, 2, 3, 5
 Order color: Red, Yellow, Green, Blue

G	Scale					Date	Name	Title Cat5e FTP Patch cable Assembly type, 26AWG, colored	
	TOLERANCE					Drawn	18.02.13		Wilson
	X.	±X				Approved	18.02.13		Groll
	X.X	±X							
	X.XX	±X							
H	Unit: mm							ASSMANN WSW-No. A-MCSP-80xxx/x-AP-R	
		DIM	TOL					Drawing-No.	
		X.°	±X°						rev00
		X.X°	±X°	⊙	Drawn	18.02.13	Wilson		Sheet
		Angle	TOL	Id.	Modification	Date	Name	Replace	1/1



1 2 3 4 5 6 7