




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			D2	REVISED PER ECO-12-022400	28DEC12	HMR	MB












MATERIAL:  
 HOUSING: THERMOPLASTIC, UL94V-2.  
 TERMINALS: BRASS, BRIGHT TIN PLATE.  
 SCREWS: 6-32, STEEL, PLATED ZINC W/ CLEAR CHROMATE COATING. UNLESS OTHERWISE SPECIFIED.  
 RECOMMENDED TIGHTENING TORQUE: 12 IN-LBS


ELECTRICAL:  
 MAXIMUM CURRENT: 20A.  
 OPERATING VOLTAGE: 300V.  
 WIRE RANGE: 12-22 AWG.

ENVIRONMENTAL:  
 OPERATING TEMP.: -60°C TO 105°C

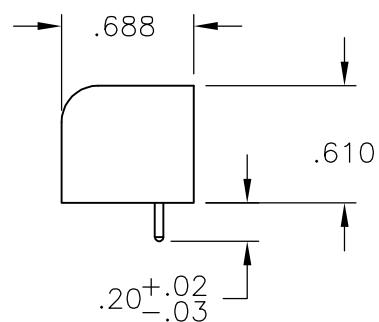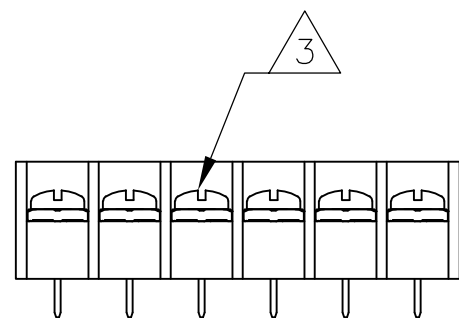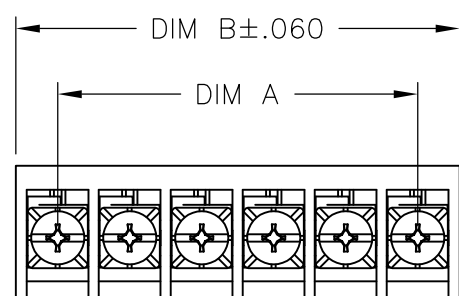-  WHITE MARKING AS SHOWN.
-  SCREWS BOTTOMED TO 3-5 IN-LBS
-  ALL SCREWS BOTTOMED, TORQUE 2 TO 4 IN-LBS




OBSOLETE	Notes	DIM B	DIM A	NO. OF POS.	CATALOG NUMBER	PART NUMBER
		7.561	7.125	20	RSB6VP201202	<del>2-1437408-6</del>
		7.186	6.750	19	RSB6VP191202	<del>2-1437408-4</del>
		6.811	6.375	18	RSB6VP181202	<del>2-1437408-1</del>
		6.061	5.625	16	RSB6VP16120222N1760	<del>2-1437417-5</del>
		6.061	5.625	16	RSB6VP16120222N60	<del>1-1437408-9</del>
		6.061	5.625	16	RSB6VP16120221N2060	<del>1-796609-6</del>
		6.061	5.625	16	RSB6VP1620221N60	<del>1-1437408-7</del>
		6.061	5.625	16	RSB6VP161202	<del>1-1437408-6</del>
OBSOLETE		5.311	4.875	14	RSB6VP141202	<del>1-1437408-2</del>
OBSOLETE		4.936	4.500	13	RSB6VP131202	<del>1-1437408-0</del>
OBSOLETE		4.561	4.125	12	RSB6VP121202	<del>1-1437408-8</del>
OBSOLETE		4.186	3.750	11	RSB6VP111202	<del>1-1437408-7</del>
		3.811	3.375	10	RSB6VP101202	<del>1-1437408-1</del>
		3.436	3.000	9	RSB6VP09120222N60	<del>9-1437407-6</del>
		3.436	3.000	9	RSB6VP09120221N60	<del>9-1437407-5</del>
OBSOLETE		3.436	3.000	9	RSB6VP091202	<del>9-1437407-4</del>
OBSOLETE		3.061	2.625	8	RSB6VP081202	<del>8-1437407-8</del>
		2.686	2.250	7	RSB6VP071902	<del>8-1437407-7</del>
OBSOLETE		2.686	2.250	7	RSB6VP071202	<del>8-1437407-6</del>
OBSOLETE		2.311	1.875	6	RSB6VP061202	<del>7-1437407-9</del>
OBSOLETE		1.936	1.500	5	RSB6VP05120221AA	<del>7-796933-1</del>
OBSOLETE		1.936	1.500	5	RSB6VP051202	<del>7-1437407-4</del>
		1.561	1.125	4	RSB6VP041202	<del>7-1437407-0</del>
		1.186	.750	3	RSB6VP03120211	<del>1-1986391-3</del>
OBSOLETE		1.186	.750	3	RSB6VP031202	<del>6-1437407-3</del>
		.811	.375	2	RSB6VP08120222N1960	<del>5-1437407-9</del>
		.811	.375	2	RSB6VP021202N60	<del>6-1437407-0</del>
		.811	.375	2	RSB6VP021202	<del>5-1437407-8</del>


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 02OCT2008	 TE Connectivity													
DIMENSIONS: INCHES		CHK S MACE 10/2/08														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S MACE 10/2/08	NAME													
<table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± .02</td></tr> <tr><td>3 PLC</td><td>± .010</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± 2'</td></tr> </table>		0 PLC	± -	1 PLC	± -	2 PLC	± .02	3 PLC	± .010	4 PLC	± -	ANGLES	± 2'	PRODUCT SPEC	RSB6 ASSEMBLY	
0 PLC	± -															
1 PLC	± -															
2 PLC	± .02															
3 PLC	± .010															
4 PLC	± -															
ANGLES	± 2'															
MATERIAL		APPLICATION SPEC	SIZE	CAGE CODE												
FINISH		WEIGHT	A3	00779												
		DRAWING NO		RESTRICTED TO												
		C-5-1437407-8														
CUSTOMER DRAWING		SCALE	SHEET	REV												
		1:1	1 OF 2	D2												

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

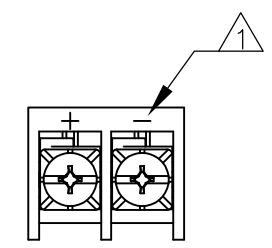


5-1437407-9

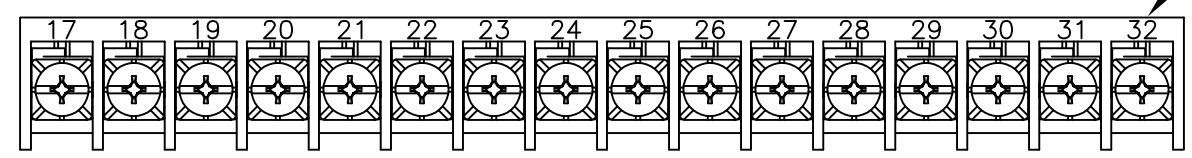


1-796609-6

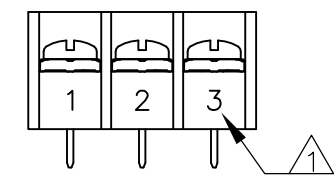


1986391-3

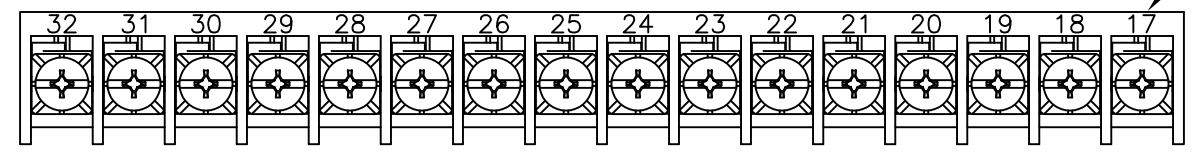


2-1437417-5

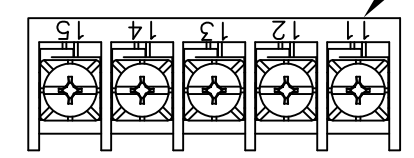


796933-1

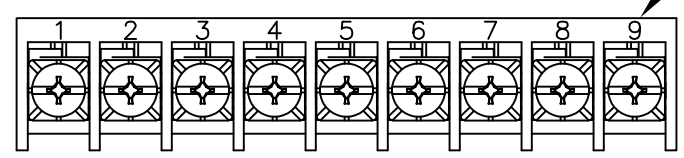


9-1437407-5

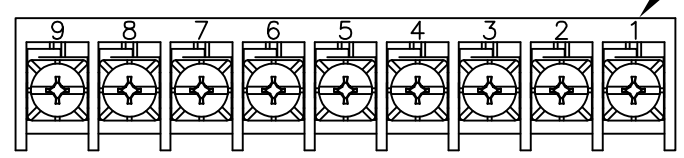

9-1437407-6

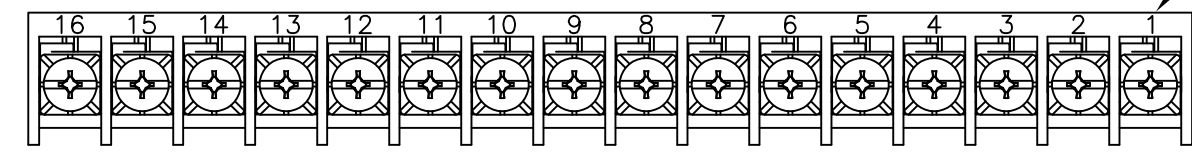

1-1437408-9

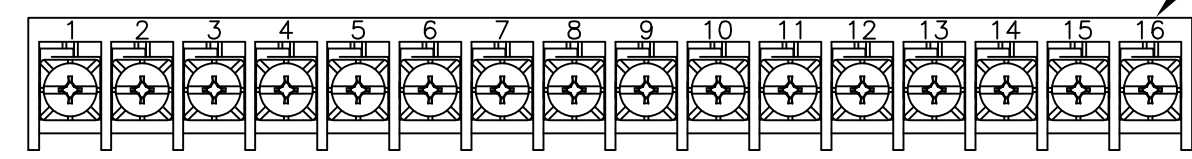

1-1437408-7

OBSOLETE	9.061	8.625	24	RSB6VP241202	<del>3-1437408-2</del>
	8.686	8.250	23	RSB6VP231202	<del>3-1437408-1</del>
	8.311	7.875	22	RSB6VP221202	<del>2-1437408-8</del>
	7.936	7.500	21	RSB6VP211202	<del>2-1437408-7</del>
DIM B	DIM A	NO. OF POS.	CATALOG NUMBER	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± -
	1 PLC ± -
	2 PLC ± .02
	3 PLC ± .010
	4 PLC ± -
	ANGLES ± 2'
MATERIAL	FINISH
-	-

DWN S SCHLEGEL 10/2/08	02OCT2008			
CHK S MACE 10/2/08	APVD S MACE 10/2/08			
PRODUCT SPEC	NAME			
APPLICATION SPEC	RSB6 ASSEMBLY			
WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
-	A3	00779	C-5-1437407-8	-
CUSTOMER DRAWING			SCALE 1:1	SHEET 2 OF 2
			REV D2	

