



Applications	Automotive Grade	2500000
Feature	AEC-Q200 AEC-Q200 Multilayer Shield Magnetic Shield Ferrite Core	T
Series	MLZ	
Status	Production	

	Size
Length(L)	2.00mm ±0.20mm
Width(W)	1.25mm ±0.20mm
Thickness(T)	1.25mm ±0.20mm
Recommended Land Pattern (A)	0.80mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	1.20mm Nom.

Electrical Characteristics			
Inductance	6.8µH ±20% at 2MHz		
Rated Current (L Change) [Typ.]			
Rated Current (L Change) [Max.]	160mA (50% Down)		
Rated Current (Temperature Rise) [Typ.]	400mA (20°C Rise)		
Rated Current (Temperature Rise) [Max.]	160mA (20°C Rise)		
DC Resistance [Typ.]	400mΩ		
DC Resistance [Max.]	520mΩ		
Self Resonant Frequency [Min.]			
Self Resonant Frequency [Typ.]			
Q [Min.]			
Q [Typ.]			

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
	Flow	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	Yes	
Packing	Blister (Plastic)Taping [180mm Reel]	
Package Quantity	2000pcs	
Weight are for reference only and show exemplary products.	0.014g	


This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.



MLZ2012M6R8WTD25




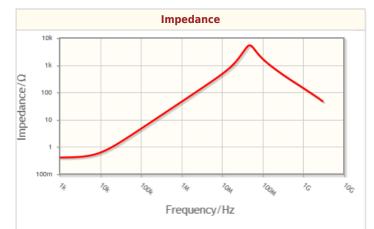


Rac 10k 1k 100 Rac/Ω 10 1 100m 'n 74 104 1. Co2 74 IQ4 'a_ 'n Frequency/Hz


MLZ2012M6R8WTD25

MLZ2012M6R8WTD25

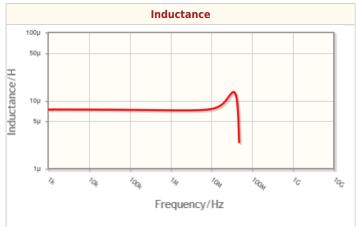

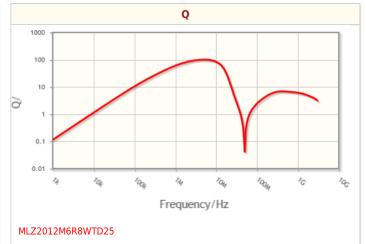

MLZ2012M6R8WTD25

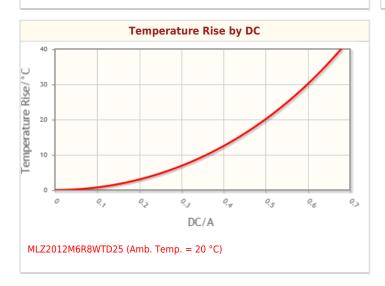

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.


! All specifications are subject to change without notice.



MLZ2012M6R8WTD25



Associated Images

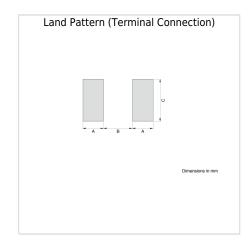

! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.