

CABLE ASSEMBLIES

- Colour coded wires
- Fully screened
- Other lengths, colours available
- Custom logos available

MINI DIN. MOULDED LEADS




SPECIFICATION

Wire Type	28AWG
Voltage	AC500V min (for 1 minute)
Insulation Resistance	1000M Ω min
Current Rating	1A
Working Temperature	-55°C to +105°C

Pin	Colour	Pin	Colour
1	Black	6	Blue
2	White	7	Green
3	Red	8	Brown
4	Yellow	9	Orange
5	Purple		

OUTLINE DRAWING

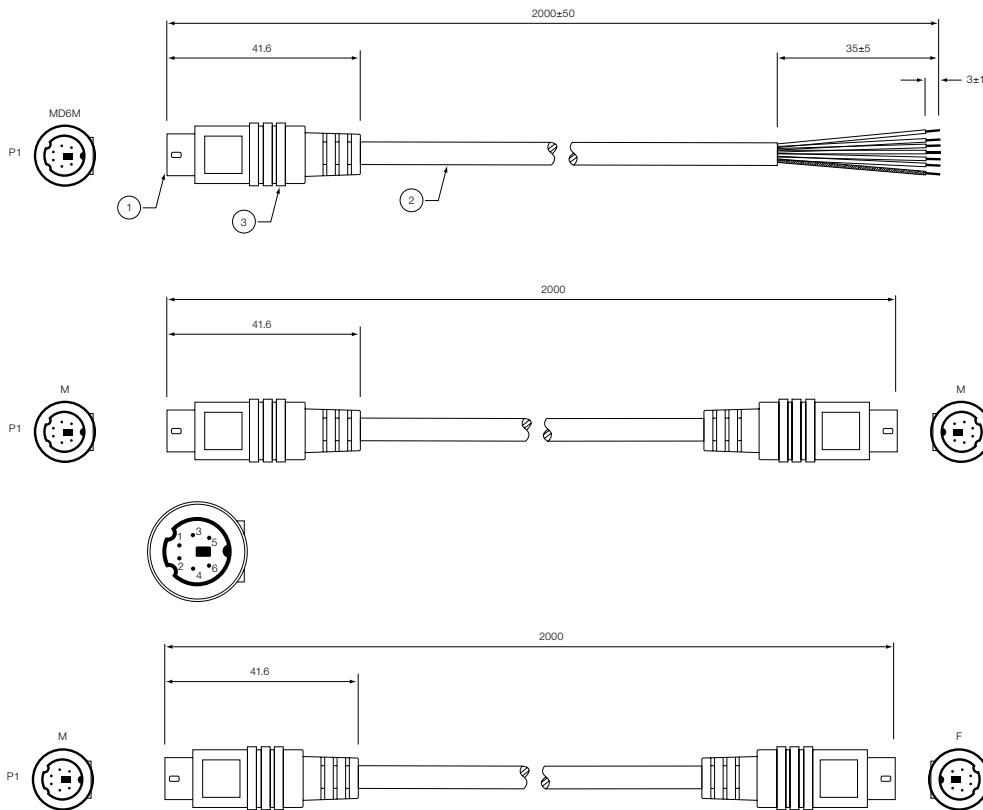

ORDERING INFORMATION

DBC	MDL	3	PFE	2M
Dubilier Connectors	Mini Din Leads	No. of Ways	Lead Style	Cable Length
		3 = 3 Ways	PFE = Plug to Free End	2M = 2 metres
		4 = 4 Ways	PS = Plug to Socket	
		5 = 5 Ways	PP = Plug to Plug	
		6 = 6 Ways		
		7 = 7 Ways		
		8 = 8 Ways		
		9 = 9 Ways		