

isc N-Channel Mosfet Transistor


FIR4N65F

• FEATURES

- Drain Current – $I_D = 4A$ @ $T_C=25^\circ C$
- Drain Source Voltage-
 - : $V_{DSS} = 650V$ (Min)
- Static Drain-Source On-Resistance
 - : $R_{DS(on)} = 3.0 \Omega$ (Max)
- Avalanche Energy Specified
- Fast Switching
- Simple Drive Requirements

• DESCRIPTION

- Designed for high efficiency switch mode power supply.

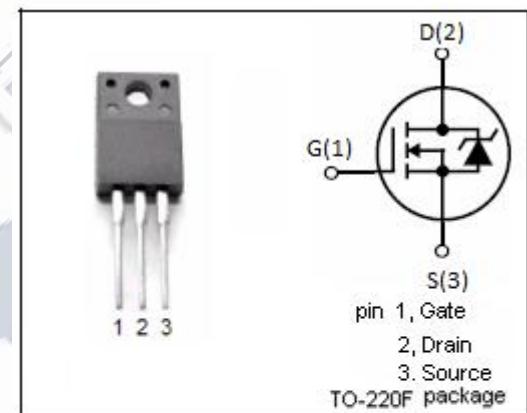


• ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	650	V
V_{GS}	Gate-Source Voltage-Continuous	± 30	V
I_D	Drain Current-Continuous	4	A
I_{DM}	Drain Current-Single Plused	16	A
P_D	Total Dissipation @ $T_C=25^\circ C$	106	W
T_j	Max. Operating Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55~150	°C

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	1.18	°C/W
$R_{th j-a}$	Thermal Resistance, Junction to Ambient	62.5	°C/W

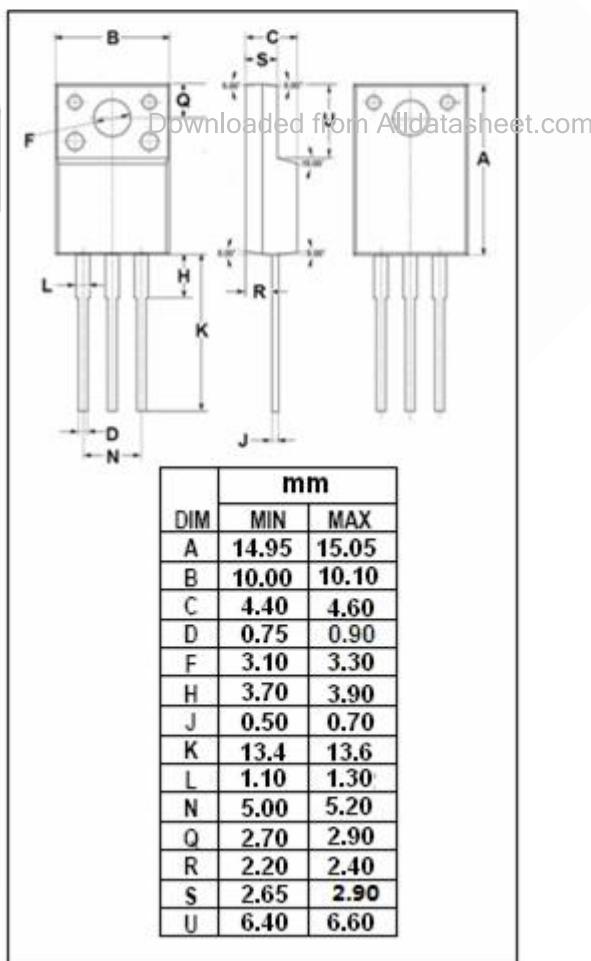

isc N-Channel Mosfet Transistor**FIR4N65F****ELECTRICAL CHARACTERISTICS** $T_c=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{(\text{BR})\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}= 0$; $I_D= 0.25\text{mA}$	650		V
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}= V_{\text{GS}}$; $I_D= 0.25\text{mA}$	2	4	V
$R_{\text{DS}(\text{on})}$	Drain-Source On-Resistance	$V_{\text{GS}}= 10\text{V}$; $I_D= 2\text{A}$		3.0	Ω
I_{GSS}	Gate-Body Leakage Current	$V_{\text{GS}}= \pm 30\text{V}$; $V_{\text{DS}}= 0$		± 100	nA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{\text{DS}}= 650\text{V}$; $V_{\text{GS}}= 0$		10	μA
V_{SD}	Forward On-Voltage	$I_S= 4\text{A}$; $V_{\text{GS}}= 0$		1.4	V

Downloaded from Alldatasheet.com