




SC35A THRU SC35M 35A, 50V TO 1200V SOZA CELL

FEATURES

- High current capability
- . Low forward voltage drop
- . Low leakage current
- .High surge current capability

MECHANICAL DATA

Small copper: $\varnothing 0.258(6.55) \times 0.0394(1.0)$ Thick
 Large copper: $\varnothing 0.284(7.22) \times 0.0295(0.75)$ Thick
 Outline information: $\varnothing 0.284(7.22) \times 0.0866(2.2)$ Thick

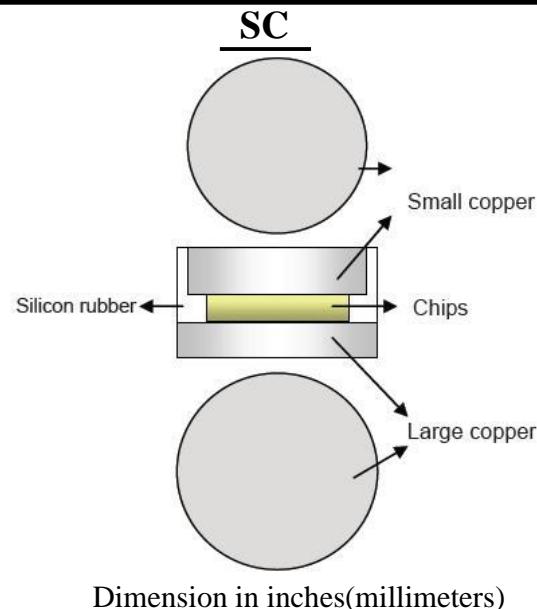**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C Ambient temp. Unless otherwise specified. Single phase, half sine wave, 60HZ, resistive or inductive load.

For capacitive load, derate current by 20%

	SYMBOL L	SC							UNITS
		35A	35B	35D	35G	35J	35K	35M	
Maximum Current Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	Volts
T _L =100°C Maximum Average Forward Rectified Current	I(AV)	35							Amps
Peak Forward Surge Current 8.3ms Single Sine-wave on Rated Load (JEDEC Method)	IFSM	400							Amps
Maximum Instantaneous Forward Voltage Drop at 35A DC	VF	1.0							Volts
Maximum DC Reverse Current T _A =25°C at Rated DC Blocking Voltage T _A =125°C	IR	5 250							uA
Typical Junction Capacitance (NOTE 1)	CJ	300							pF
Operating AND Storage Temperature Range	TSTG/ TJ	-55 to +150							°C

NOTE: 1.Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.

RATING AND CHARACTERISTIC CURVES SC35A THRU SC35M

FIG. 1 –MAXIMUM AVERAGE FORWARD CURRENT DERATING

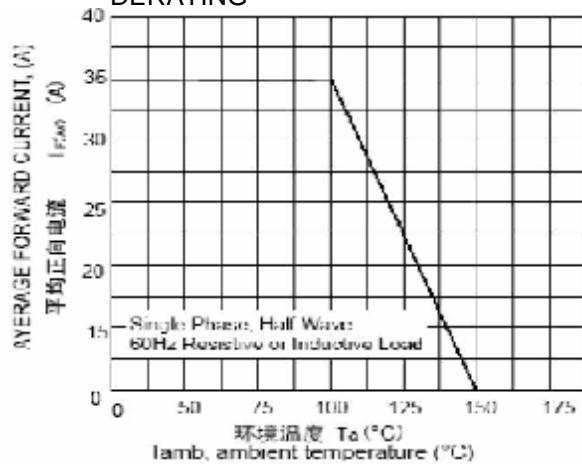


FIG. 2 –MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

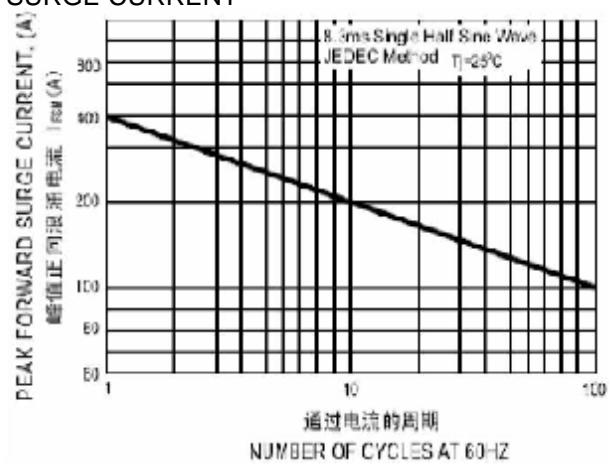


FIG. 3 – TYPICAL REVERSE CHARACTERISTICS

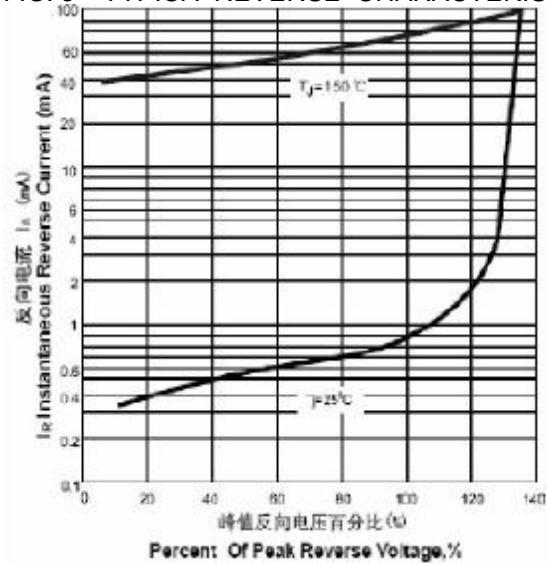


FIG.4 – TYPICAL FORWARD CHARACTERISTICS

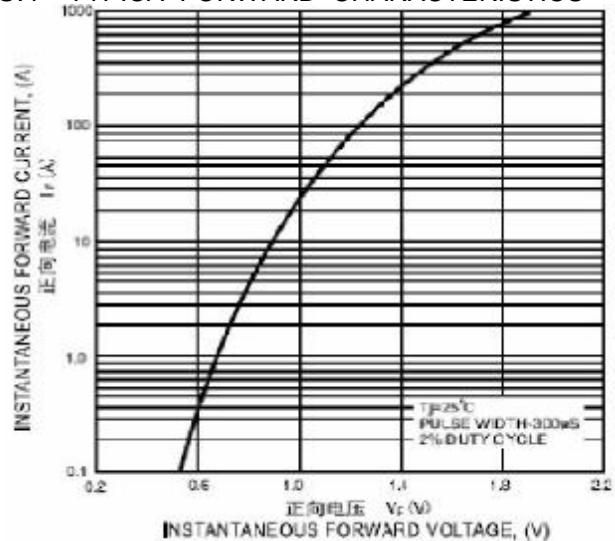


FIG.5–TYPICAL JUNCTION CAPACITANCE

