

**SAW Filter 480MHz**

**Model: TA0555A**

**Part No: MA08609**

**REV NO.: 1**

**A. MAXIMUM RATING:**


1. Input Power Level: 10 dBm
2. DC Voltage : 3V
3. Operating Temperature: -40°C to +65°C
4. Storage Temperature: -40°C to +85°C

**B. ELECTRICAL CHARACTERISTICS:**

Characteristics	Specification			Note
	Min.	Typ.	Max.	
Center frequency <b>F<sub>c</sub></b> MHz	-	480	-	-
Insertion loss 476~484MHz <b>I.L.</b> dB	-	1.9	3.1	-
Ripple 476~484MHz dB	-	0.4	1.5	-
Group Delay Ripple 476~484MHz ns	-	30	70	
Attenuation: ( Reference level from 0 dB )				
350 ~ 430 MHz dB	40	57	-	-
430 ~ 457 MHz dB	35	53	-	-
505 ~ 515 MHz dB	30	50	-	-
515 ~ 535 MHz dB	35	56	-	-
535 ~ 580 MHz dB	40	57	-	-
Temperature coefficient of frequency ppm/°C	-	-37	-	
Source Impedance <b>Z<sub>s</sub></b> Ω		50		1
Load Impedance <b>Z<sub>L</sub></b> Ω		50		1

Note1. No matching network required for operation at 50 Ω

**C. MEASUREMENT CIRCUIT:**


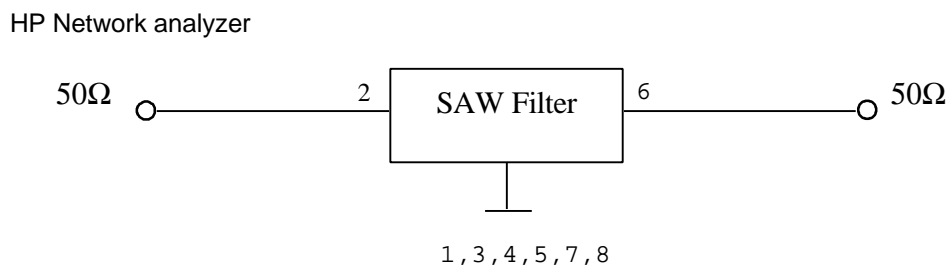




**SAW Filter 480MHz**  
**Part No: MA08609**

**Model: TA0555A**  
**REV NO.: 1**

**F. FREQUENCY CHARACTERISTICS :**

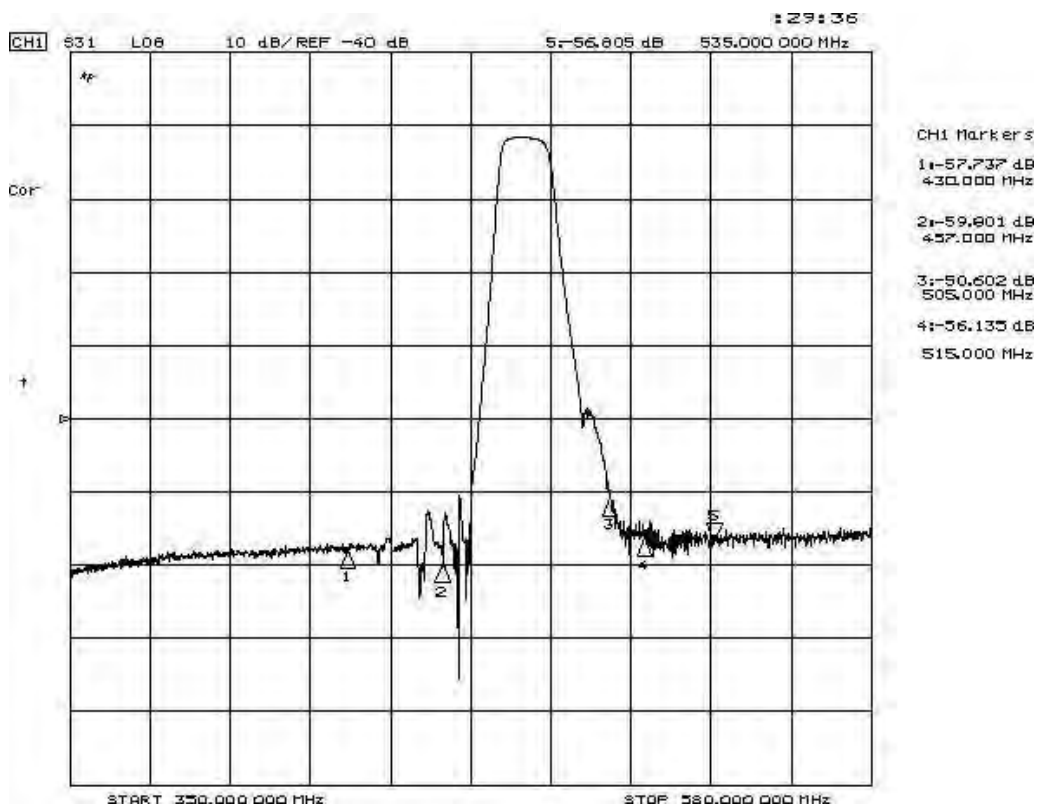
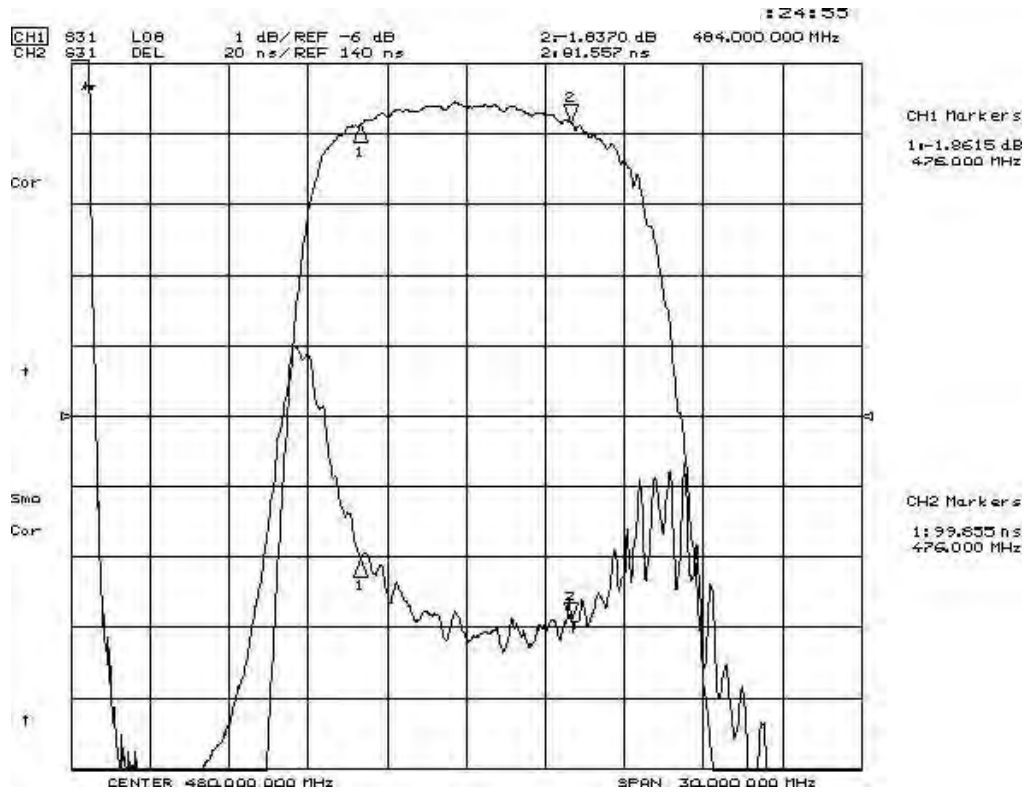


**SAW Filter 480MHz**  
**Part No: MA08609**



**Model: TA0555A**  
**REV NO.: 1**

**Reflections Functions :**

**S11 VSWR**

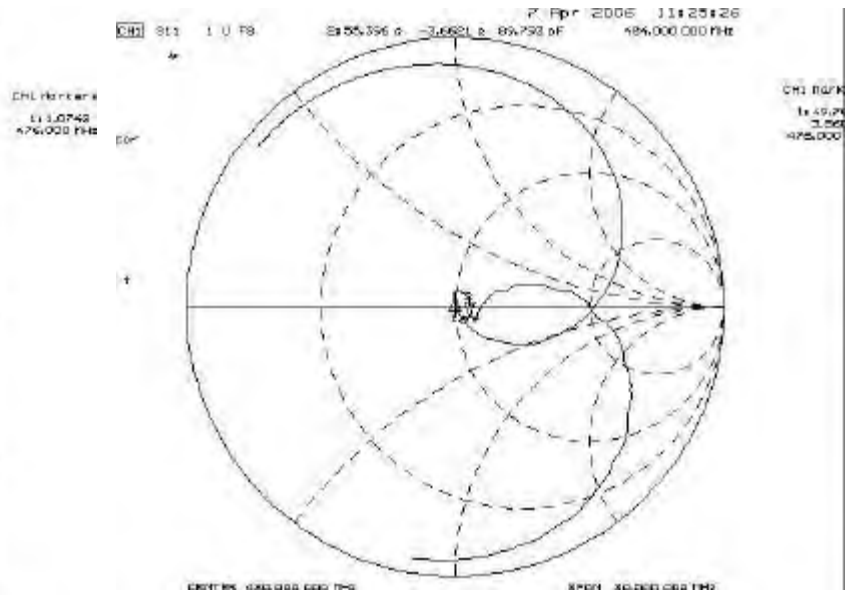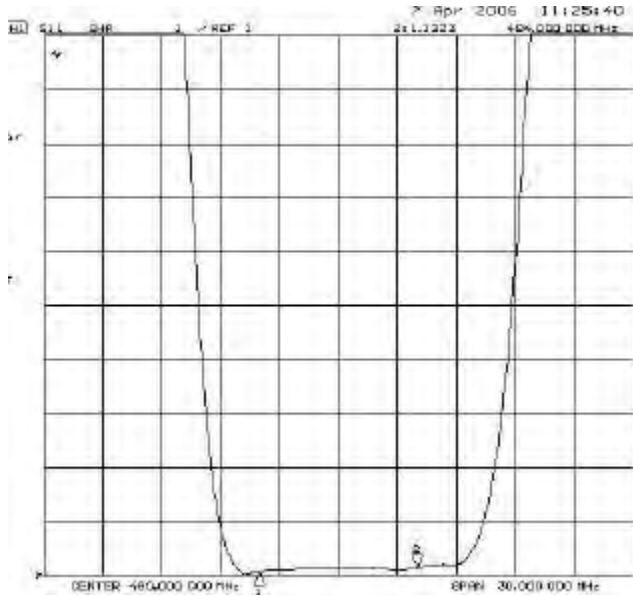

**S22 VSWR**

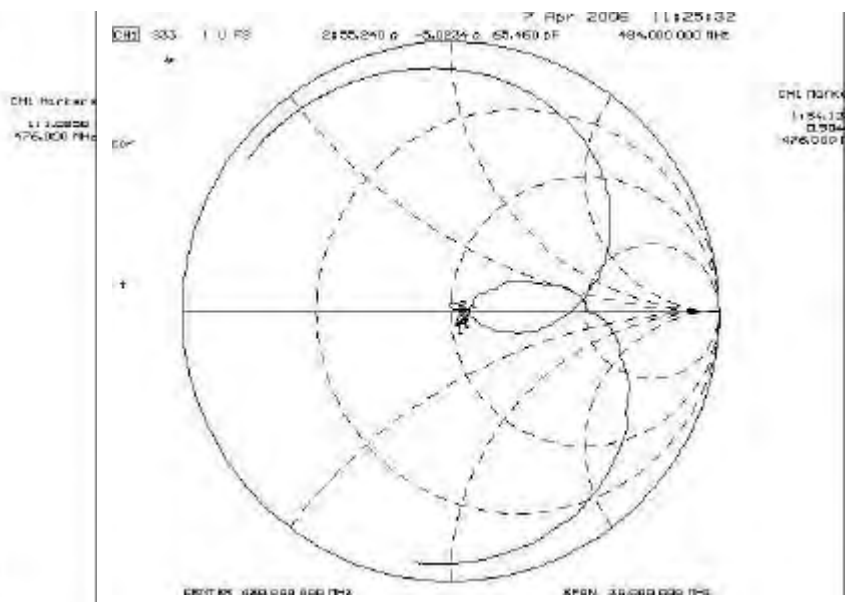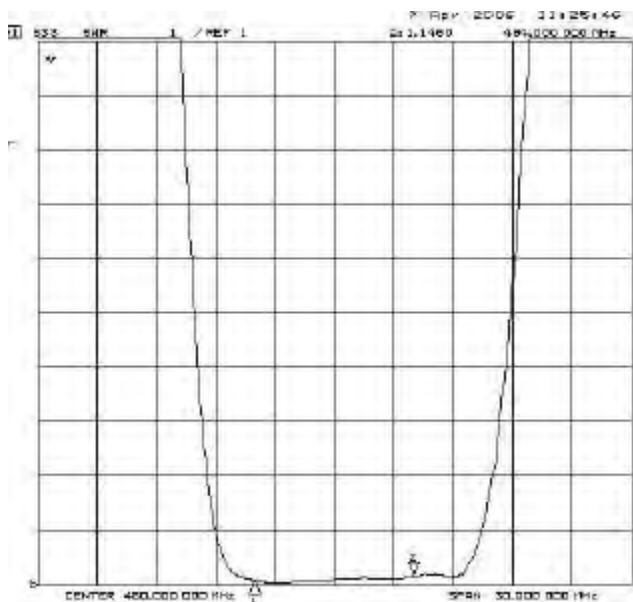

**SAW Filter 480MHz**

**Model: TA0555A**


**Part No: MA08609**

**REV NO.: 1**


**G. PACKING:**

**1. REEL DIMENSION**

**(Reel Count : 7"=1,000 ; 13"=3,000 )**

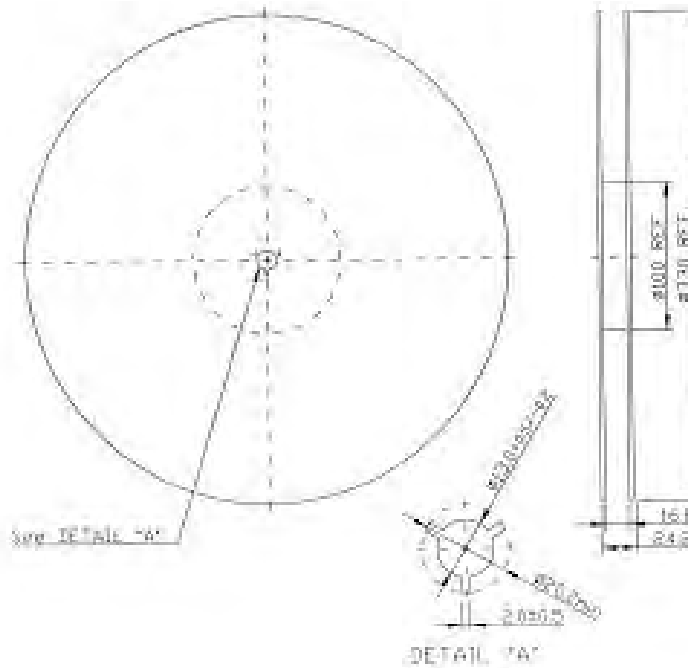

**2.TAPE DIMENSION**

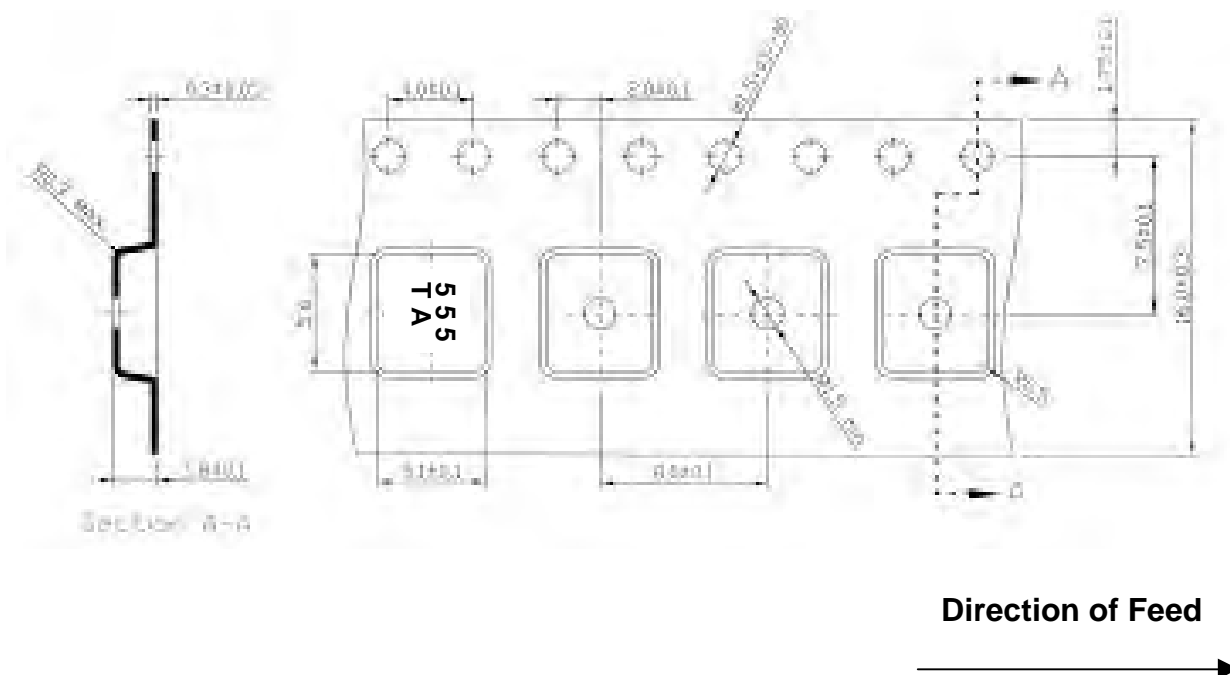

**SAW Filter 480MHz**

**Model: TA0555A**

**Part No: MA08609**

**REV NO.: 1**

**H. RECOMMENDED REFLOW PROFILE :**

