# Photonic Multichannel Spectral Analyzer Model: PMA-11




The PMA-11 is a spectral analyzer that integrates a spectrograph and high performance multi-channel photodetector in a single compact chassis. Light collection is simplified through the use of optical fiber. The diffraction grating of the spectrograph and multi-channel photodetector are rigidly fixed, resulting in excellent wavelength reproducibility. The wavelength axis and spectral response characteristics are calibrated at the factory, so that spectral measurements can be carried out easily and accurately.

The PMA-11 series offers four different multi-channel photo-detectors to choose from, for additional flexibility in grating selection, allowing the user to optimize the performance for the application at hand.

Equipped with a standard SCSI interface, the PMA-11 is easily connected to any type of computer for data collection and analysis.

- Compact Integration of a Spectrograph and Multichannel Photodetector
- High Sensitivity
- Easy Measurement Using Optical Fiber Input



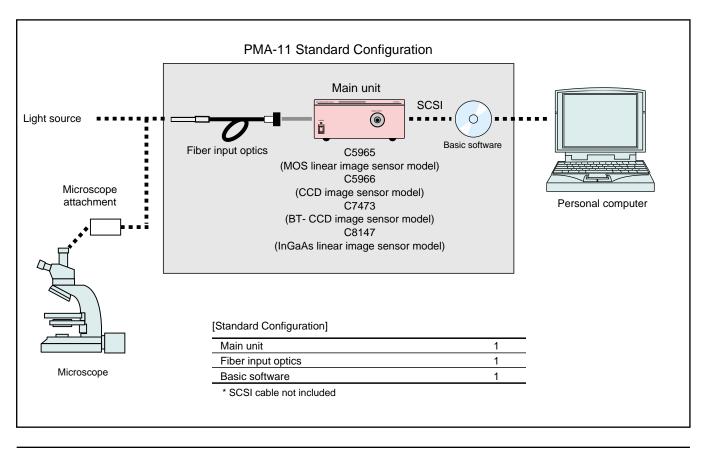

# A compact unit containing a multi-channel photo-detector, and power supply all in one. Optical fiber input makes spectral measurements easier than ever.

## **FEATURES**

#### Measurements of the spectrum are easier and more accurate than ever before

The spectrum can now be easily measured by light collection through an optical fiber. The wavelength axis and spectral response characteristics are calibrated at the factory, so that spectral measurements can be carried out easily and accurately.

#### Superb cost perfomance model : C5965

The C5965 uses a MOS linear image sensor realises high performance and

#### High sensitivity model : C5966

The C5699 uses the CCD leaner image sensor has sensitivity a hundred times better than the C5965 model.

#### Ultra-high sensitivity model : C7473-36

The C7473-36 consists the thermoelectric-cooling type BT-CCD image sensors, which have a high quantum efficiency and a compact Czerny-Turner type spectrograph. The simultaneous measurement of the wavelength from an ultraviolet to a near-infrared region with high wavelength resolution and high sensitivity is realised.

#### Near infrared model : C8147-34, C8147-38

The C8147 realises a simultaneous and high-resolution measurement of absorption or reflection spectra in a near infrared wavelength region with a wide dynamic range and a low noise.

#### High efficiency optics

Adoption of a Ø1mm bundle fiber and a bright spectrograph detects a measured light efficiently.

#### Compact design

High performance is built in a small case. This completely new design ensures that the PMA-11 will fit anywhere.

#### External synchronisation can be used

Measurements can now be carried out synchronised to external trigger signals, allowing measurement of pulse phenomena.

Standard SCSI interface allows connection to computer

## **APPLICATIONS**


#### [ Scientific applications ]

- UV to visible spectroscopy
- Fluorescence spectroscopy
- Raman scattering
- Chemiluminescence analysis
- Liquid chromatography
- Gas chromatography
- ICP emission analysis
- Discharge emission analysis
- Combustion analysis
- Micro spectroscopy


#### [ Industrial applications ]

- Water quality testing
- UV-ray monitors
- Evaluation of light sources
  Plasma monitors
- Chromaticity measurements
  Fruit tester
- Impurities testing
- Plastic sorting
- Thin film thickness monitors
  Color filter testing


# MEASUREMENT EXAMPLES

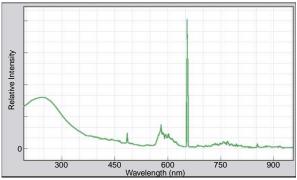


①Luminescence spectrum of a deuterium lamp

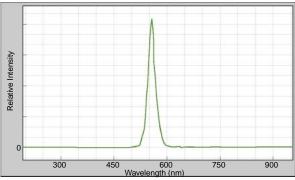


3 Luminescence spectrum of an LED

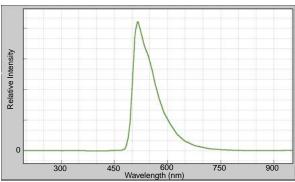


⑤Fluorescence spectrum of fluorosein

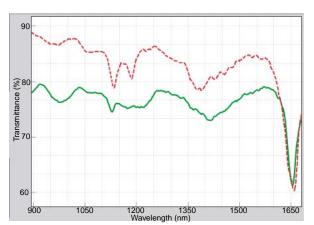


(7) Transmittance spectra in near infrared reagion Dotted line: Compact disc Solid line: PET botle

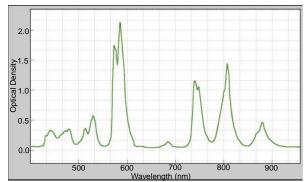


②Absorption spectrum of a didymium filter

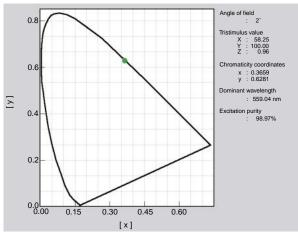

(4) Chromaticity coordinates of an LED

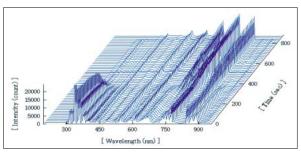

63-d display of plasma emission spectra

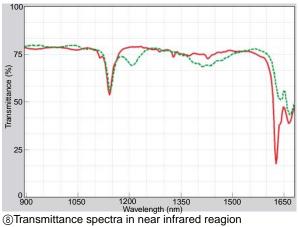

Dotted line : Styren monomer

Solid line : Polystyren

# SPECIFICATIONS

#### Main unit

| Type No.  | C5965-31   | C5966-3x   | C7473-36                             | C8147-34                              | C8147-38   |
|---|--|--|--------------------------------------|---------------------------------------|--|
| Photodetector                                   | MOS linear image sensor  | CCD linear image sensor  | BT- CCD linear image sensor          | InGaAs linear image sensor            |  |
| No. of photosensitive device channels           | 1024 ch  | 1024 ch  | 1024 ch                              | 256 ch                                |  |
| Channel size                                    | 25 $\mu$ m(H) $\times$ 2.5 mm (V) 24 $\mu$ m (H) $\times$ 3.07 mm(V) |  | 24 μm(H) × 2.928 mm(V)               | 50 μm(H) × 250 μm (V)                 |  |
| Cooling temepareture                            | non-cooling  | 0°C  | -15°C                                | 0°C                                   | -10°C  |
| Read-out noise                                  | 10 000 electrons   | 60 electrons   | 10 electrons                         | 12,500 electrons                      |  |
| Dark current                                    | 12,500 electrons/scan ( at 25°C; 20ms )                              | 512 electrons/scan( at 0°C; 20ms )                                   | 75 electrons/scan ( at -15°C; 20ms ) | 20,000 electrons/scan ( at 0°C; 5ms ) | 2.5 × 10 <sup>7</sup> electrons/scan ( at -10°C; 5ms ) |
| A/D resolution                                  | 16bit  |  |                                      |                                       |  |
| Spectrograph F number                           | 3  |  | 4                                    |                                       |  |
| Spectrograph type                               | Concave spherical grating type                                       |  | Czerny-Turner type                   |                                       |  |
| Simultaneous measurement wavelength range       | 300 nm to 800nm  | x=1 300 nm to 800 nm<br>x=2 200 nm to 400 nm<br>x=3 600 nm to 1000nm | 200 nm to 950 nm                     | 900 nm to 1650 nm                     | 1600 nm to 2350 nm                                     |
| Wavelength resolution *                         | < 3 nm(FWHM)   | x=1 < 3 nm(FWHM)<br>x=2 < 1.5 nm(FWHM)<br>x=3 < 2.5 nm(FWHM)         | < 2 nm(FWHM)                         | < 9 nm(FWHM)                          | < 9 nm(FWHM)   |
| Effective Light-receiving area of optical fiber | φ1mm   |  |                                      |                                       |  |
| Optical fiber length                            | 1.5m   |  |                                      |                                       |  |
| Exposure time                                   |  | 20ms to 32s  |                                      | 5 ms to 32 s                          | 5 ms to 50 ms (typ.)                                   |
| External trigger input                          | TTL level / High impedance   |  |                                      |                                       |  |
| Interface                                       | SCSI   |  |                                      |                                       |  |
| Line voltage                                    | AC100V to 240V ±10%, 50, 60Hz  |  |                                      |                                       |  |


<sup>\*</sup>Tested by the bright-line spectrum of Hg-Ar lamp (at 312.57nm, 435.84nm, 546.07nm, 696.54nm, 1013.98nm)

#### Basic software


| Measurement<br>functions                  | Spectral measurement  Reflection spectra measurement  Absorption spectra measurement  Color measurement                          |  |  |
|---|--|--|--|
| Temporal resolution measurement functions | Temporal fluctuation of spectra over time  Temporal fluctuation of reflection factor and transmittance over time                 |  |  |
| Data acquisition condition setting        | Exposure time  Memory integration count times  Temporal fluctuation measurement  |  |  |
| Calibration and correction                | Wavelength axis  Sensitivity uniformity  Dark current  |  |  |
| Display functions                         | Spectrum (non-limited accumulation)  Temporal fluctuation of waveform over time (non-limited accumulation)  Chromaticity diagram |  |  |
| Wavelength axis display                   | • Wavelength (nm) ,Wavenumber (cm <sup>-1</sup> ),<br>Energy (eV)  |  |  |
| Brightness axis display                   | Linear, logarithm  |  |  |
| Cursor analysis<br>functions              | Wavelength (Wavenumber etc.) vs, intensity  Peak detection  FWHM between two cursors  Integrated intensity                       |  |  |
| Other analytical functions                | Smoothing  Differential waveform  Color measurement  |  |  |

### DIMENSIONAL OUTLINES (Unit :mm)


#### C5965. C5966 (approx. 4.5kg)




#### C7473 (approx. 5kg)



#### C8147 (approx. 7.5kg)



#### Fiber input optics (approx.100g)



- ★ Product and software package names noted in this documentation are trademarks or registered trademarks of their respective manufacturers.
- Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office.
- Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions.
  Specifications and external appearance are subject to change without notice.

© 2001Hamamatsu Photonics K.K.

# HAMAMATSU

#### Homepage Address http://www.hamamatsu.com

Created in Japan (PDF)

HAMAMATSU PHOTONICS K.K., Systems Division

812 Joko-cho, Hamamatsu City, 431-3196, Japan, Telephone: (81)53-431-0124, Fax: (81)53-435-1574, E-mail:export@sys.hpk.co.jp