TOSHIBA Bi-CMOS Digital Integrated Circuit Silicon Monolithic

TD74BC574P,TD74BC574F

Octal D-Type Flip-Flop with 3-State Outputs (Non-Inverted)


The TD74BC574P/TD74BC574F is a high-speed 8-bit flip-flop fabricated with silicon gate Bi-CMOS technology. It achieves the high-speed operation equivalent to the FAST family while maintaining the Bi-CMOS low-power dissipation. The TD74BC574P/F is a non-inverting flip-flop. Each bit is individually controlled by a clock input (CK) and an output enable input (\overline{OE}). When the \overline{OE} input is high, all eight outputs are in the high-impedance state, which facilitates the interface with bus lines.

All inputs are equipped with resistors and diodes to protect against Electrostatic Discharge (ESD).

Features


- High-speed operation $\dots t_{pd} = 8.8 \text{ ns (typ.)}$
- Symmetrical output impedance IOH = −3 mA (max)
- $I_{OL} = 24 \text{ mA} \text{ (max)}$
- Low power dissipationICCD = 7 mA (typ.)
- $I_{CCZ} = 10 \ \mu A \ (typ.)$

- Pin and function compatible with FAST (74F574)




Logic Diagram

Weight DIP20-P-300-2.54A : 1.48 g (typ.) SOP20-P-300-1.27 : 0.25 g (typ.)

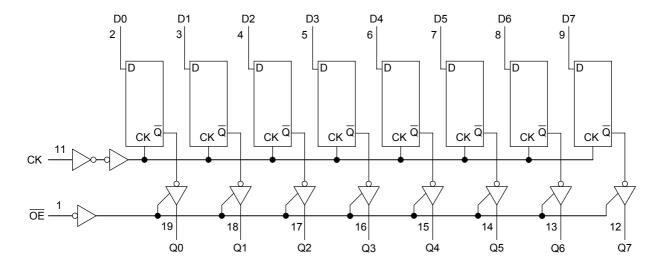


<u>TOSHIBA</u>

Input Protection Circuit and Output Equivalent Circuit



Pin Assignment (top view)



Truth Table


	Outputs		
ŌĒ	СК	D	Q
Н	Х	Х	Z
L		Х	Qn
L		L	L
L		Н	н

X: Don't care

Z: High impedance

Qn: No change

Logic Symbol



Absolute Maximum Ratings

Characteristi	cs	Symbol	Rating	Unit
Power supply voltage		V _{CC}	–0.5 to 7.0	V
Input voltage		V _{IN}	-1.2 to V _{CC} + 0.5	V
Output voltage		VO	-0.5 to V _{CC} + 0.5	V
Input clamp diode current		I _{IK}	±30	mA
Output clamp diode curre	Output clamp diode current		-30	mA
Output current (output low state)		I _{OL}	48	mA
Power dissipation	BC574P	PD	1380 (Note 1)	mW
Power dissipation	BC574F	۳D	860 (Note 1)	IIIVV
Storage temperature		T _{stg}	–65 to 150	°C

Note 1: $Ta = 25^{\circ}C$

Recommended Operating Conditions

Characteristics		Symbol	Min	Тур.	Max	Unit	
Power supply voltage	V _{CC}	4.5	5.0	5.5	V		
Input voltage	V _{IN}	0	_	V _{CC}	V		
Output voltage		V _O	0	_	V _{CC}	V	
Output current	High level	I _{OH}	_	_	-3	mA	
Output current	Low level	I _{OL}	_	_	24	ШA	
Operating temperature		T _{opr}	-40	25	85	°C	

Electrical Characteristics

DC Characteristics (unless otherwise specified, $V_{CC} = 4.5$ V to 5.5 V, Ta = -40°C to 85°C)

Characteristics		Symbol	Test Condition	V _{CC}	Min	Typ. (Note 1)	Max	Unit
	High level	VIH	—		2.0	—	_	V
Input voltage	Low level	VIL	_		_	—	0.8	v
Input clamp voltage		VIK	I _{IK} = -18 mA	4.5		_	-1.2	V
	High level	Maria	$\begin{array}{c c} & & & & & & & & $	4.5	2.4	3.4	_	
Output voltage	nigit level	V _{OH}	I _{OH} = -3.0 mA	4.75	2.7	3.4	_	V
	Low level	V _{OL}	I _{OL} = 24 mA	4.5			0.5	
		lj	$V_{IN} = V_{CC}$	5.5		_	±1.0	
Input current (all input	pins)	IIH	V _{IN} = 2.7 V	5.5		_	±1.0	μA
	F leakage current	IIL	V _{IN} = 0.5 V or GND	5.5			±1.0	
3-state OFF leakage current		I _{OZH}	V _O = 2.7 V	5.5 —			50	μA
		I _{OZL}	$V_{O} = 0.5 V$	5.5		_	-50	μ Λ
Output short current (Note 2)		I _{OS}	V _O = GND	5.5	-60	_	-180	mA
		ICCL		5.5	_	20	27	mA
Quiescent supply curre	ent (total)	Іссн		5.5	_	10	50	
		I _{CCZ}	All outputs are in the	5.5		10	50	μA
Quiescent supply current (each bit)		ΔI_{CC1}	,	_	_		1.5	mA
		ΔI_{CC2}	One input: $V_{IN} = V_{CC} - 2.1 V$ Other inputs: V_{CC} or GND	_	_		1.5	IIIA


Note 1: Typical value is measured at V_{CC} = 5.0 V and Ta = 25° C.

Note 2: Only one output at a time should be shorted. Duration should not exceed one second.

AC Characteristics (Input $t_r = t_f = 2.5$ ns)

Characteristics		Symbol Test Condition	Ta = 25°C V _{CC} = 5.0 V			$\begin{array}{l} Ta=-40^{\circ}\\ V_{CC}=5.0 \end{array}$	Unit		
		0,		Min	Тур.	Max	Min	Max	•
Propagation delay time	CK-Q	t _{pLH}		3.0	8.8	11.5	3.0	13.0	ns
Tropagation delay time	OIV-Q	t _{pHL}		3.0	8.8	11.0	3.0	13.0	
3-state output enable time	OE -Q	t _{pZH}	- C _L = 50 pF	3.0	10.4	12.5	3.0	14.5	ns
5-State Output enable time		t _{pZL}		3.0	8.2	9.5	3.0	13.5	
3-state output disable time	OE -Q	t _{pHZ}		3.0	6.5	9.5	3.0	11.5	ns
	OL-Q	t _{pLZ}		3.0	5.8	8.5	3.0	10.0	115
Maximum clock frequency		f _{MAX}		100	_	_	70	_	MHz
Dynamic supply current		ICCD	f = 1 MHz Output open		7	12		15	mA

Note 1: When measuring t_{pLH} , t_{pHL} , t_{pZH} and t_{pHZ} , the output pin should be connected as shown in Note 2. When measuring t_{pZL} , and t_{pLZ} , the output pin should be connected as shown in Note 3.



AC Characteristics (Input $t_r = t_f = 2.5 \text{ ns}$)


Characteristics		Symbol Test Condition	Ta = 25°C V _{ÇC} = 5.0 V			Ta = -40° V _{CC} = 5.0			
		Cymbol	rest condition	Min	Тур.	Max	Min	Max	Onic
Pulse width	СК	t _{w (L)}		6			6	_	ns
	CR	t _{w (H)}		7	—	_	7	—	115
Setup time	D-CK	t _{s (L)}	$C_L = 50 \text{ pF}$	2			2		ns
		t _{s (H)}	$R_L = 500 \ \Omega$	2	—	_	2	—	115
Hold time	D-CK	t _{h (L)}]	2	_		2		ns
	D-CK	D-CK t _{h (H)}		2	—	—	2	_	115

TOSHIBA

Package Dimensions


DIP20-P-300-2.54A

Unit : mm

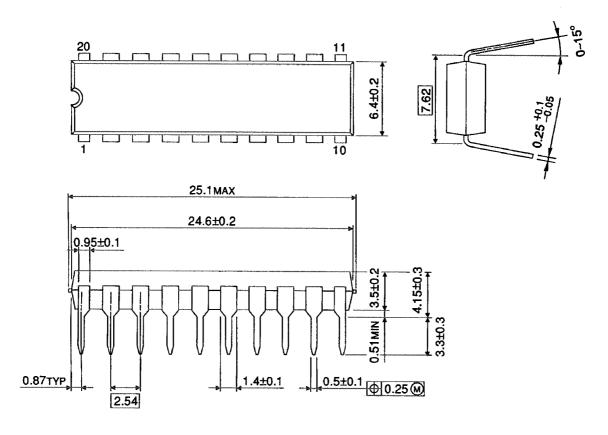


Weight: 1.48 g (typ.)

Package Dimensions



Unit : mm

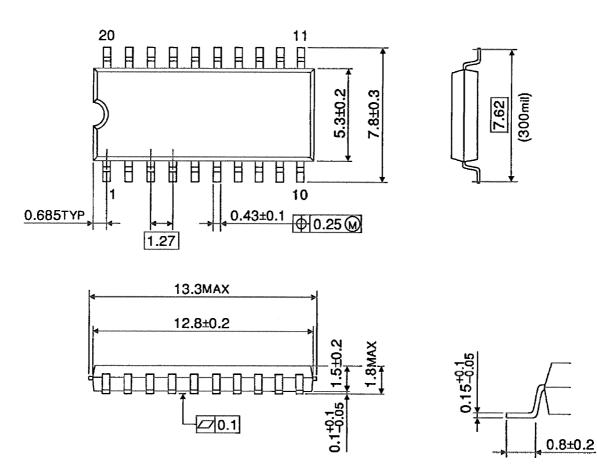

Weight: 0.25 g (typ.)

RESTRICTIONS ON PRODUCT USE

Handbook" etc..

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
 In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.