

- ◆ CMOS Schmitt Trigger Inverter
- ◆ High Speed Operation tpd=12ns TYP
- ◆ Operating Voltage Range 2V~6V
- ◆ Low Power Consumption 1 $\mu$ A MAX

### ■ Applications

- Palmtops
- Digital Equipment

### ■ General Description

The XC74UH14AAM is a CMOS Schmitt Trigger Inverter, manufactured using silicon gate CMOS fabrication.

CMOS low power circuit operation makes high speed LS-TTL operations achievable.

With a wave forming buffer connected internally, stabilized output can be achieved as the circuit offers high noise immunity.

As the XC74UH14AAM is integrated into a mini molded, SOT-25 package, high density mounting is possible.

### ■ Features


High Speed Operation: tpd=12ns TYP

Operating Voltage Range: 2V~6V

Low Power Consumption: 1 $\mu$ A MAX

Space Saving Package: SOT-25

### ■ Pin Configuration

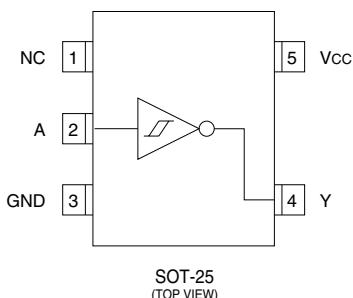

### ■ Function

INPUT	OUTPUT
A	Y
H	L
L	H

H=High level, L=Low level

### ■ Absolute Maximum Ratings

Ta=25°C

PARAMETER	SYMBOL	RATINGS	UNITS
Power Supply Voltage	Vcc	-0.5 ~ +7.0	V
Input Voltage	Vin	-0.5 ~ Vcc +0.5	V
Output Voltage	Vout	-0.5 ~ Vcc +0.5	V
Input Diode Current	Iik	$\pm 20$	mA
Output Diode Current	lok	$\pm 20$	mA
Output Current	Iout	$\pm 25$	mA
Vcc ,GND Current	Icc, Ignd	$\pm 25$	mA
Continuous Total Power Dissipation	Pd	200	mW
Storage Temperature	Tstg	-65 ~ +150	°C

Note: Voltage is all Ground standardized.

## ■ DC Electrical Characteristics


PARAMETER	SYMBOL	Vcc(V)	CONDITIONS	Ta=25°C			Ta=-40~85°C		UNITS
				MIN	TYP	MAX	MIN	MAX	
Threshold Voltage	VT+	2.0		-	-	1.5	-	1.5	V
		4.5		-	-	3.15	-	3.15	
		6.0		-	-	4.2	-	4.2	
	VT-	2.0		0.3	-	-	0.3	-	
		4.5		0.9	-	-	0.9	-	
		6.0		1.2	-	-	1.2	-	
Hysteresis Voltage	VH	2.0		0.2	-	1.2	0.2	1.2	V
		4.0		0.4	-	2.25	0.4	2.25	
		6.0		0.6	-	3.0	0.6	3.0	
Output Voltage	VOH	2.0	VIN=VIH or VIL	I <sub>OH</sub> =-20μA	1.9	2.0	-	1.9	V
		4.5		I <sub>OH</sub> =-2mA	4.4	4.5	-	4.4	
		6.0		I <sub>OH</sub> =-2.6mA	5.9	6.0	-	5.9	
		4.5		I <sub>OH</sub> =-2.6mA	4.18	4.31	-	4.13	
		6.0		I <sub>OH</sub> =-2.6mA	5.68	5.80	-	5.63	
	VOL	2.0	VIN=VIH	I <sub>OL</sub> =20μA	-	0.0	0.1	-	V
		4.5		I <sub>OL</sub> =2mA	-	0.0	0.1	-	
		6.0		I <sub>OL</sub> =2.6mA	-	0.0	0.1	-	
		4.5		I <sub>OL</sub> =2.6mA	-	0.17	0.26	-	
		6.0		I <sub>OL</sub> =2.6mA	-	0.18	0.26	-	
Input Current	I <sub>IN</sub>	6.0	VIN=VCC or GND	-	-	±0.1	-	±1.0	μA
Quiescent Supply Current	I <sub>CC</sub>	6.0	VIN=VCC or GND, I <sub>OUT</sub> =0μA	-	-	1.0	-	10.0	

## ■ Switching Electrical Characteristics


PARAMETER	SYMBOL	CONDITIONS	Ta=25°C			UNITS
			MIN	TYP	MAX	
Output Transition Time	t <sub>TLH</sub>		-	5	10	ns
	t <sub>THL</sub>		-	5	10	ns
Propagation Delay Time	t <sub>PLH</sub>		-	7	15	ns
	t <sub>PHL</sub>		-	7	15	ns

PARAMETER	SYMBOL	Vcc(V)	CONDITIONS	Ta=25°C			Ta=-40~85°C		UNITS
				MIN	TYP	MAX	MIN	MAX	
Output Transition Time	t <sub>TLH</sub>	2.0		-	50	125	-	155	ns
		4.5		-	14	25	-	31	
		6.0		-	12	21	-	26	
	t <sub>THL</sub>	2.0		-	50	125	-	155	
		4.5		-	14	25	-	31	
		6.0		-	12	21	-	26	
Propagation Delay Time	t <sub>PLH</sub>	2.0		-	48	100	-	125	ns
		4.5		-	12	20	-	25	
		6.0		-	9	17	-	21	
	t <sub>PHL</sub>	2.0		-	48	100	-	125	
		4.5		-	12	20	-	25	
		6.0		-	9	17	-	21	
Input Capacitance	C <sub>IN</sub>	-		-	5	10	-	10	pF

## ■ Waveforms

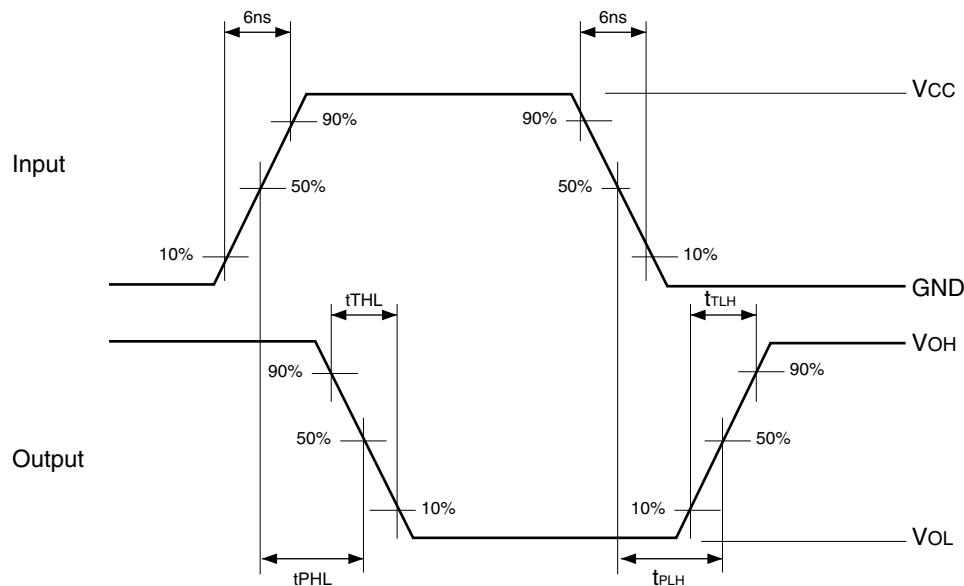

## ■ Typical Application Circuit

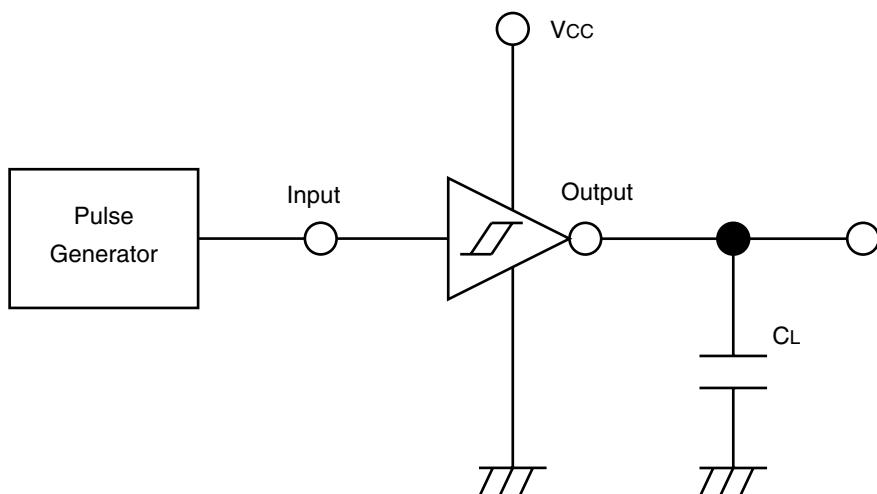

Note: open output when measuring supply current

9

## ■ Recommended Operating Conditions

PARAMETER	SYMBOL	CONDITIONS	UNITS
Supply Voltage	V <sub>CC</sub>	2 ~ 6	V
Input Voltage	V <sub>IN</sub>	0 ~ V <sub>CC</sub>	V
Output Voltage	V <sub>OUT</sub>	0 ~ V <sub>CC</sub>	V
Operating Temperature	T <sub>OPR</sub>	-40 ~ +85	°C