


120 Amp Schottky Rectifier

SBR12040 — SBR12050

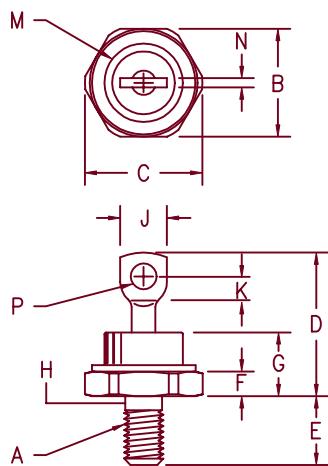

Notes:

1. Full threads within 2 1/2 threads
2. Standard Polarity: Stud is Cathode
Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	---	---	---	---	1/4-28
B	.669	.688	17.00	17.47	
C	---	.794	---	20.16	
D	.750	1.00	19.05	25.40	
E	.422	.453	10.72	11.50	
F	.115	.200	2.93	5.08	
G	---	.450	---	11.43	
H	.220	.249	5.59	6.32	1
J	---	.375	---	9.52	
K	.156	---	3.97	---	
M	---	.510	---	12.95	Dia
N	---	.080	---	2.03	
P	.140	.175	3.56	4.44	Dia

DO-203AB (D0-5)

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
SBR12040*	40V	40V	
SBR12045*	45V	45V	
SBR12050*	50V	50V	

*Add Suffix R For Reverse Polarity

- Schottky Barrier Rectifier
- 175°C Junction Temperature
- Guard Ring Protection
- Reverse Energy Tested
- V_{RRM} – 40 to 50 Volts
- 120 Amperes
- Mil-PRF19500 Equivalents Available

Electrical Characteristics

Average forward current,
Maximum surge current,
Max repetitive peak reverse current
Max peak forward voltage,
Max peak forward voltage,
Max peak reverse current
Max peak reverse current
Typical junction capacitance

I_{F(AV)}= 120 Amps
I_{FSM}= 2500 Amps
I_{R(OV)}= 2 Amps
V_{FM}= 0.55 Volts
V_{FPM}= 0.70 Volts
I_{RM}= 90 mA
I_{RPM}= 3 mA
C_J= 4900 pF

T_C = 124°C, Square wave, R_{θJC} = 0.6°C/W
8.3 ms, half sine T_J = 175°C
f = 1 KHz, 25°C, 1 μsec Square wave
I_{FM} = 120A, T_J = 175°C*
I_{FM} = 120A, T_J = 25°C*
V_{RRM}, T_J = 125°C*
V_{RRM}, T_J = 25°C
V_R = 5.0V, T_J = 25°C

*Pulse test: Pulse width 300 μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range
Operating junction temp range
Max thermal resistance
Typical thermal resistance (greased)
Mounting torque
Weight

T_{STG}
T_J
R_{θJC}
R_{θCS}

-65°C to +175°C
-65°C to +175°C
0.6°C/W Junction to sink
0.5°C/W Case to sink
25–30 inch pounds
.54 ounce (15.3 grams) typical

SBR12040

Figure 1
Typical Forward Characteristics


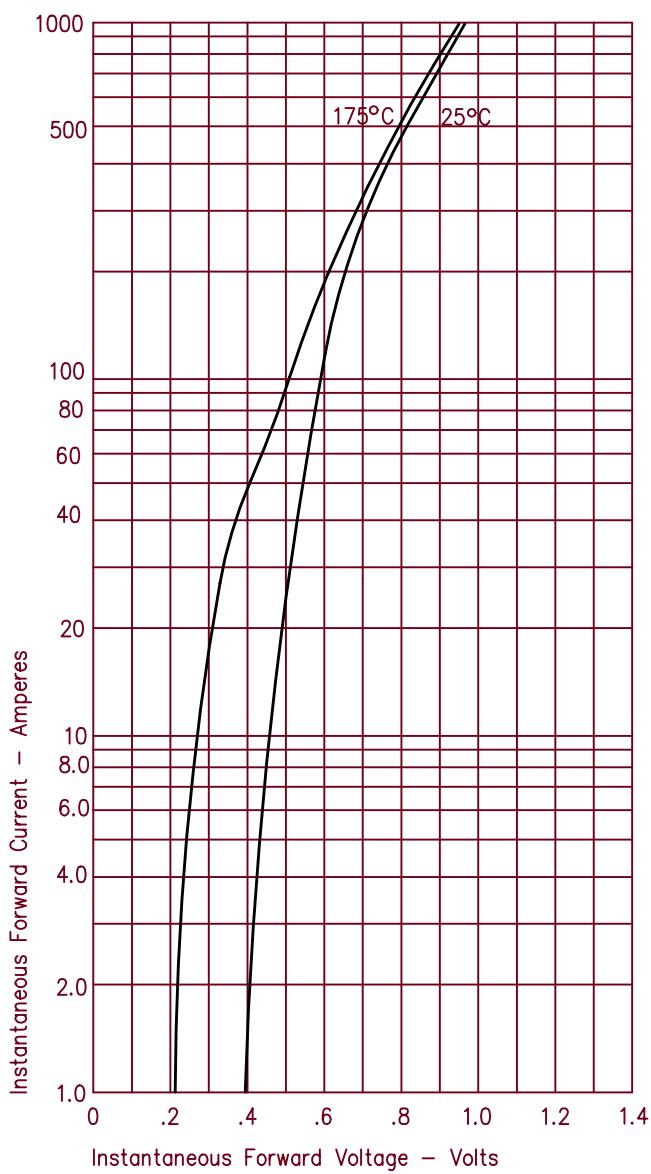


Figure 2
Typical Reverse Characteristics

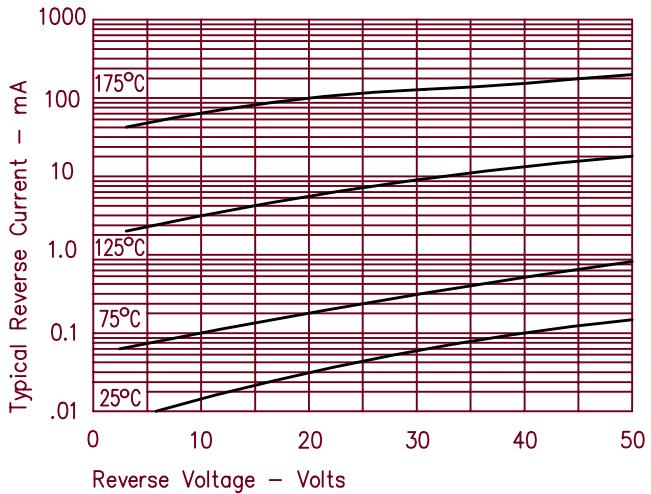

SBR12050

Figure 3
Typical Junction Capacitance

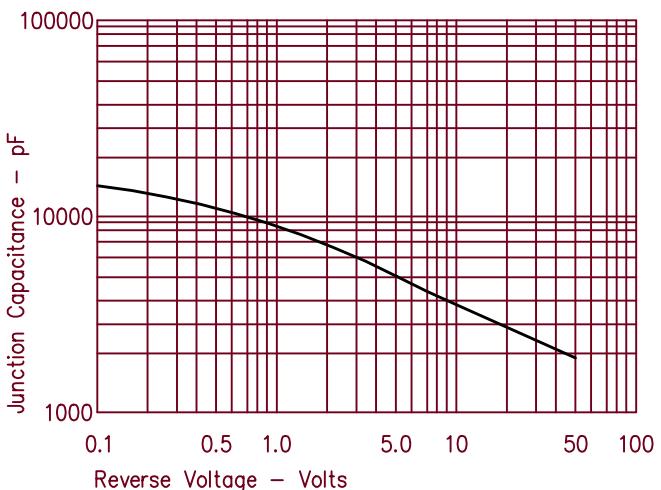


Figure 4
Forward Current Derating

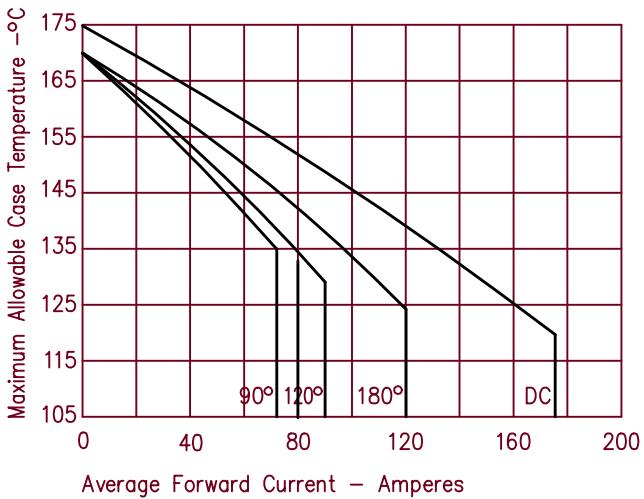


Figure 5
Maximum Forward Power Dissipation

