

## 10BASE-2 & 10BASE-T MAUs

### Mini Transceivers

VAP00105



*Bel's 10Base-2 and 10Base-T MAUs support media conversion between PCs and other peripheral devices in a networking environment.*

#### 0801-2940-18

##### 10Base-T Ethernet MAU

- MAU mini transceiver for 10Base-T Ethernet twisted pair applications
- Supports media conversion between PC workstations and other peripheral devices via the AUI port to twisted pair cabling
- MAU transceivers enable media conversion to a variety of peripheral devices such as printers, fax machines, copiers, and disk drives
- Compliant with IEEE 802.3 standards
- Fully certified to FCC Class B, CISPR Class B, UL, CSA, CE and TUV-Rheinland
- Operating temperature 0° to +70° C
- Storage temperature -20° to +100° C

#### 0801-2940-20

##### 10Base-2 Ethernet MAU

- MAU mini transceiver for 10Base-2 Ethernet thin coax applications
- Supports media conversion between PC workstations and other peripheral devices via the AUI port to thin coaxial cabling
- MAU transceivers enable media conversion to a variety of peripheral devices such as printers, fax machines, copiers, and disk drives
- Compliant with IEEE 802.3 standards
- Fully certified to FCC Class B, CISPR Class B, UL, CSA, CE and TUV-Rheinland
- Operating temperature 0° to +70° C
- Storage temperature -20° to +100° C




# 10BASE-2 & 10BASE-T MAUs Mini Transceivers


VAP00105

## MECHANICAL

0801-2940-18

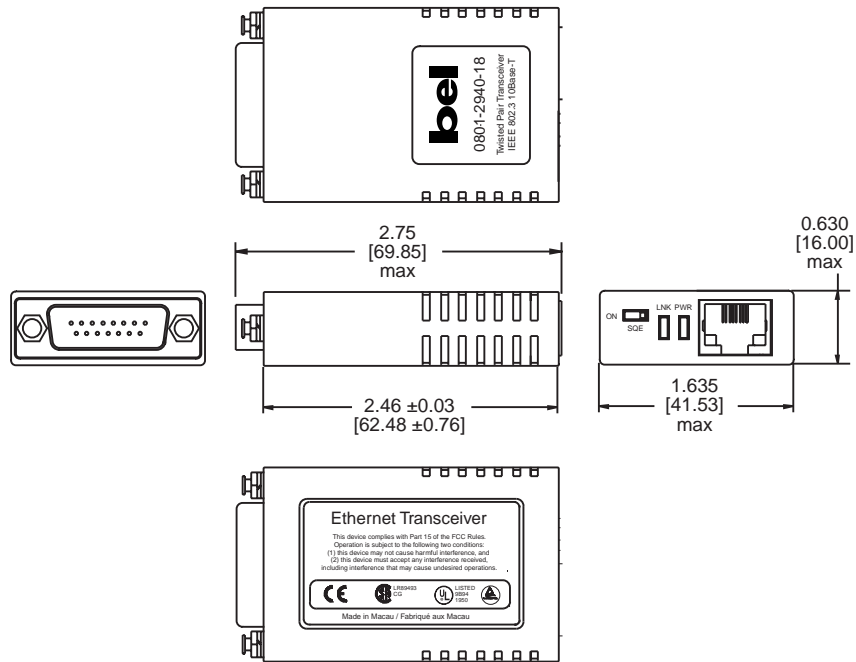

0801-2940-20

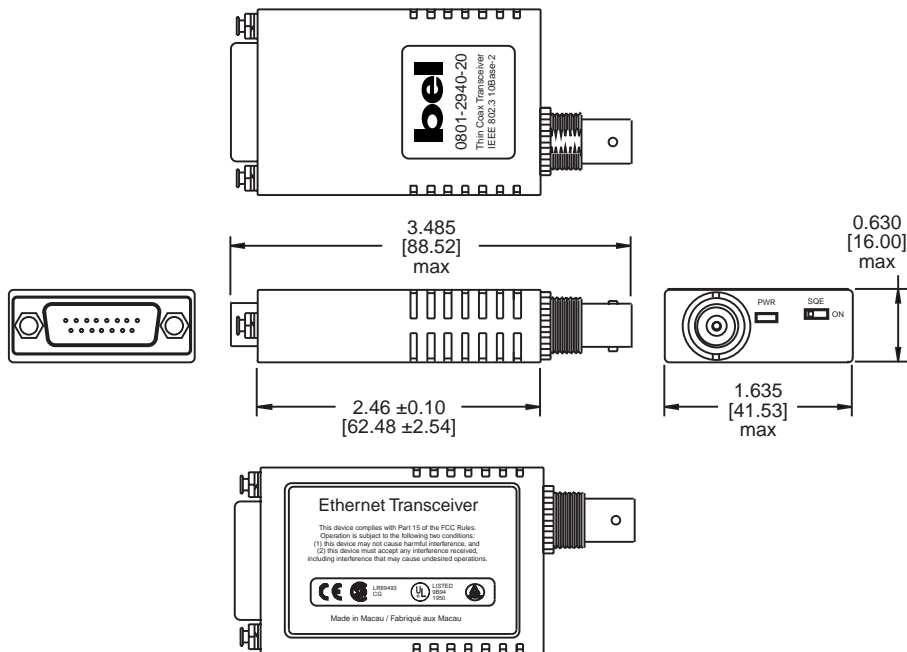

Dimensions are in inches [millimeters].  
Standard dimension tolerance is ±0.005 [0.13] unless otherwise noted.

©2000 Bel Fuse Inc. Specifications subject to change without notice. 06.00

### CORPORATE

Bel Fuse Inc.  
198 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
www.belfuse.com

### FAR EAST

Bel Fuse Ltd.  
8F / 8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706  
www.belfuse.com

### EUROPE

Bel Fuse Europe Ltd.  
Preston Technology Management Centre  
Marsh Lane, Suite G7, Preston  
Lancashire, PR1 8UD, U.K.  
Tel 44-1772-556601  
Fax 44-1772-888366  
www.belfuse.com