
# HFD3/HFD3-V

# **SUBMINIATURE SIGNAL RELAY**

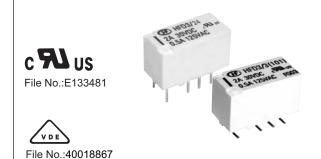

#### Features

- 3kV dielectric strength for HFD3-V (between coil and contacts)
- Surge withstand voltage up to 2500VAC, meets FCC Part 68 and Telecordia
- Meets EN60950 / EN41003
- SMT and DIP types available
- Bifurcated contacts
- Single side stable and latching type available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (15.0 x 7.5 x 9.0) mm

CONTACT DATA	
Contact arrangement	2C
Contact resistance	50mΩ (at 0.1A 6VDC)
Contact material	AgNi + Au plated
Contact rating	2A 30VDC
(Res. load)	0.5A 125VAC
Max. switching power	62.5VA / 60W
Max. switching voltage	250VAC / 220VDC
Max. switching current	2A
Min. applicable load	10mV 10μA
Mechanical endurance	1 x 10 <sup>8</sup> ops
	5 x 10⁵ops (at 1A 30VDC)
Electrical endurance	1 x 10 <sup>5</sup> ops (at 2A 30VDC)
	1 x 10⁵ ops (at 0.5A 125VAC)


SAFETY APPROVAL I	RATINGS
III &CIID (HED2)	2A 30VDC
UL&CUR (HFD3)	0.5A 125VAC
VDE (HED2)	2A 30VDC
VDE (HFD3)	0.5A 125VAC

**Notes:** Only some typical ratings are listed above. If more details are required, please contact us.

CHARACTERISTICS						
Insulation	resistance	1000MΩ (at 500VDC)				
Dielectric	Between coil & contacts	HFD3-V: 3000VAC 1min				
	between con & contacts	HFD3: 2000VAC 1min				
strength	Between open contacts	1000VAC 1min				
	Between contact sets	1500VAC 1min				
Surge wit	nstand voltage					
Between	open contacts (10×160µs)	1500VAC (FCC part 68)				
Between	coil & contacts (2×10µs)	2500VAC (Telecordia)				
Operate t	me (Set time)	4ms max.				
Release t	ime (Reset time)	4ms max.				
Ambient t	emperature	-40°C to 85°C				
Humidity		35% to 85% RH				
Vibration	Functional	10Hz to 55Hz 3.3mm DA				
resistance	Destructive	10Hz to 55Hz 5.0mm DA				
Shock	Functional	750m/s <sup>2</sup> (75g				
resistance	Destructive	1000m/s <sup>2</sup> (100g)				
Termination	on	DIP, SMT				
Unit weigl	nt	Approx. 2g				
Construct	ion	Wash tight				

Notes: The data shown above are initial values.

COIL		
	Single side stable	140mW
Coil power	1 coil latching	100mW
	2 coils latching (only for HFD3)	200mW
Temperature rise		50K max.



COIL DATA at 23°C

## Single side stable

Order Number	Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Coil Resistance Ω	Nominal Power mW	Max. Allowable Voltage VDC
HFD3/1.5; HFD3-V/1.5	1.5	1.13	0.15	16 x (1±10%)	140	2.2
HFD3/3; HFD3-V/3	3	2.25	0.3	64.3 x (1±10%)	140	4.5
HFD3/4.5; HFD3-V/4.5	4.5	3.38	0.45	145 x (1±10%)	140	6.7
HFD3/5; HFD3-V/5	5	3.75	0.5	178 x (1±10%)	140	7.5
HFD3/6; HFD3-V/6	6	4.5	0.6	257 x (1±10%)	140	9
HFD3/9; HFD3-V/9	9	6.75	0.9	579 x (1±10%)	140	13.5
HFD3/12; HFD3-V/12	12	9	1.2	1028 x (1±10%)	140	18
HFD3/24; HFD3-V/24	24	18	2.4	4114 x (1±10%)	140	36
HFD3/48; HFD3-V/48	48	36	4.8	8533 x (1±10%)	270	57.6

## 1 coil latching

Order Number	Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Coil Resistance Ω	Nominal Power mW	Max. Allowable Voltage VDC
HFD3/1.5-L1; HFD3-V/1.5-L1	1.5	1.13	1.13	22.5 x (1±10%)	100	2.7
HFD3/3-L1; HFD3-V/3-L1	3	2.25	2.25	90 x (1±10%)	100	5.4
HFD3/4.5-L1; HFD3-V/4.5-L1	4.5	3.38	3.38	203 x (1±10%)	100	8.1
HFD3/5-L1; HFD3-V/5-L1	5	3.75	3.75	250 x (1±10%)	100	9
HFD3/6-L1; HFD3-V/6-L1	6	4.5	4.5	360 x (1±10%)	100	10.8
HFD3/9-L1; HFD3-V/9-L1	9	6.75	6.75	810 x (1±10%)	100	16.2
HFD3/12-L1; HFD3-V/12-L1	12	9	9	1440 x (1±10%)	100	21.6
HFD3/24-L1; HFD3-V/24-L1	24	18	18	5760 x (1±10%)	100	43.2

## 2 coil latching

Order Number	Nominal Voltage VDC	Set Voltage VDC	Reset Voltage VDC	Coil Resistance Ω	Nominal Power mW	Max. Allowable Voltage VDC
HFD3/1.5-L2	1.5	1.13	1.13	11.2 x (1±10%)	200	2.2
HFD3/3-L2	3	2.25	2.25	45 x (1±10%)	200	4.5
HFD3/4.5-L2	4.5	3.38	3.38	101 x (1±10%)	200	6.7
HFD3/5-L2	5	3.75	3.75	125 x (1±10%)	200	7.5
HFD3/6-L2	6	4.5	4.5	180 x (1±10%)	200	9.0
HFD3/9-L2	9	6.75	6.75	405 x (1±10%)	200	13.5
HFD3/12-L2	12	9	9	720 x (1±10%)	200	18
HFD3/24-L2	24	18	18	2880 x (1±10%)	200	36

Notes: When user's requirements can't be found in the above table, please counsel with Hongfa for relay application support.

#### **ORDERING INFORMATION** -L2 HFD3 S 24 R HFD3-V: 3kV dielectric strength Type HFD3: 2kV dielectric strength 1.5, 3, 4.5, 5, 6, 9, 12, 24, 48VDC <sup>1)</sup> Coil voltage Nil: Single side stable L1: 1 coil latching Sort L2: 2 coils latching (only for HFD3) **Terminal type** S: Standard SMT \$1: Short terminal SMT Nil: DIP Packing style R: Tape and reel packing (Only for SMT type) Nil: Tube packing Customer special code (Only for special requirements)

Notes: 1) 48VDC coil voltage is only for single side stable version.


2) HFD3 is also RoHS compliant.

# **OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT**


Unit: mm

Single side stable & 1 coil latching

Outline Dimensions (DIP type)




2 coils latching




Single side stable & 1 coil latching

PCB Layout (DIP type) (Bottom view)



2 coils latching




# **OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT**


Unit: mm

Single side stable & 1 coil latching

2 coils latching

Outline Dimensions (S type: Standard SMT)







Single side stable & 1 coil latching

2 coils latching

PCB Layout

(S type: Standard SMT) (Bottom view)







Single side stable & 1 coil latching

2 coils latching

Outline Dimensions (S1 type: Short terminal SMT)






Single side stable & 1 coil latching


2 coils latching

**PCB** Layout


(S1 type: Short terminal SMT)

(Bottom view)






Wiring Diagram (Bottom view)



Single side stable

+ 1 - 3 4 5 - 1 - 10 9 8 reset condition

1 coil latching




### Notice


- 1. Relay is on the "reset" status when being released from stock, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" status, therefore, when application ( connecting the power supply), please reset the relay to "set" or "reset" status on request.
- 2. In order to maintain "set" or "reset" status, energized voltage to coil should reach the rated voltage, impulse width should be 5 times more than "set" or "reset" time. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized.

TAPE PACKING Unit: mm

## Direction of Relay Insertion


## Reel Dimensions

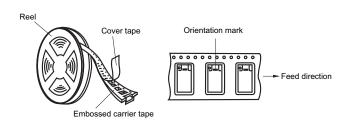




Notes: 1) Packing: 400pcs/reel, 5 reels/carton.
2) MOQ for reel packing is 800pcs.

## Tape Dimensions (S type: Standard SMT)

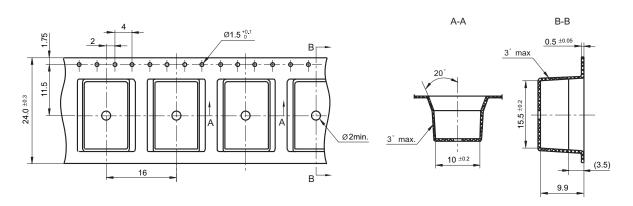

Tape Dimensions (S1 type: Short terminal SMT)

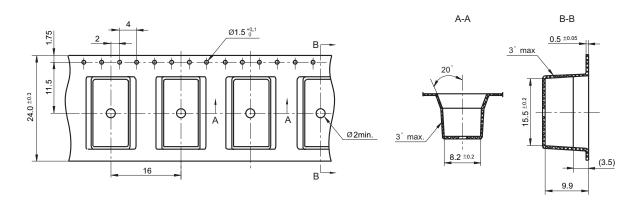


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤1mm, tolerance should be ±0.2mm; outline dimension >1mm and ≤5mm, tolerance should be ±0.3mm; outline dimension >5mm, tolerance should be ±0.4mm.


- 2) The tolerance without indicating for PCB layout is always ±0.1mm.
- 3) The width of the gridding is 2.54mm.

# **CHARACTERISTIC CURVES**

#### MAXIMUM SWITCHING POWER



#### **ENDURANCE CURVE**



Contact Current (A)

#### Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.