

ELECTRICAL SPECIFICATIONS:

NOTES

1.0 TURNS RATIO: (P6-P5-P4) : (J6-J3) (P3-P2-P1) : (J2-J1) : 1CT : 1± 3% : 1CT : 1 ± 3%

1.0 PINS WITHOUT ELECTRICAL CONNECTION ARE OMITTED.

2.0 INDUCTANCE: (P6-P4)

(P3-P1)

: 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias : 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias

3.0 LEAKAGE INDUCTANCE: P6-P4 (WITH J6 AND J3 SHORT)

P3-P1 (WITH J2 AND J1 SHORT)

: 0.3 MAX. @ 1MHz : 0.3 MAX. @ 1MHz

4.0 INTERWINDING CAPACITANCE: (P6,P5,P4) TO (J6,J3) (P3,P2,P1) TO (J2,J1)

: 30pf MAX @ 1MHz : 30pf MAX. @ 1MHZ

5.0 DC RESISTANCE: (J1-J2)

(P6-P4)

: 1.2 ohms Max. : 1.2 ohms Max.

Bel Stewart Connector

11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199 717.234.7512

SHEET

http://www.stewartconnector.com

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

DRAWING NO. 1 OF 4

SI - 60029

RECEIVE

6.0 RETURN LOSS: 1MHz TO 30MHz : 18dB MIN.

60MHz TO 80MHz : 12dB MIN.

7.0 DIELECTRIC WITHSTAND: (J1, J2) TO (P1, P2) (J3, J6) TO (P8,P7) : 1500 VAC

: 1500 VAC

8.0 INSERTION LOSS: RS=RL=100 ohms

100KHz TO 100MHz : 1.1 dB TYP

9.0 RISE TIME: RS=100 OHMS AND RL = 100 OHMS

OUTPUT VOLTAGE = 1 V peak: 3.0 nS MAX : 3.0 nS MAX PULSE WIDTH= 112nS


10.0 CROSS TALK: 1MHz TO 100MHz : 35 dB TYP


11.0 COMMON TO COMMON MODE ATTENUATION: 1MHz TO 100MHz : 35dB TYP


Bel Stewart Connector

11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199 717.234.7512

http://www.stewartconnector.com

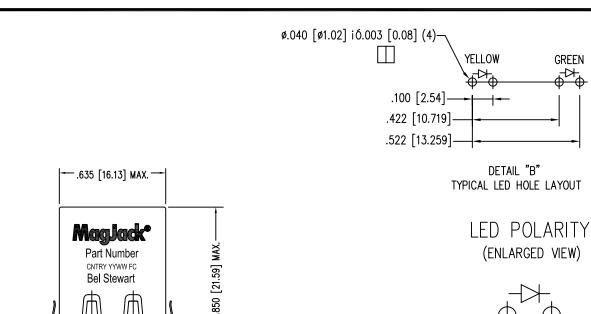




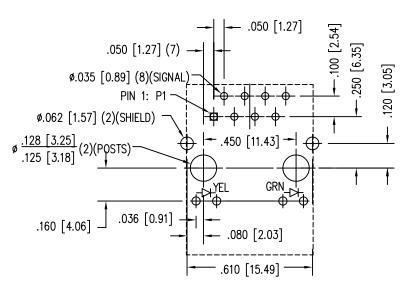


P.C.B. RECOMMENDED HOLE LAYOUT SEEN FROM COMPONENT SIDE

ALL CENTERLINE DIMENSIONS ARE BASIC.



Bel Stewart

·(.708 [17.98])

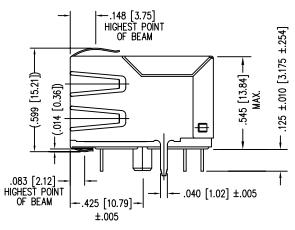

	LED SPECIFICATION			
5	STANDARD LED	WAVELENGTH	* Forward V (MAX)	(TYP)
	GREEN	565 nm	2.5 V	2.1 V
	YELLOW	590 nm	2.5 V	2.1 V

*WITH A FORWARD CURRENT OF 20 mA

NOTES:

1. CONNECTOR MATERIALS:

HIGH TEMPERATURE THERMOPLASTIC UL94 V-0

HEAT DEFLECTION TEMPERATURE - 265°C

CONTACT/SHIELD: COPPER ALLOY SHIELD PLATING: NICKEL OR TIN CONTACT PLATING: SELECTIVE GOLD

50 MICRO-INCHES MIN. IN CONTACT AREA.

- 2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED. SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- 3. TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
- 4. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ±.005 [0.13]
- 5. REFLOW AND WAVE SOLDER COMPATIBLE -260°C FOR 10 SECONDS MAX.

Bel Stewart Connector


11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199 717.234.7512


http://www.stewartconnector.com

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING OF BEL STEWART CONNECTOR.

SHEET 3 OF 4

DRAWING NO. SI-60029 REV. 05

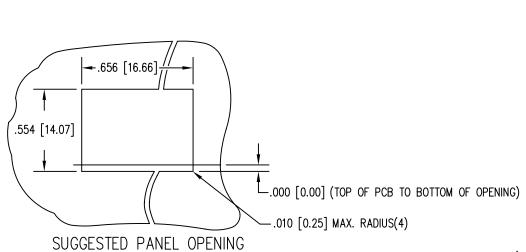

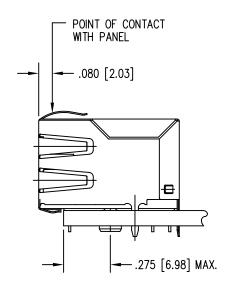

- 1. THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING CAPABILITY.
- 2. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ±.005 [0.13]

Bel Stewart Connector

11118 Susquehanna Trail, South Glen Rock, Pa 17327-9199 717.234.7512

SHEET 4

http://www.stewartconnector.com

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

DRAWING NO. OF 4

SI-60029