


# PRODUCT SPECIFICATION

DATE : 03/01/2005

|   |  |              |           |
|---|--|--------------|-----------|
| <b>cosmo</b><br>ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT<br><b>KAQV213H</b> | Preliminary  | REV.<br>0 |
|   |  | SHEET 1 OF 7 |           |



## ● OUTSIDE DIMENSION :

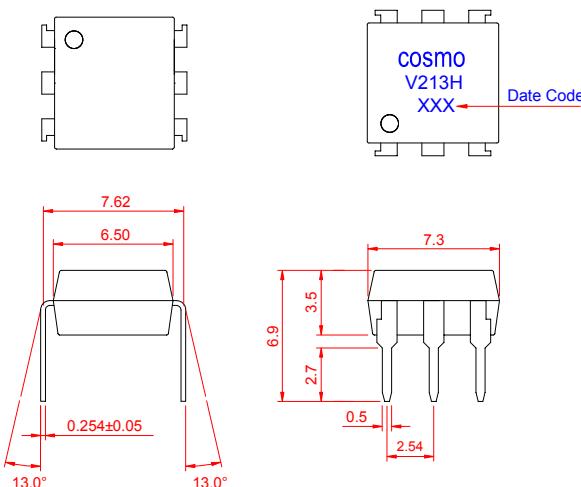

Unit : mm

Tolerance : ±0.2mm

## ● Turn On / Turn Off time

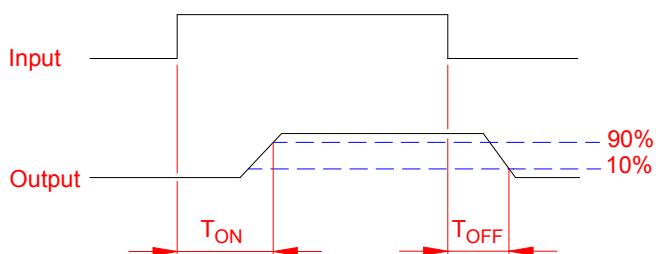

## ● Absolute Maximum Ratings

( Ta=25°C )

| Emitter (Input)                          | Detector (Output)                     |
|--|---------------------------------------|
| Reverse Voltage ..... 5.0V               | Output Breakdown Voltage ..... ± 250V |
| Continuous Forward Current ..... 50mA    | Continuous Load Current ..... ± 200mA |
| Peak Forward Current ..... 1A            | Power Dissipation ..... 500mW         |
| Power Dissipation ..... 100mW            |                                       |
| Derate Linearly from 25°C ..... 1.3mW/°C |                                       |

## General Characteristics

|   |   |
|---|---|
| Isolation Test Voltage ..... 5000VACrms                                 | Storage Temperature Range ..... -40°C to +125°C |
| Isolation Resistance ..... Vio=500V, Ta=25°C ..... $\geq 10^{10}\Omega$ | Operating Temperature Range ... -40°C to +85°C  |
|   | Junction Temperature ..... 100°C                |
| Total Power Dissipation ..... 550mW                                     | Soldering Temperature ,                         |
| Derate Linearly from 25°C ..... 2.5mW/°C                                | 2mm from case , 10 sec ..... 260°C              |

# PRODUCT SPECIFICATION

DATE : 03/01/2005

|   |  |              |           |
|---|--|--------------|-----------|
| <b>cosmo</b><br>ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT<br><b>KAQV213H</b> | Preliminary  | REV.<br>0 |
|   |  | SHEET 2 OF 7 |           |

## ● Electro-optical Characteristics

( Ta=25°C )

| Parameter                | Symbol     | Conditions   | Min.                                   | Typ. | Max. | Unit.         |
|--------------------------|------------|--|--|------|------|---------------|
| Emitter ( Input )        |            |  |  |      |      |               |
| Forward Voltage          | $V_F$      | $I_F=10\text{mA}$  |  | 1.2  | 1.5  | V             |
| Operation Input Current  | $I_{FON}$  | $V_L=\pm 20\text{V}$ , $I_L=100\text{mA}$ , $t=10\text{ms}$                          |  |      | 5.0  | mA            |
| Recovery Input Current   | $I_{FOFF}$ | $V_L=\pm 20\text{V}$ , $I_L \leq 5\mu\text{A}$                                       | 0.2                                    |      |      | mA            |
| Detector ( Output )      |            |  |  |      |      |               |
| Output Breakdown Voltage | $V_B$      | $I_B=50\mu\text{A}$  | 250                                    |      |      | V             |
| Output Off-State Leakage | $I_{TOFF}$ | $V_T=100\text{V}$ , $I_F=0\text{mA}$   |  | 0.2  | 1    | $\mu\text{A}$ |
| I/O Capacitance          | $C_{ISO}$  | $I_F=0$ , $f=1\text{MHz}$  |  | 6    |      | pF            |
| ON Resistance            | Connection | $R_{ON}$   | $I_L=100\text{mA}$ , $I_F=10\text{mA}$ | 8    |      | $\Omega$      |
|                          |            |  |  | 4    |      |               |
|                          |            |  |  | 2    |      |               |
| Turn-On Time             | $T_{ON}$   | $I_F=10\text{mA}$ , $V_L=\pm 20\text{V}$<br>$t=10\text{ms}$ , $I_L=\pm 100\text{mA}$ |  | 0.3  | 1.0  | ms            |
| Turn-Off Time            | $T_{OFF}$  |  |  | 0.7  | 1.5  | ms            |

## ● Schematic and Wiring Diagrams

| Schematic | Output Configuration | Load  | Connection | Wiring Diagrams |
|-----------|----------------------|-------|------------|-----------------|
|           | 1a                   | AC/DC | A          |                 |
|           | 1a                   | DC    | B          |                 |
|           | 1a                   | DC    | C          |                 |

# PRODUCT SPECIFICATION

DATE : 03/01/2005

|   |  |              |           |
|---|--|--------------|-----------|
| <b>cosmo</b><br>ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT<br><b>KAQV213H</b> | Preliminary  | REV.<br>0 |
|   |  | SHEET 3 OF 7 |           |

## ● Data Curve

Load current vs. ambient temperature



Allowable ambient Temperature :

-40°C to +85°C

On resistance vs. ambient temperature across terminals 4 and 6 pin

LED current : 5mA

Continuous load current : 200mA (DC)

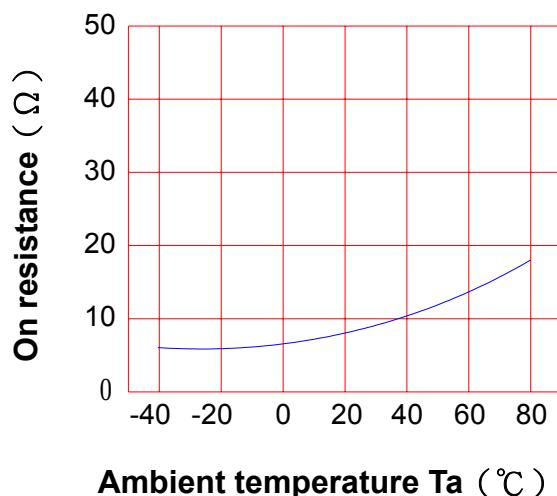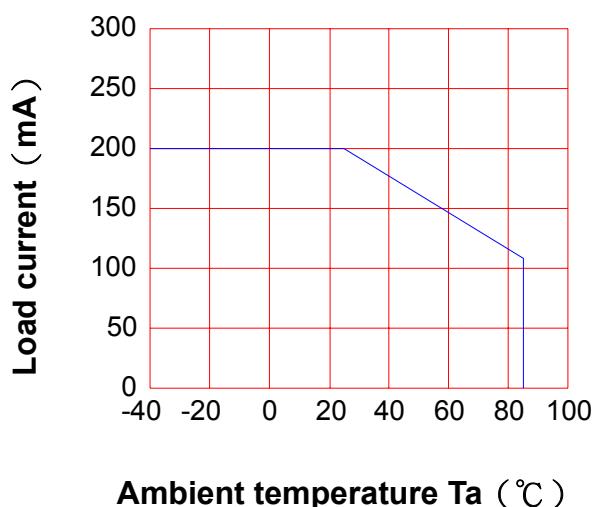

Turn On Time vs. ambient temperature

Load voltage 250V (DC)

LED current : 5mA



Continuous load current : 200mA (DC)

Turn Off Time vs. ambient temperature

Load voltage 250V (DC)

LED current : 5mA

Continuous load current : 200mA (DC)

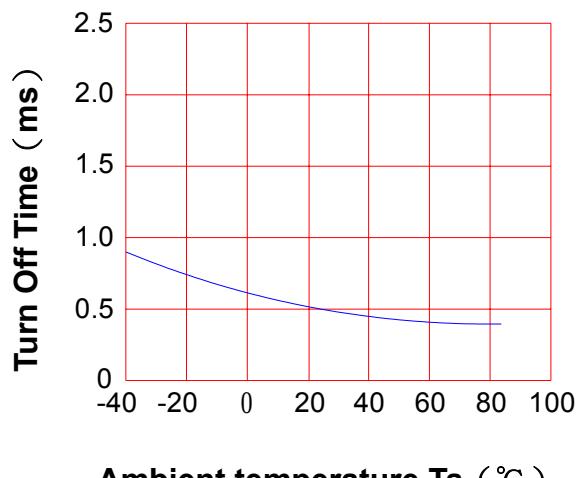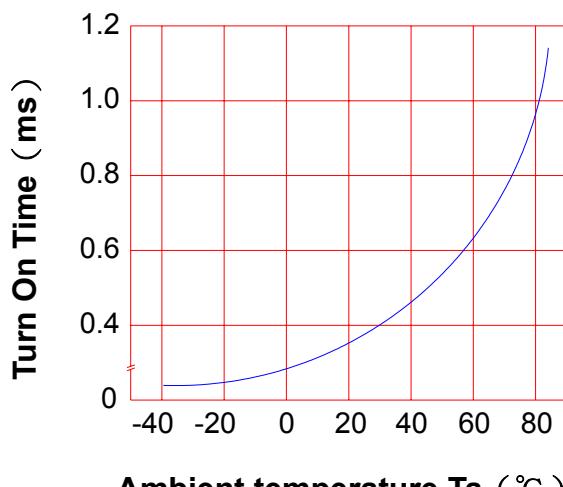

# PRODUCT SPECIFICATION

DATE : 03/01/2005


|   |  |              |      |
|---|--|--------------|------|
| <b>cosmo</b><br>ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT<br><b>KAQV213H</b> | Preliminary  | REV. |
|   |  | SHEET 4 OF 7 | 0    |

LED operate current vs.

ambient temperature

Load Voltage : 250V (DC)

Continuous load current : 200mA (DC)

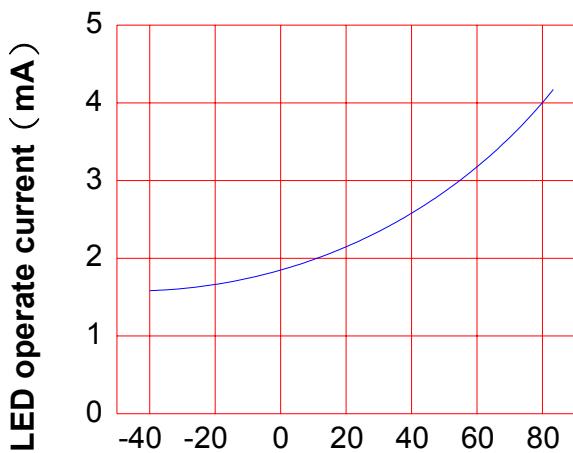


Ambient temperature Ta (°C)

LED Turn Off current vs.

ambient temperature

Load Voltage : 250V (DC)

Continuous load current : 200mA (DC)

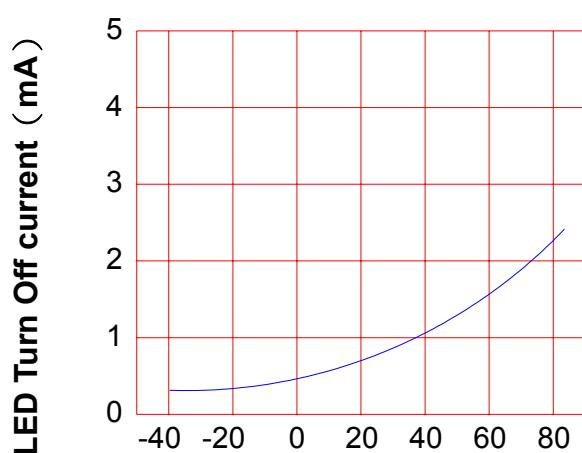


Ambient temperature Ta (°C)

LED dropout voltage vs.

ambient temperature

LED current : 5 to 50mA

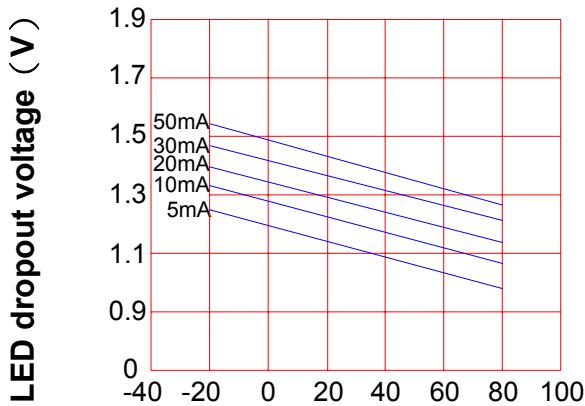


Ambient temperature Ta (°C)

Voltage vs. current characteristics of output at MOSFET portion

Measured portion : across terminals 4 and 6 pin

Ambient temperature : 25°C

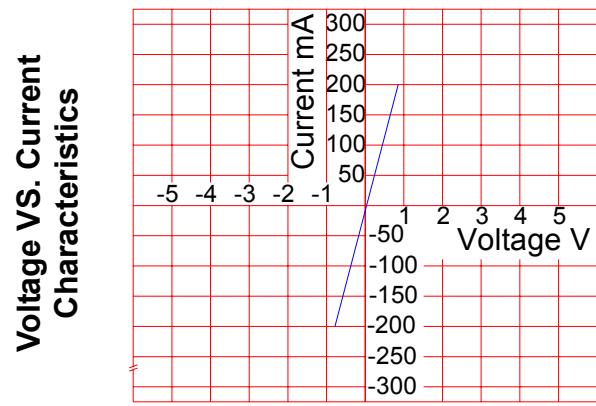

Ambient temperature : 25°C

# PRODUCT SPECIFICATION

DATE : 03/01/2005

|   |  |              |           |
|---|--|--------------|-----------|
| <b>cosmo</b><br>ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT<br><b>KAQV213H</b> | Preliminary  | REV.<br>0 |
|   |  | SHEET 5 OF 7 |           |


## LED forward current vs. Turn On Time

Across terminals 4 and 6pin

Load voltage : 250V (DC)

Continuous load current : 200mA (DC)


Ambient temperature : 25°C

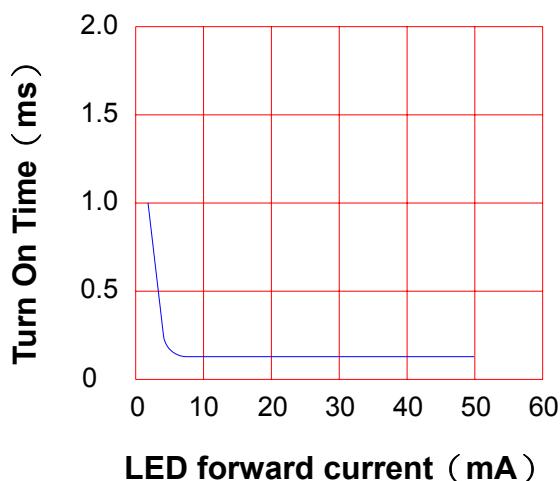

## Off state leakage current

Across terminals 4and 6 pin

Ambient temperature : 25°C

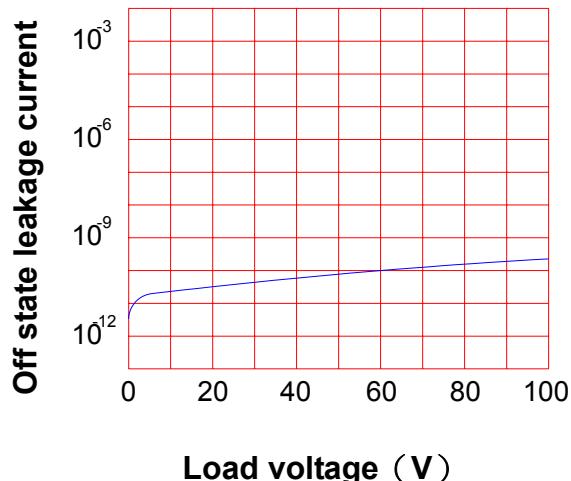


## LED forward current vs. reverse(ON) time

Across terminals 4 and 6 pin

Load voltage : 250V (DC)

Continuous load current : 200mA (DC)

Ambient temperature : 25°C

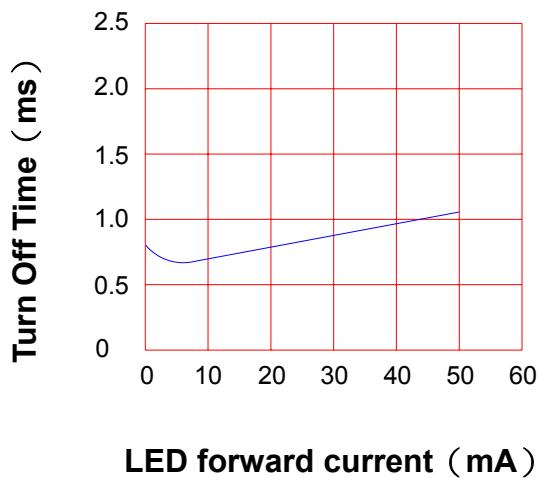


## Applied voltage vs. output capacitance

Across terminals 4 and 6 pin

Frequency : 1MHz

Ambient temperature : 25°C

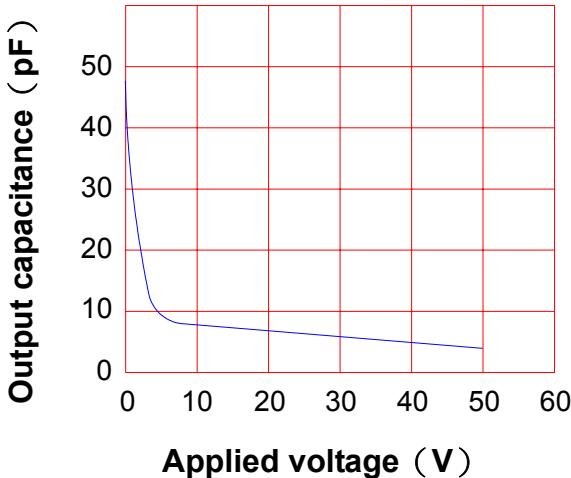

# PRODUCT SPECIFICATION

DATE : 03/01/2005


|   |  |              |           |
|---|--|--------------|-----------|
| <b>cosmo</b><br>ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT<br><b>KAQV213H</b> | Preliminary  | REV.<br>0 |
|   |  | SHEET 6 OF 7 |           |

## ● USING METHODS

Examples of resistance value to control LED forward current (IF)


SSR-MOSFET OUTPUT

( IF=5mA )

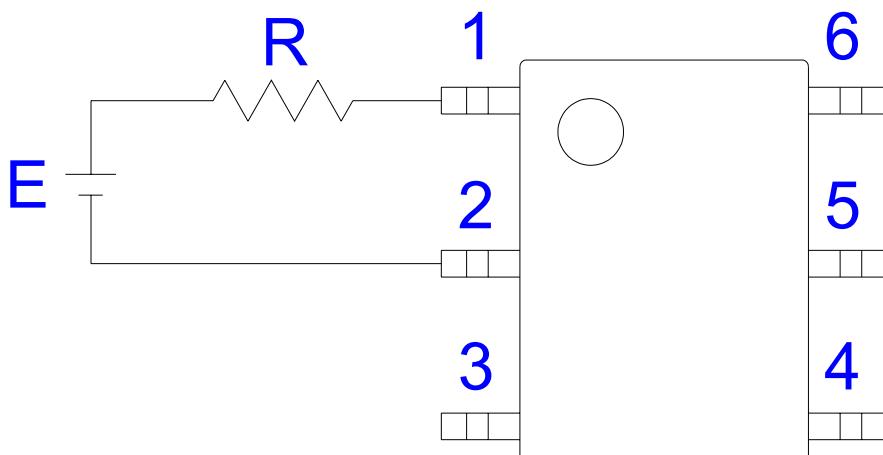

| E    | R              |
|------|----------------|
| 3.3V | Approx. 330 Ω  |
| 5V   | Approx. 640 Ω  |
| 12V  | Approx. 1.9K Ω |
| 15V  | Approx. 2.5K Ω |
| 24V  | Approx. 4.1K Ω |

- (1) LED forward current must be more than 5mA , at E min.
- (2) LED forward current must be less than 50mA , at E max.

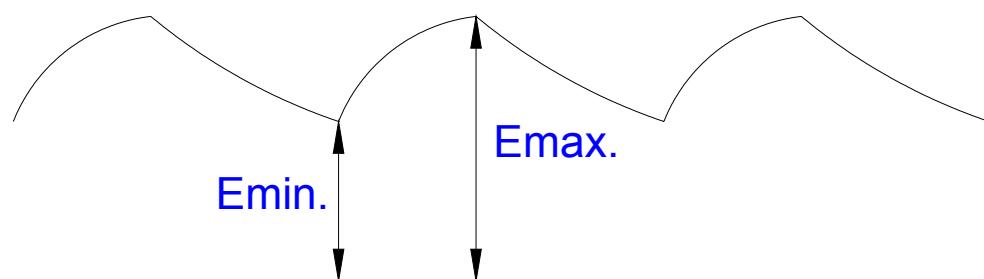



# PRODUCT SPECIFICATION

DATE : 03/01/2005

|   |  |              |           |
|---|--|--------------|-----------|
| <b>cosmo</b><br>ELECTRONICS CORPORATION | SOLID STATE RELAY - MOSFET OUTPUT<br><b>KAQV213H</b> | Preliminary  | REV.<br>0 |
|   |  | SHEET 7 OF 7 |           |

## ● USING METHODS

Regulate the spike voltage generated on the inductive load as follows :

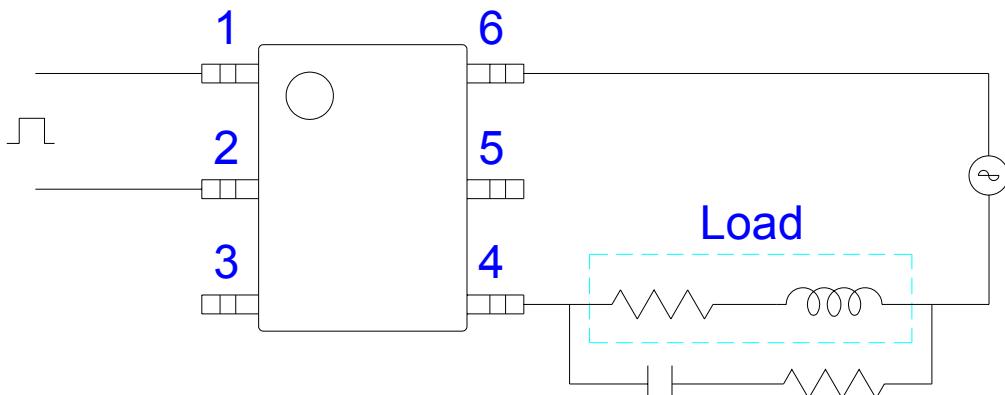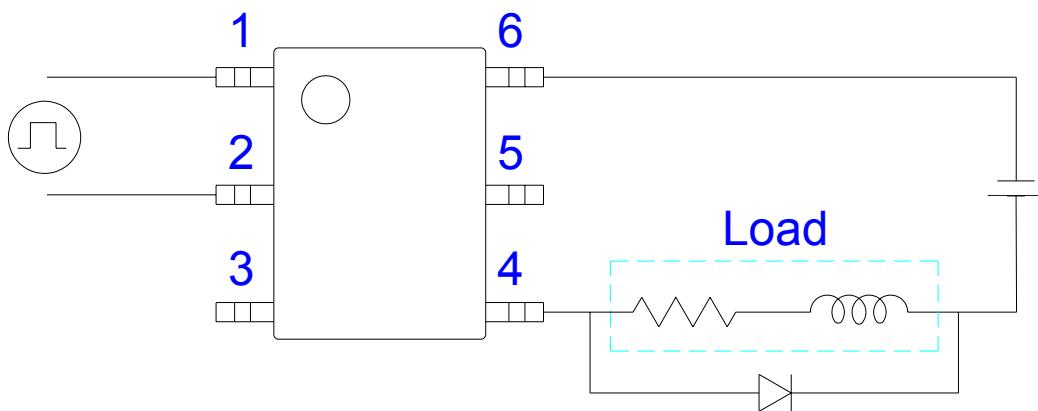

R-C Snubber