TOTAL POWER INT'L

500W with PFC and Parallel Function

PSP-500 series




Features:

- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- Protections:Short circuit/Over load/Over voltage/Over temperature
- Foced air cooling by built-in DC fan
- Current sharing up to 2000W(3+1)
- With power good and fail signal output
- Built-in remote ON-OFF control
- · Built-in remote sense function
- 3 years warranty

SPECIFICATION



MODEL		PSP-500-5	PSP-500-12	PSP-500-13.5	PSP-500-15	PSP-500-24	PSP-500-27	PSP-500-48			
	DC VOLTAGE	5V	12V	13.5V	15V	24V	27V	48V			
	RATED CURRENT	80A	41.5A	37A	33A	20.8A	18.5A	10.5A			
	CURRENT RANGE	0~80A	0 ~ 41.5A	0 ~ 37A	0 ~ 33A	0 ~ 20.8A	0 ~ 18.5A	0 ~ 10.5A			
	RATED POWER	400W	498W	499.5W	495W	499.2W	499.5W	504W			
	RIPPLE & NOISE (max.) Note.2	100mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p			
OUTPUT	VOLTAGE ADJ. RANGE	4.75 ~ 5.5V	10 ~ 13.2V	12 ~ 15V	13.5 ~ 18V	20 ~ 26.4V	24 ~ 30V	41 ~ 56V			
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.3%	±0.3%	±0.3%	±0.2%	±0.2%	±0.2%			
	LOAD REGULATION	±2.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	SETUP, RISE TIME	1500ms, 50ms at	1500ms, 50ms at full load								
	HOLD TIME (Typ.)	24ms at full load									
		90 ~ 264VAC 127 ~ 370VDC									
	FREQUENCY RANGE	47 ~ 63Hz									
	POWER FACTOR (Typ.)	0.95/230VAC									
INPUT	EFFICIENCY (Typ.)	76%	82%	82%	82%	84%	84%	86%			
	AC CURRENT (Typ.)	7A/115AVC	3.5A/230VAC	1 /-	1 - 7 - 7	1 2 1 70	2.770	12276			
	INRUSH CURRENT (Typ.)	20A/115VAC 40A/230VAC									
	LEAKAGE CURRENT	<1mA / 240VAC									
		110 ~ 125% rated output power									
	OVER LOAD	Protection type: Constant current limiting, recovers automatically after fault condition is removed									
		5.75 ~ 6.75V	13.8 ~ 16.2V	15.5 ~ 18.2V	18 ~ 21V	27.6 ~ 32.4V	31 ~ 36.5V	57.6 ~ 67.2			
PROTECTION	OVER VOLTAGE				1	27.0 02.44	01 00.01	07.0 07.2			
		Protection type : Shut down o/p voltage, re-power on to recover RTH2≥95°C Detect on heatsink of Q1,Q7 power transistor & L3 output choke									
	OVER TEMPERATURE	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down									
FUNCTION	REMOTE CONTROL	RC+/RC-: 0 ~ 0.8V=power on ; 4 ~ 10V=power off sink current <4 ~ 10MA									
IONOTION	WORKING TEMP.	-10 ~ +60°C (Refer to output load derating curve)									
	WORKING HUMIDITY	20 ~ 90% RH with 30CFM forced air non-condensing									
ENVIRONMENT	STORAGE TEMP., HUMIDITY	20 ~ +85°C, 10 ~ 95% RH									
LIVINONIILIVI	TEMP. COEFFICIENT	±0.03%°C (0~50°C)									
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes									
	SAFETY STANDARDS		EN60950-1 Appro	<u> </u>	, 2 0,000						
	WITHSTAND VOLTAGE		• • • • • • • • • • • • • • • • • • • •	O/P-FG:0.5KVA	^						
SAFETY&	ISOLATION RESISTANCE										
SAFEIT &	EMI CONDUCTION & RADIATION		D/P-FG:100M Ohn N55022 (CISPR22								
(Note 4)	HARMONIC CURRENT	•	•) Class B							
, ,	EMS IMMUNITY	Compliance to El	, .	C 0 44. ENV/50004	ENECODA Linktin		:- A				
	MTBF			6,8,11; ENV50204,	ENSSUZ4, LIGHT IN	idustry level, criter	Ia A				
OTHERS			MIL-HDBK-217	F (25 C)							
OTHERS	DIMENSION	278*129*63.5mm	,								
	1 All parameters NOT special	2.6Kg; 6pcs/15.7		VAC input rated to	and 25°C of a	umbient temperatur	~				
NOTE	 All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance: includes set up tolerance, line regulation and load regulation. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. In parallel connection, maybe only one unit operated, if the total output load less than 5% of rated load condition. Derating may be needed under low input voltages. Please check the derating curve for more details. 										

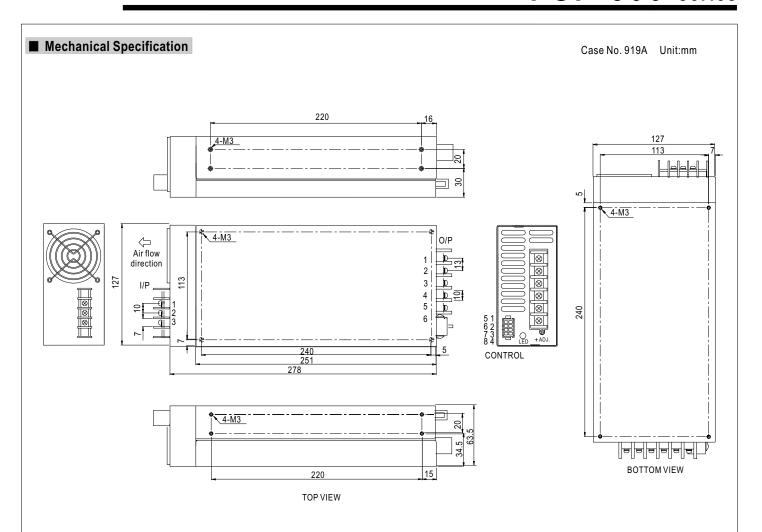

AC Input Terminal Pin. No. Assignment


Pin No.	Assignment			
1	AC/L			
2	AC/N			
3	FG ±			

Pin No.	Assignment	
1~3	DC OUTPUT +V	
4~6	DC OUTPUT -V	


DC Output Terminal Pin. No Assignment Control Pin. No Assignment : MOLEX 5559-NP uses 5558 male crimp terminal


Pin No.	Assignment	Pin No.	Assignment	Mating connector	Terminal
1	P(Current share)		NC		MOLEX 5556
2	-S	6	PF(Power fail signal)	MOLEY 5557-NR	Female crimp Terminal receptacle
3	G	7	+S	WOLLX 5557-WK	
4	RC-	8	RC+		receptable

■ Derating Curve



■ Output Derating VS Input Voltage



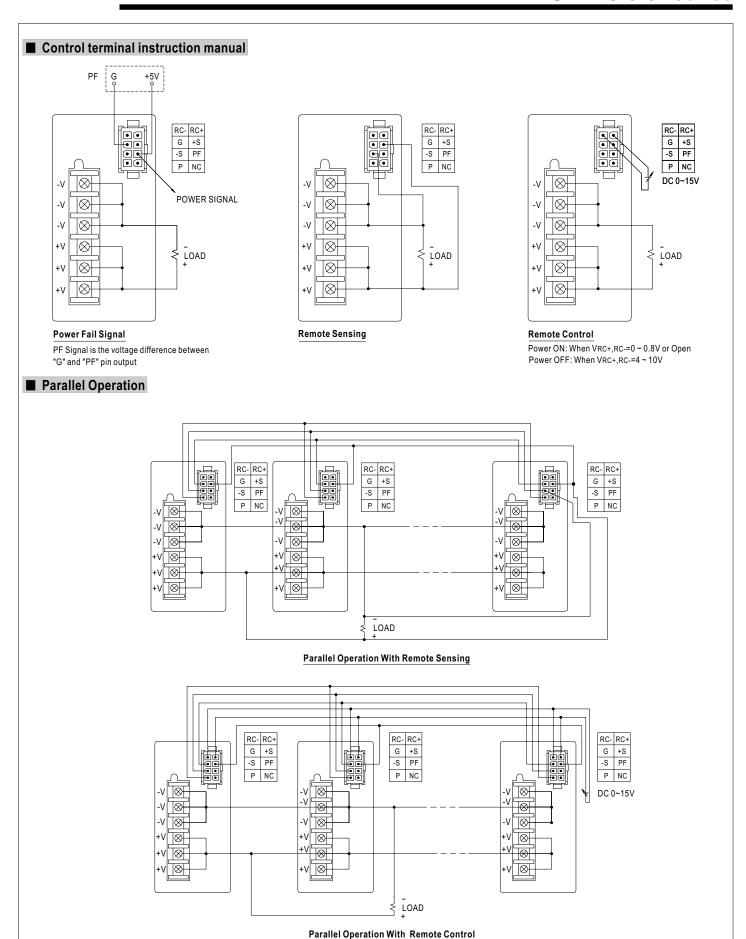




Features:

- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- Protections:Short circuit/Over load/Over voltage/Over temperature
- · Foced air cooling by built-in DC fan
- Current sharing up to 2000W(3+1)
- · With power good and fail signal output
- Built-in remote ON-OFF control
- · Built-in remote sense function
- 3 years warranty

Parallel PC c SUs A SWATT CB

SPECIFICATION MODEL PSP-500-5P PSP-500-12P PSP-500-13.5P PSP-500-15P PSP-500-24P PSP-500-27P PSP-500-48P DC VOLTAGE 12V 5V 13.5V 15V 24V 27V 48V RATED CURRENT 80A 41.5A 37A 33A 20.8A 18.5A 10.5A **CURRENT RANGE** 0~80A 0~41.5A 0~37A 0 ~ 33A 0 ~ 20.8A 0 ~ 18.5A 0 ~ 10.5A RATED POWER 400W 498W 499.5W 495W 499.2W 499.5W 504W RIPPLE & NOISE (max.) Note.2 100mVp-p 150mVp-p 150mVp-p 150mVp-p 150mVp-p 150mVp-p 200mVp-p OUTPUT **VOLTAGE ADJ. RANGE** 4.75 ~ 5.5V 10 ~ 13.2V 12 ~ 15V 13.5 ~ 18V 20 ~ 26.4V 24 ~ 30V 41 ~ 56V VOLTAGE TOLERANCE Note.3 ±2.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% ±1.0% LINE REGULATION ±0.5% ±0.3% ±0.3% ±0.3% ±0.2% ±0.2% ±0.2% LOAD REGULATION ±2.0% ±0.5% ±0.5% ±0.5% ±0.5% ±0.5% ±0.5% SETUP, RISE TIME 1500ms, 50ms at full load **HOLD TIME (Typ.)** 24ms at full load Note.5 90 ~ 264VAC **VOLTAGE RANGE** 127 ~ 370VDC **FREQUENCY RANGE** 47 ~ 63Hz POWER FACTOR (Typ.) 0.95/230VAC 0.98/100VAC at full load INPUT **EFFICIENCY (Typ.)** 76% 82% 82% 82% 84% 84% 86% AC CURRENT (Typ.) 7A/115AVC 3.5A/230VAC **INRUSH CURRENT (Typ.)** 20A/115VAC 40A/230VAC **LEAKAGE CURRENT** <1mA / 240VAC 110 ~ 125% rated output power OVER LOAD Protection type: Constant current limiting, recovers automatically after fault condition is removed 5.75 ~ 6.75V 13.8 ~ 16.2V 15.5 ~ 18.2V 18 ~ 21V 27.6 ~ 32.4V 31 ~ 36.5V 57.6 ~ 67.2V PROTECTION | OVER VOLTAGE Protection type: Shut down o/p voltage, re-power on to recover RTH2≥95°C Detect on heatsink of Q1,Q7 power transistor & L3 output choke **OVER TEMPERATURE** Protection type: Shut down o/p voltage, recovers automatically after temperature goes down REMOTE CONTROL **FUNCTION** RC+/RC-: 0 ~ 0.8V=power on ; 4 ~ 10V=power off sink current <4 ~ 10mA -10 ~ +60°C (Refer to output load derating curve) WORKING TEMP. 20 ~ 90% RH with 30CFM forced air non-condensing WORKING HUMIDITY STORAGE TEMP., HUMIDITY -20 ~ +85°C, 10 ~ 95% RH ENVIRONMENT **TEMP. COEFFICIENT** ±0.03%/°C (0 ~ 50°C) **VIBRATION** 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes SAFETY STANDARDS UL1950, TUV EN60950-1 Approved I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC WITHSTAND VOLTAGE ISOLATION RESISTANCE SAFETY & I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC **EMI CONDUCTION & RADIATION** Compliance to EN55022 (CISPR22) Class B **EMC** (Note 4) HARMONIC CURRENT Compliance to EN61000-3-2,-3 Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, Light industry level, criteria A **EMS IMMUNITY** MTRF 130.1K hrs min. MIL-HDBK-217F (25°C) **OTHERS DIMENSION** 250*123*50mm (L*W*H) 1.3Kg; 6pcs/7.8Kg/0.89CUFT **PACKING** 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. NOTE 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance: includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets **FMC** directives 5. Derating may be needed under low input voltages. Please check the derating curve for more details.

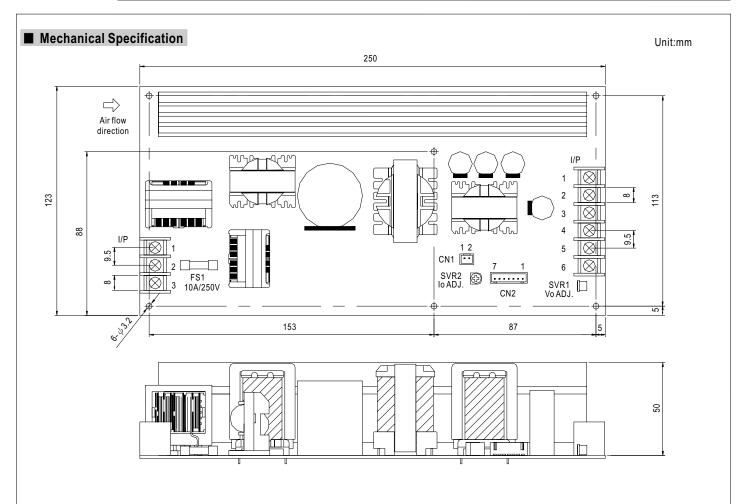

AC Input Terminal Pin. No. Assignment

Pin No.	Assignment	
1	AC/L	
2	AC/N	
3	FG ±	

DC Output Terminal Pin. No Assignment

Pin No.	Assignment
1~3	DC OUTPUT +V
4~6	DC OUTPUT -V

Connector Pin. No. Assignment(CN1): JST B2B-XH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	GND	JST XHP	JST SXH-001T-P0.6
2	+12V	or equivalent	or equivalent

Connector Pin. No. Assignment (CN2): JST B7B-XH or equivalent

Pin No.	Assignment	Pin No.	Assignment	Mating Housing	Terminal
1	P(Current share)	5	Power fail signal		
2	+S	6	RC+		JST SXH-001T-P0.6
3	-S	7	RC-	or equivalent	or equivalent
4	GND				

■ Derating Curve

■ Output Derating VS Input Voltage

