


BL-HX134A-TRB

Features:

- 1. Emitted Color: Hi-Eff Green
- 2. Lens Appearance: Water Clear.
- 3. Mono-color type.
- 4. 3.2x1.0x2.0mm(1204) standard package.
- 5. Suitable for all SMT assembly methods.
- Compatible with infrared and vapor phase reflow solder process.
- 7. Compatible with automatic placement equipment.
- 8. This product doesn't contain restriction Substance, comply ROHS standard.

Applications:

- Automotive: Dashboards, stop lamps, turn signals.
- 2. Backlighting: LCDs, Key pads advertising.
- 3. Status indicators : Comsumer & industrial electronics.
- 4. General use.

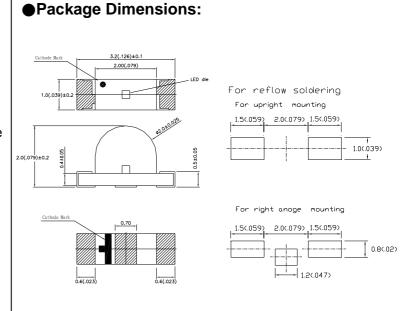

NOTES:

- 1.All dimensions are in millimeters (inches).
- 2.Tolerance is ±0.10mm (0.004") unless otherwise specified.
- 3. Specifications are subject to change without notice.

■ Absolute Maximum Ratings(Ta=25°C)

| Parameter | Symbol | Rating | Unit |
|-------------------------|-----------------|------------|------|
| Power Dissipation | Pd | 100 | mW |
| Forward Current | I _F | 30 | mA |
| Peak Forward Current *1 | I _{FP} | 100 | mA |
| Reverse Volage | V_R | 5 | V |
| Operating Temperature | Topr | -25°℃~80°℃ | - |
| Storage Temperature | Tstg | -30°℃~85°℃ | - |
| Soldering Temperature | Tsol | See Page6 | - |





BL-HX134A-TRB


■ Electrical and optical characteristics(Ta=25°C)


| Parameter | Symbol | Condition | Min. | Тур. | Max. | Unit |
|--------------------------|-------------------|----------------------|------|------|------|------|
| Forward Voltage | Vf | I _F =20mA | - | 2.2 | 2.6 | V |
| Luminous Intensity | lv | I _F =20mA | 8.2 | 20 | - | mcd |
| Reverse Current | I_R | V _R =5V | - | - | 100 | μΑ |
| Peak Wave Length | λр | I _F =20mA | - | 568 | - | nm |
| Dominant Wave Length | λd | I _F =20mA | 566 | - | 576 | nm |
| Spectral Line Half-width | Δλ | I _F =20mA | ı | 30 | ı | nm |
| Veiwing Angle | 2θ _{1/2} | I _F =20mA | - | 100 | - | deg |


Typical Electro-Optical Characteristics Curves


















BL-HX134A-TRB

Tapping and packaging specifications(Units: mm)

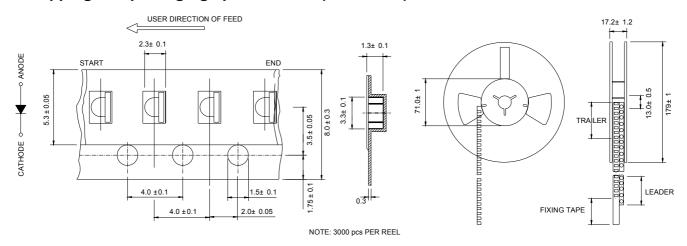

● Package Method:(unit:mm)

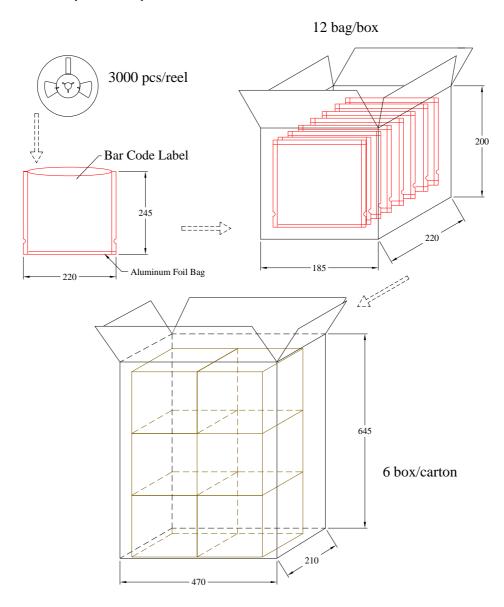



BL-HX134A-TRB

Bin Limits

Intensity Bin Limits (At 20mA)


| BIN CODE | Min. (mcd) | Max. (mcd) | |
|----------|------------|------------|--|
| J | 8.2 | 14.0 | |
| K | 12.3 | 21.0 | |
| L | 18.5 | 32.0 | |
| М | 28.0 | 48.0 | |

Tolerance for each Bin limit is \pm 15 %

Color Bin Limits (At 20mA)

| | , | | |
|----------|-----------|-----------|--|
| BIN CODE | Min. (nm) | Max. (nm) | |
| 4 | 566 | 568 | |
| 5 | 568 | 572 | |
| 6 | 569 | 574 | |
| 7 | 571 | 576 | |

Tolerance for each Bin limit is ± 1

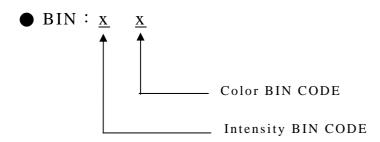



BL-HX134A-TRB

Reliability Test

| Classification | Test Item | Reference Standard | Test Conditions | Result |
|-----------------------|-------------------------------|---|--|--------|
| Endurance | Operation Life | MIL-STD-750:1026 MIL-STD-883:1005 JIS-C-7021 :B-1 | Connect with a power If=20mA Ta=Under room temperature Test time=1,000hrs | 0/20 |
| | · • | MIL-STD-202:103B JIS-C-7021 :B-11 | Ta=+65°C±5°C RH=90%-95% Test time=240hrs | 0/20 |
| Test | High | MIL-STD-883:1008 JIS-C-7021 :B-10 | High Ta=+85°C±5°C Test time=1,000hrs | 0/20 |
| | Low Temperature Storage | JIS-C-7021 :B-12 | Low Ta=-35°C±5°C Test time=1,000hrs | 0/20 |
| | , , | MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1010 JIS-C-7021 :A-4 | -35°C ~ $+25$ °C ~ $+85$ °C ~ $+25$ °C 60min 20min 60min 20min Test Time=5cycle | 0/20 |
| Environmental Test | | MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1011 | -35°C±5°C ~+85°C±5°C 20min 20min Test Time=10cycle | 0/20 |
| | lResistance | MIL-STD-202:201A MIL-STD-750:2031 JIS-C-7021 :A-1 | Preheating: 140°C-160°C, within 2 minutes. Operation heating: 235°C (Max.), within 10seconds. (Max.) | 0/20 |

Judgment criteria of failure for the reliability

| Measuring items | Symbol | Measuring conditions | Judgement criteria for failure |
|--------------------|------------|----------------------|--------------------------------|
| Forward voltage | $V_{F}(V)$ | I _F =20mA | Over Ux1.2 |
| Reverse current | $I_R(uA)$ | V _R =5V | Over Ux2 |
| Luminous intensity | Iv (mcd) | I _F =20mA | Below SX0.5 |

Note: 1.U means the upper limit of specified characteristics. S means initial value.

2.Measurment shall be taken between 2 hours and after the test pieces have been returned to normal ambient conditions after completion of each test.



BL-HX134A-TRB

Soldering :

1. Manual Of Soldering


The temperature of the iron tip should not be higher than 300° C (572°F) and Soldering within 3 seconds per solder-land is to be observed.

2. Reflow Soldering

Preheating: 140°C ~160°C ±5°C, within 2 minutes.

Operation heating: 235°C (Max.) within 10 seconds.(Max)

Gradual Cooling (Avoid quenching).

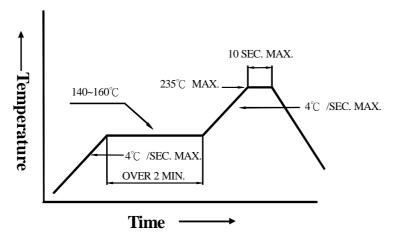


3. DIP soldering (Wave Soldering):

Preheating: 120° C ~ 150° C, within 120° 180 sec.

Operation heating : $245^{\circ}C \pm 5^{\circ}C$ within 5 sec.260°C (Max)

Gradual Cooling (Avoid quenching).

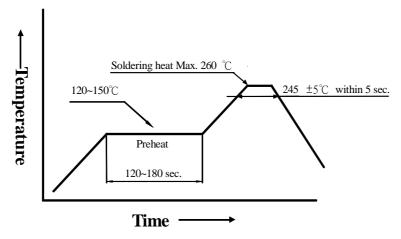

Handling:

Care must be taken not to cause to the epoxy resin portion of BRIGHT LEDs while it is exposed to high temperature.

Care must be taken not rub the epoxy resin portion of BRIGHT LEDs with hard or sharp article such as the sand blast and the metal hook.



BL-HX134A-TRB

Notes for designing:

Care must be taken to provide the current limiting resistor in the circuit so as to drive the BRIGHT LEDs within the rated figures. Also, caution should be taken not to overload BRIGHT LEDs with instantaneous voltage at the turning ON and OFF of the circuit.

When using the pulse drive care must be taken to keep the average current within the rated figures. Also, the circuit should be designed so as be subjected to reverse voltage when turning off the BRIGHT LEDs.

Storage:

In order to avoid the absorption of moisture, it is recommended to solder BRIGHT LEDs as soon as possible after unpacking the sealed envelope.

If the envelope is still packed, to store it in the environment as following:

- (1) Temperature : 5°C-30°C (41°F)Humidity : RH 60% Max.
- (2) After this bag is opened, devices that will be applied to infrared reflow, vapor-phase reflow, or equivalent soldering process must be:
- a. Completed within 24 hours.
- b. Stored at less than 30% RH.
- (3) Devices require baking before mounting, if: (2) a or (2) b is not met.
- (4) If baking is required, devices must be baked under below conditions: 12 hours at $60^{\circ}\text{C} \pm 3^{\circ}\text{C}$.

Package and Label of Products:

- (1) Package: Products are packed in one bag of 3000 pcs (one taping reel) and a label is attached on each bag.
- (2) Label:

