

Technical Data Sheet

Chip LED with Right Angle Lens

48-21/W1D-ANPHY/3C

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.



Descriptions

- The 48-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide


Part No.	C	Lens Color	
Part No.	Material	Emitted Color	Lens Color
48-21/W1D-ANPHY/3C	InGaN	Pure White	Yellow Diffused

Everlight Electronics Co., Ltd. http://www.everlight.com Device No.: DSE-481-W01 Prepared date: 07-26-2005 Prepared by: Jeff Tsai


Rev. 2

Page: 1 of 11

Package Outline Dimensions










0.9

1.2

1.2



Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No.: DSE-481-W01

http://www.everlight.com

Prepared date: 08-08-2004

Rev. 1.0

Page: 2 of 11

Prepared by: Jeff Tsai



EVERLIGHT ELECTRONICS CO.,LTD.

48-21/W1D-ANPHY/3C

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	260 (for 5 seconds)	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge	ESD	150	V
Power Dissipation	Pd	110	mW
Peak Forward Current (Duty 1/10 @1KHz)	IFP	100	mA

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	28.5		72.0	mcd	
Viewing Angle	2 \theta 1/2		140		deg	I _F =5mA
Forward Voltage	VF	2.70		3.15	V	
Reverse Current	Ir			50	μ A	V _R =5V

Bin Range Of Luminous Intensity & Forward Voltage

Symbol	Bin Code	Min.	Max.	Unit	Condition	
Iv	N	28.5	45.0	1		
	P	45.0	72.0	mcd		
VF	15	2.70	2.85		IF=5mA	
	16	2.85	3.00	V		
	17	3.00	3.15			

Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 3 of 11



Chromaticity Coordinates Specifications for Bin Grading


Groups	Bin Code	CIE_x	CIE_y	Condition
	1	0.274	0.226	
		0.274	0.258	
		0.294	0.286	
		0.294 0.254		
		0.274	0.258	
	2	0.274	0.291	
	2	0.294	0.319	
		0.294	0.286	
		0.294	0.254	
	3	0.294	0.286	
		0.314	0.315	
A		0.314	0.282	IF=5mA
A	4	0.294	0.286	Ir–JiliA
		0.294	0.319	
		0.314	0.347	
		0.314	0.315	
	5	0.314	0.282	
		0.314	0.315	
		0.334	0.343	
		0.334	0.311	
	6	0.314	0.315	
		0.314	0.347	
		0.334	0.376	
		0.334	0.343	

Notes:

- 1.The C.I.E. 1931 chromaticity diagram (Tolerance ± 0.01).
- 2. The products are sensitive to static electricity and care must be fully taken when handling products.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 4 of 11

CIE Chromaticity Diagram

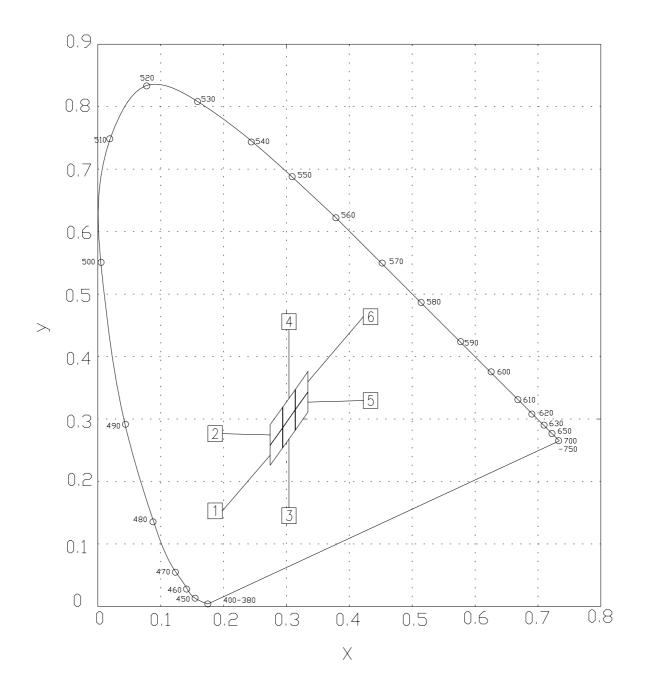

Everlight Electronics Co., Ltd.

Device No.: DSE-481-W01

http://www.everlight.com


Prepared date: 08-08-2004


Rev. 1.0


Page: 5 of 11


Prepared by: Jeff Tsai


Typical Electro-Optical Characteristics Curves

















Everlight Electronics Co., Ltd.

Device No.: DSE-481-W01


http://www.everlight.com

Rev. 1.0 Page: 6 of 11

Prepared date: 08-08-2004 Prepared by: Jeff Tsai


Label explanation

CAT: Luminous Intensity Rank HUE: Chromaticity Coordinates REF: Forward Voltage Rank

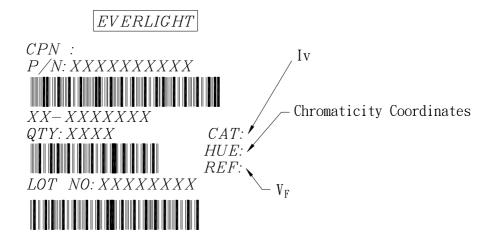

MADE IN TAIWAN


Reel Dimensions

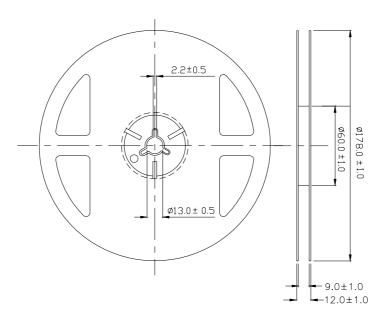

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 7 of 11

Carrier Tape Dimensions: Loaded quantity 3000 pcs per reel

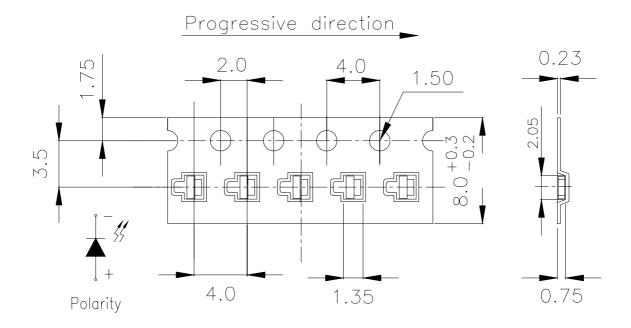

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

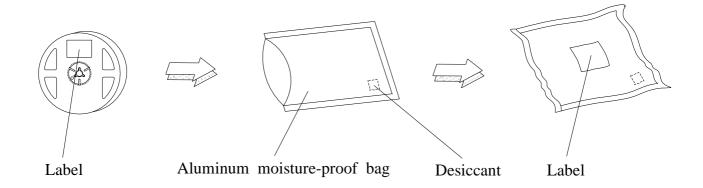

Everlight Electronics Co., Ltd. http://www.everlight.com Device No.: DSE-481-W01 Prepared date: 08-08-2004 Prepared by: Jeff Tsai

Rev. 1.0

Page: 8 of 11



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 9 of 11

EVERLIGHT ELECTRONICS CO.,LTD. 48-21/W1D-ANPHY/3C

Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30° C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

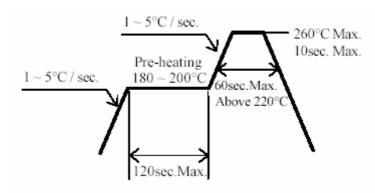

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4. Soldering Iron


Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 10 of 11



5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

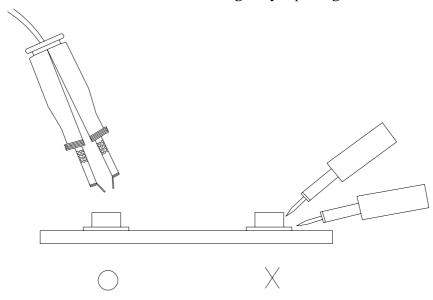

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.0 Page: 11 of 11