SPECIFICATIONS FOR NICHIA CHIP TYPE **GREEN** LED MODEL : **NFSG036BT**

NICHIA CORPORATION

1.SPECIFICATIONS

(1) Absolute Maximum Ratings

 $(Ts=25^{\circ}C)$

) 110501444 114411145				
Item	Symbol	Absolute Maximum Rating	Unit	
Forward Current	IF	180	mA	
Pulse Forward Current	IFP	350	mA	
Allowable Reverse Current	Ir	85	mA	
Power Dissipation	PD	810	mW	
Operating Temperature	Topr	-30 ~ + 85	°C	
Storage Temperature	Tstg	-40 ~ +100	°C	
Dice Temperature	Tj	105	°C	
Soldering Temperature	Tsld	Reflow Soldering: 260°C	for 10sec.	
		Hand Soldering : 350°C	for 3sec.	

IFP Conditions : Pulse Width ≤ 10 msec. and Duty $\leq 1/10$

(2) Initial Electrical/Optical Characteristics

 $(Ts=25^{\circ}C)$

2) Initial Electrical Optical Characteristics						
Item		Symbol	Condition	Тур.	Max.	Unit
Forward Voltage		VF	IF=150[mA]	(4.0)	4.5	V
Luminous Flux		φv	I _F =150[mA]	(12.1)	-	lm
Luminous Intensity		Iv	I _F =150[mA]	(4.5)	-	cd
* * * * * * * * * * * * * * * * * * *	X	-	I _F =150[mA]	0.20	-	-
Chromaticity Coordinate	У	_	IF=150[mA]	0.69	-	-

^{*} Please refer to CIE 1931 chromaticity diagram.

(3) Ranking

 $(Ts=25^{\circ}C)$

Item		Symbol	Condition	Min.	Max.	Unit
	Rank P7			15.1	18.0	
	Rank P6			12.7	15.1	
Luminous Flux	Rank P5	φv	IF=150[mA]	10.7	12.7	lm
	Rank P4			9.0	10.7	
	Rank P3			7.6	9.0	

^{*} Luminous Flux Measurement allowance is \pm 7%.

Color Rank

 $(I_F=150mA, T_S=25^{\circ}C)$

	Rank G0d						
X	0.190	0.136	0.176	0.220	0.250	0.219	
У	0.628	0.739	0.750	0.745	0.638	0.637	

^{*} Color Coordinates Measurement allowance is ± 0.01 .

* One delivery will include up to one color rank and five luminous flux ranks of the products. The quantity-ratio of the ranks is decided by Nichia.

(4) Correspondence table of Luminous Flux – Luminous Intensity (Reference)

φν (lm)	Iv (cd)
18.0	(6.8)
15.1	(5.7)
12.7	(4.7)
10.7	(3.9)
9.0	(3.3)
7.6	(2.7)

2.INITIAL OPTICAL/ELECTRICAL CHARACTERISTICS

Please refer to figure's page.

3.OUTLINE DIMENSIONS AND MATERIALS

Please refer to figure's page.

Material as follows; Package : Ceramics

Encapsulating Resin : Silicone Resin (with Diffused)

Encapsulating Resin Color : Green (with Diffused)

Electrodes : Ag Plating

4.PACKAGING

· The LEDs are packed in cardboard boxes after taping.

Please refer to figure's page.

The label on the minimum packing unit shows; Part Number, Lot Number, Ranking, Quantity

- · In order to protect the LEDs from mechanical shock, we pack them in cardboard boxes for transportation.
- The LEDs may be damaged if the boxes are dropped or receive a strong impact against them, so precautions must be taken to prevent any damage.
- · The boxes are not water resistant and therefore must be kept away from water and moisture.
- · When the LEDs are transported, we recommend that you use the same packing method as Nichia.

5.LOT NUMBER

The first six digits number shows **lot number**.

The lot number is composed of the following characters;

 \bigcirc \square \times \times \times \times - \triangle

O - Year (4 for 2004, 5 for 2005)

□ - Month (1 for Jan., 9 for Sep., A for Oct., B for Nov.)

×××× - Nichia's Product Number

 \triangle - Ranking by Color Coordinates

Ranking by Luminous Flux

6.RELIABILITY

(1) TEST ITEMS AND RESULTS

	Standard			Number o
Test Item	Test Method	Test Conditions	Note	Damaged
Resistance to	JEITA ED-4701	Tsld=260°C, 10sec.	2 times	0/50
Soldering Heat	300 301	(Pre treatment 30°C,70%,168hrs.)		
(Reflow Soldering)				
Solderability	JEITA ED-4701	Tsld= 215 ± 5 °C, 3sec.	1 time	0/50
(Reflow Soldering)	300 303	(Lead Solder)	over 95%	
Thermal Shock	JEITA ED-4701	0°C ~ 100°C	20 cycles	0/50
	300 307	15sec. 15sec.		
Temperature Cycle	JEITA ED-4701	-40°C ~ 25°C ~ 100°C ~ 25°C	100 cycles	0/50
	100 105	30min. 5min. 30min. 5min.		
High Temperature Storage	JEITA ED-4701	Ta=100°C	500 hrs.	0/50
	200 201			
Temperature Humidity	JEITA ED-4701	Ta=60°C, RH=90%	500 hrs.	0/50
Storage	100 103			
Low Temperature Storage	JEITA ED-4701	Ta=-40°C	500 hrs.	0/50
	200 202			
Steady State Operating Life		Ta=25°C, IF=150mA	500 hrs.	0/50
		Tested with Nichia standard circuit board.*		
Steady State Operating Life		Ta=70°C, IF=100mA	500 hrs.	0/50
of High Temperature		Tested with Nichia standard circuit board.*		
Steady State Operating Life		60°C, RH=90%, IF=100mA	500 hrs.	0/50
of High Humidity Heat		Tested with Nichia standard circuit board.*		
Steady State Operating Life		Ta=-40°C, IF=150mA	500 hrs.	0/50
of Low Temperature		Tested with Nichia standard circuit board.*		
Vibration	JEITA ED-4701	100 ~ 2000 ~ 100Hz Sweep 4min.	48min.	0/50
	400 403	$200 \mathrm{m/s}^2$		
		3direction, 4cycles		
Substrate Bending	JEITA ED-4702	3mm, 5 ± 1 sec.	1 time	0/50
Adhesion Strength	JEITA ED-4702	5N, 10 ± 1 sec.	1 time	0/50
Electrostatic Discharges	JEITA ED-4701	R=1.5kΩ, C=100pF	3 times	0/50
	300 304	Test Voltage=2kV	Negative/Positive	

^{*} Thermal resistance of LED with Nichia standard circuit board : Rja ≒ 140°C/W Nichia standard circuit board : FR4, t=1.6mm, Copper foil, t=0.07mm

(2) CRITERIA FOR JUDGING DAMAGE

			Criteria for Judgement	
Item	Symbol	Test Conditions	Min.	Max.
Forward Voltage	VF	I _F =150mA	-	Initial Level \times 1.1
Luminous Flux	φv	I _F =150mA	Initial Level \times 0.7	-

^{*} The test is performed after the board is cooled down to the room temperature.

7.CAUTIONS

(1) Moisture Proof Package

- · When moisture is absorbed into the SMT package it may vaporize and expand during soldering. There is a possibility that this can cause exfoliation of the contacts and damage the optical characteristics of the LEDs. For this reason, the moisture proof package is used to keep moisture to a minimum in the package.
- The moisture proof package is made of an aluminum moisture proof bag. A package of a moisture absorbent material (silica gel) is inserted into the aluminium moisture proof bag. The silica gel changes its color from blue to pink as it absorbs moisture.

(2) Storage

· Storage Conditions

Before opening the package:

The LEDs should be kept at 30°C or less and 90%RH or less. The LEDs should be used within a year. When storing the LEDs, moisture proof packaging with absorbent material (silica gel) is recommended.

After opening the package:

The LEDs should be kept at 30°C or less and 70%RH or less. The LEDs should be soldered within 168 hours (7days) after opening the package. If unused LEDs remain, they should be stored in the moisture proof packages, such as sealed containers with packages of moisture absorbent material (silica gel). It is also recommended to return the LEDs to the original moisture proof bag and to reseal the moisture proof bag again.

· If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following condition.

Baking treatment : more than 24 hours at $65 \pm 5^{\circ}$ C

- This product has silver plated metal parts that are inside and/or outside the package body. The silver plating becomes tarnished when being exposed to an environment which contains corrosive gases. Any LED with tarnished leads may lead to poor solderability and deterioration of optical characteristics. Please do not expose the LEDs to corrosive atmosphere during storage.
- · After assembly and during use, silver plating can be affected by the corrosive gases emitted by components and materials in close proximity of the LEDs within an end product, and the gases entering into the product from the external atmosphere. The above should be taken into consideration when designing.
- · Please avoid rapid transitions in ambient temperature, especially in high humidity environments where condensation can occur.

(3) Static Electricity

· Static electricity or surge voltage damages the LEDs.


It is recommended that a wrist band or an anti-electrostatic glove be used when handling the LEDs.

- · All devices, equipment and machinery must be properly grounded. It is recommended that precautions be taken against surge voltage to the equipment that mounts the LEDs.
- · When inspecting the final products in which LEDs were assembled, it is recommended to check whether the assembled LEDs are damaged by static electricity or not. It is easy to find static-damaged LEDs by a light-on test or a VF test at a lower current (below 1mA is recommended).
- · Damaged LEDs will show some unusual characteristics such as the forward voltage becomes lower, or the LEDs do not light at the low current.

Criteria: (VF > 2.0V at IF=0.5mA)


- (4) Designing the position of LED on a board.
- · No twist / warp / bent / or other stress shall be applied to the board after mounting LED with solder to avoid a crack of LED package.

Refer to the following recommended position and direction of LED.

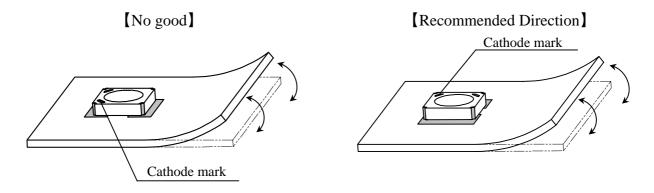

Appropriate LED mounting is to place perpendicularly against the stress affected side.

· Depending on the position and direction of LED, the mechanical stress on the LED package can be changed. Refer to the following figure.

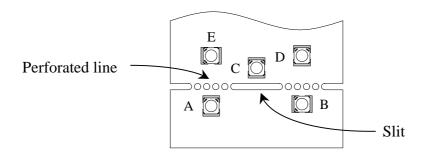

Stress: A > B = C > D > E

- · Do not split board by hand. Split with exclusive special tool.
- · If an aluminum circuit board is used, a large stress by thermal shock might cause a solder crack. For this reason, it is recommended an appropriate verification should be taken before use.

(5) Soldering Conditions

• The LEDs can be soldered in place using the reflow soldering method. Nichia cannot make a guarantee on the LEDs after they have been assembled using the dip soldering method.

· Recommended soldering conditions


	Reflow Solderin	Hand S	oldering	
	Lead Solder	Lead-free Solder		
Pre-heat	120 ~ 150°C	180 ~ 200°C	Temperature	350°C Max.
Pre-heat time	120 sec. Max.	120 sec. Max.	Soldering time	3 sec. Max.
Peak temperature	240°C Max.	260°C Max.		(one time only)
Soldering time	10 sec. Max.	10 sec. Max.		
Condition	refer to	refer to		
	Temperature - profile ①.	Temperature - profile ②.		
		(N_2 reflow is recommended.)		

- * Although the recommended soldering conditions are specified in the above table, reflow or hand soldering at the lowest possible temperature is desirable for the LEDs.
- * A rapid-rate process is not recommended for cooling the LEDs down from the peak temperature. [Temperature-profile (Surface of circuit board)] Use the conditions shown to the under figure.

Pre-heating 1 ~ 5°C / sec.
1 ~ 5°C / sec.
Pre-heating 180 ~ 200°C 60sec.Max. Above 220°C
120sec.Max.

[Recommended soldering pad design]

Use the following conditions shown in the figure.



- · Occasionally there is a brightness decrease caused by the influence of heat or ambient atmosphere during air reflow. It is recommended that the User use the nitrogen reflow method.
- The encapsulated material of the LEDs is silicone. Therefore the LEDs have a soft surface on the top of package. The pressure to the top surface will be influence to the reliability of the LEDs. Precautions should be taken to avoid the strong pressure on the encapsulated part. So when using the chip mounter, the picking up nozzle that does not affect the silicone resin should be used.
- · Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.
- · Reflow soldering should not be done more than two times.
- · When soldering, do not put stress on the LEDs during heating.

(6) Cleaning

- It is recommended that isopropyl alcohol be used as a solvent for cleaning the LEDs. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not. Freon solvents should not be used to clean the LEDs because of worldwide regulations.
- Do not clean the LEDs by the ultrasonic. When it is absolutely necessary, the influence of ultrasonic cleaning on the LEDs depends on factors such as ultrasonic power and the assembled condition. Before cleaning, a pre-test should be done to confirm whether any damage to the LEDs will occur.


(7) Heat Generation

- Thermal design of the end product is of paramount importance. Please consider the heat generation of the LED when making the system design. The coefficient of temperature increase per input electric power is affected by the thermal resistance of the circuit board and density of LED placement on the board, as well as other components. It is necessary to avoid intense heat generation and operate within the maximum ratings given in this specification.
- · Please determine the operating current with consideration of the ambient temperature local to the LED and refer to the plot of Ambient temperature vs. Allowable Forward Current on CHARACTERISTICS in this specifications. Please also take measures to remove heat from the area near the LED to improve the operational characteristics of the LED.
- The equation ① indicates correlation between Tj and Ta, and the equation ② indicates correlation between Tj and Ts.

```
\begin{split} &Tj = Ta + Rja \cdot W \quad \text{``````````` } \\ &\bigstar Tj = \text{Dice Temperature} : \ ^{\circ}\text{C}, \quad Ta = \text{Ambient Temperature} : \ ^{\circ}\text{C}, \\ &Ts = \text{Solder Temperature} \text{ (Cathode Side)} : \ ^{\circ}\text{C}, \\ &Rja = \text{Heat resistance from Dice to Ambient temperature} : \ ^{\circ}\text{C} / W, \\ &Rjs = \text{Heat resistance from Dice to Ts measuring point} \ \ \stackrel{:}{\rightleftharpoons} \ \ 85 \, ^{\circ}\text{C} / W, \\ &W = \text{Inputting Power} \text{ (If } \times \text{VF)} : W \end{split}
```


(8) Others

- · NFSG036B complies with RoHS Directive.
- The LED light output is strong enough to injure human eyes. Precautions must be taken to prevent looking directly at the LEDs with unaided eyes for more than a few seconds.
- · Flashing lights have been known to cause discomfort in people; you can prevent this by taking precautions during use. Also, people should be cautious when using equipment that has had LEDs incorporated into it.
- The LEDs described in this brochure are intended to be used for ordinary electronic equipment (such as office equipment, communications equipment, measurement instruments and household appliances). Consult Nichia's sales staff in advance for information on the applications in which exceptional quality and reliability are required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as for airplanes, aerospace, submersible repeaters, nuclear reactor control systems, automobiles, traffic control equipment, life support systems and safety devices).
- · User shall not reverse engineer by disassembling or analysis of the LEDs without having prior written consent from Nichia. When defective LEDs are found, the User shall inform Nichia directly before disassembling or analysis.
- The formal specifications must be exchanged and signed by both parties before large volume purchase begins.
- The appearance and specifications of the product may be modified for improvement without notice.

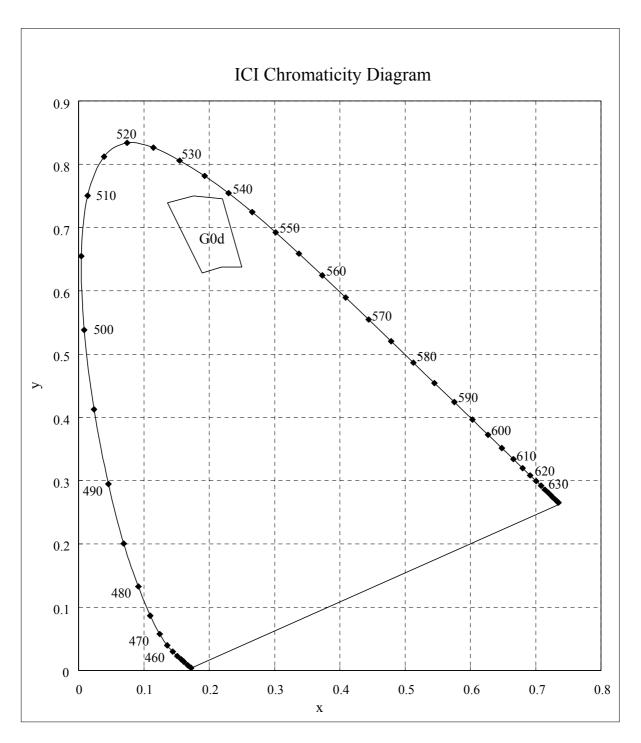


* Color Coordinates Measurement allowance is ± 0.01 .


■ Forward Voltage vs. Forward Current




■ Ambient Temperature vs. Forward Voltage




■ Forward Current vs. Relative Luminous Flux




■ Ambient Temperature vs. Relative Luminous Flux



Duty Ratio vs.Allowable Forward Current




■ Ambient Temperature vs. Allowable Forward Current



NICHIA CORPORATION


	Model	NFSG036B	\setminus
J	Title	CHARACTERISTICS	
	No.	051014546171	

■ Forward Current vs. Chromaticity Coordinate (λD)




■ Forward Current vs.


Dominant Wavelength




■ Spectrum



■ Ambient Temperature vs. Dominant Wavelength




■ Directivity

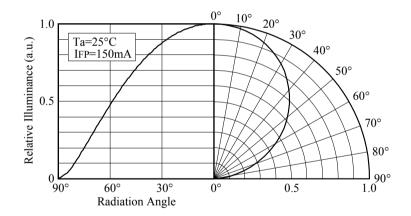

	Model	NFSG036B	
N	Title	CHARACTERISTICS	
	No.	051014546181	


Nichia STSE-CC5149A <Cat.No.051025>

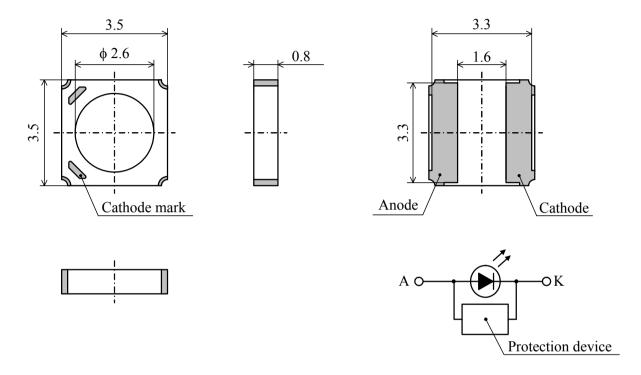

ITEM	MATERIALS
PACKAGE	Ceramics
ENCAPSULATING RESIN	Silicone Resin (with Diffused)
ENCAPSULATING RESIN COLOR	Green (with Diffused)
ELECTRODES	Ag Plating

* NFSG036x has a protection device built in as a protection circuit against static electricity.


NICHIA CORPORATION	Model	NFSG036x	Unit
	Title	OUTLINE DIMENSIONS	8/1 Scale
	No.	051014538652	Allow ±0.2

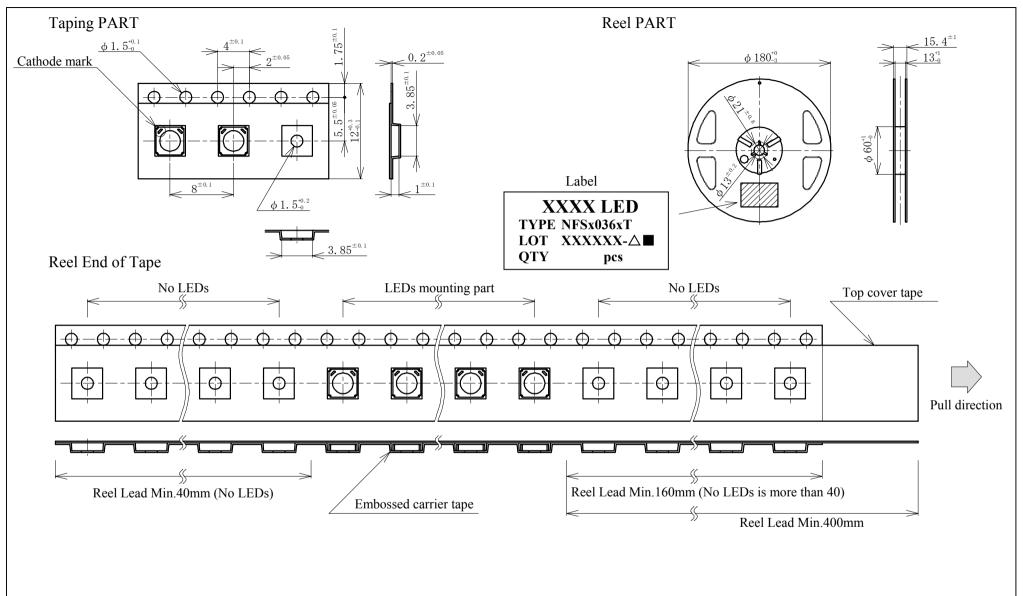

Taping is based on the JIS C 0806: Packaging of Electronic Components on Continuous Tapes.

	Model	NFSx036xT	Unit Cat S
	Title	TAPING DIMENSIONS	No.0510 Scale
	No.	050620537332	Allow 25>
	•		 · ·

The reel and moisture absorbent material are put in the moisture proof foil bag and then heat sealed.

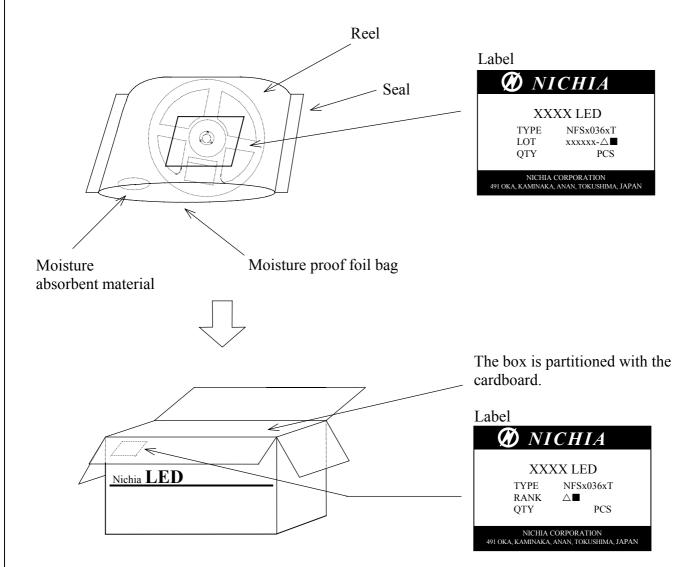

Packing unit

	Reel/bag	Quantity/bag (pcs)
Moisture proof foil bag	1reel	2,000 MAX.

Cardboard box	Dimensions (mm)	Reel/box	Quantity/box (pcs)
Cardboard box S	291×237×120×8t	5reel MAX.	10,000 MAX.
Cardboard box M	259×247×243×5t	10reel MAX.	20,000 MAX.
Cardboard box L	444×262×259×8t	20reel MAX.	40,000 MAX.

	Model	NFSx036xT	
NICHIA CORPORATION	Title	PACKING	
	No.	050616541931	