


74LCX541

Low voltage CMOS octal bus buffer (3-state) with 5V tolerant inputs and outputs

Features

- 5V tolerant inputs and outputs
- High speed:
 - t_{PD} = 8.0ns (Max) at V_{CC} = 3V
- Power down protection on inputs and outputs
- Symmetrical output impedance:
 - $II_{OH}I = I_{OL} = 24mA$ (Min) at $V_{CC} = 3V$
- PCI bus levels guaranteed at 24mA
- Balanced propagation delays:
 - $t_{PLH} \cong t_{PHL}$
- Operating voltage range:
 - V_{CC} (Opr) = 2.0V to 3.6V
- Pin and function compatible with 74 series 541
- Latch-up performance exceeds 500mA (JESD 17)
- ESD performance:
 - HBM > 2000V (MIL STD 883 method 3015); MM > 200V



Description

The 74LCX541 is a low voltage CMOS octal bus buffer (non-inverted) fabricated with sub-micron silicon gate and double-layer metal wiring C²MOS technology. It is ideal for low power and high speed 3.3V applications; it can be interfaced to 5V signal environment for both inputs and outputs.

The 3 STATE control gate operates as two input AND such that if either G1 and G2 are high, all eight outputs are in the high impedance state. In order to enhance PC board layout the 74LCX541 offers a pinout having inputs and outputs on opposite sides of the package.

It has same speed performance at 3.3V than 5V AC/ACT family, combined with a lower power consumption.

All inputs and outputs are equipped with protection circuits against static discharge, giving them 2KV ESD immunity and transient excess voltage.

Order codes

Part number	Package	Packaging
74LCX541MTR	SO-20	Tape and reel
74LCX541TTR	TSSOP20	Tape and reel

Contents 74LCX541

Contents

1	Logic symbols and I/O equivalent circuit	3
2	Pin settings	4
	2.1 Pin connection	4
	2.2 Pin description	4
3	Logic states	5
	3.1 Truth table	5
4	Maximum rating	6
	4.1 Recommended operating conditions	6
5	Electrical characteristics	7
6	Test circuit	9
7	Waveforms	0
8	Package mechanical data	1
9	Revision history	6

1 Logic symbols and I/O equivalent circuit

Figure 1. IEC logic symbols


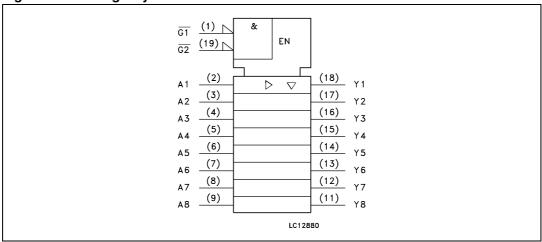


Figure 2. Input and output equivalent circuit

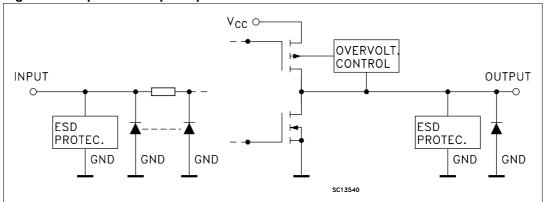


577

Pin settings 74LCX541

2 Pin settings

2.1 Pin connection

Figure 3. Pin connection (top through view)

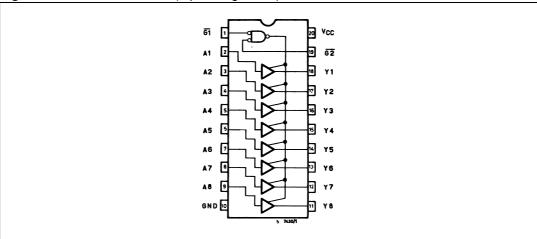

2.2 Pin description

Table 1. Pin description

Pin N°	Symbol	Name and function
1, 19	<u>G1</u> , <u>G2</u>	Output enable inputs
2, 3, 4, 5, 6, 7, 8, 9	A1 to A8	Data inputs
18, 17, 16, 15, 14, 13, 12, 11	<u>∀1</u> to <u>∀8</u>	Data outputs
10	GND	Ground (0V)
20	V _{CC}	Positive supply voltage

74LCX541 Logic states

3 Logic states

3.1 Truth table

Table 2. Truth table

	Input	Output	
G1	G2	An	Yn
Н	Х	Х	Z
Х	Н	Х	Z
L	L	Н	L
L	L	L	Н

Note: X : Do not care

Z: High impedance

Maximum rating 74LCX541

4 Maximum rating

Stressing the device above the rating listed in the "absolute maximum ratings" table may cause permanent damage to the device. these are stress ratings only and operation of the device at these or any other conditions above those indicated in the operating sections of this specification is not implied. exposure to absolute maximum rating conditions for extended periods may affect device reliability. refer also to the STMicroelectronics sure program and other relevant quality documents.

Table 3. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V _{CC}	Supply voltage	-0.5 to +7.0	V
VI	DC input voltage	-0.5 to +7.0	٧
Vo	DC output voltage (OFF state)	-0.5 to +7.0	٧
Vo	DC output voltage (high or low state) (1)	-0.5 to V _{CC} + 0.5	٧
I _{IK}	DC input diode current	-50	mA
I _{OK}	DC output diode current (2)	-50	mA
Io	DC output current	±50	mA
I _{CC}	DC supply current per supply pin	± 100	mA
I _{GND}	DC ground current per supply pin	± 100	mA
T _{stg}	Storage temperature	-65 to +150	°C
T _L	Lead temperature (10 sec)	300	°C

^{1.} I_O absolute maximum rating must be observed

4.1 Recommended operating conditions

Table 4. Recommended operating conditions

Symsbol	Parameter	Value	Unit
V _{CC}	Supply voltage ⁽¹⁾	2.0 to 3.6	٧
V _I	Input voltage	0 to 5.5	٧
V _O	Output voltage (OFF state)	0 to 5.5	٧
V _O	Output voltage (high or low state)	0 to V _{CC}	٧
I _{OH} , I _{OL}	High or low level output current (V _{CC} = 3.0 to 3.6V)	± 24	mA
I _{OH} , I _{OL}	High or low level output current (V _{CC} = 2.7V)	± 12	mA
T _{op}	Operating temperature	-40 to 85	°C
dt/dv	Input rise and fall time (2)	0 to 10	ns/V

^{1.} Truth table guaranteed: 1.5V to 3.6V

^{2.} $V_O < GND$

^{2.} V_{IN} from 0.8V to 2V at V_{CC} = 3.0V

5 Electrical characteristics

Table 5. DC specifications

	-	Test condition		Val	ue	
Symbol	Parameter	v _{cc}		-40 to	85°C	Unit
		(V)		Min	Max	
V_{IH}	High level input voltage	2.7 to 3.6		2.0		V
V _{IL}	Low level input voltage	2.7 10 3.0			0.8	V
		2.7 to 3.6	$I_{O} = -100 \mu A$	V _{CC} -0.2		
V.	I limb laval avdavd valdana	2.7	I _O = -12mA	2.2		.,
V _{OH}	High level output voltage	0.0	I _O = -18mA	2.4		V
		3.0	I _O = -24mA	2.2		
	Low level output voltage	2.7 to 3.6	I _O = 100μA		0.2	
M		2.7	I _O = 12mA		0.4	.,
V _{OL}		3.0	I _O = 16mA		0.4	V
			3.0	I _O = 24mA		0.55
I _I	Input leakage current	2.7 to 3.6	V _I = 0 to 5.5V		± 5	μΑ
I _{off}	Power OFF leakage current	0	V_I or $V_O = 5.5V$		10	μА
I _{OZ}	High impedance output leakage current	2.7 to 3.6	$V_I = V_{IH} \text{ or } V_{IL}$ $V_O = 0 \text{ to } V_{CC}$		± 5	μА
,	Quiescent supply current 2.7 to	0.71.00	$V_I = V_{CC}$ or GND		10	
I _{CC}		2.7 to 3.6	3.6 V_1 or $V_0 = 3.6$ to 5.5V		± 10	μΑ
Δl _{CC}	I incr. per Input	2.7 to 3.6	V _{IH} = V _{CC} - 0.6V		500	μА

Table 6. Dynamic switching characteristics

		Te	Value				
Symbol	Parameter	V _{CC}		Т,	₄ = 25 °	C	Unit
		(V)		Min	Тур	Max	
V _{OLP}	Dynamic low level quiet	3.3	$C_L = 50pF$ $V_{IL} = 0V, V_{IH} = 3.3V$		0.8		V
V _{OLV}	output ⁽¹⁾	3.3	$V_{IL} = 0V$, $V_{IH} = 3.3V$		-0.8]

^{1.} Number of outputs defined as "n". Measured with "n-1" outputs switching from HIGH to LOW or LOW to HIGH. The remaining output is measured in the LOW state.

47/

Electrical characteristics 74LCX541

Table 7. AC electrical characteristics

			Test cor	ndition		Va		
Symbol	Parameter	V _{cc}	C _L	R_{L}	t _s = t _r	-40 to 85 °C		Unit
		(V)	(pF)	(Ω)	(ns)	Min	Max	
t _{PLH} t _{PHL}	Propagation delay	2.7	50	500	2.5	1.5	9.0	ns
	time	3.0 to 3.6				1.5	8.0	
t _{PZL} t _{PZH}	Output enable	2.7	50	500	2.5	1.5	9.5	ns
	time	3.0 to 3.6				1.5	8.5	
t _{PLZ} t _{PHZ}	Output disable	2.7	50	500	2.5	1.5	8.5	ns
	time	3.0 to 3.6				1.5	7.5	
t _{OSLH} t _{OSHL}	output to output skew time (1) (2)	3.0 to 3.6	50	500	2.5		1.0	ns

Skew is defined as the absolute value of the difference between the actual propagation delay for any two
outputs of the same device switching in the same direction, either HIGH or LOW (t_{OSLH} = I t_{PLHm} - t_{PLHn}I,
t_{OSHL} = I t_{PHLm} - t_{PHLn}I)

Table 8. Capacitive characteristics

		Tes	Value				
Symbol	Parameter	V _{CC}		V _{CC} T _A = 25 °C		С	Unit
		(V)		Min	Тур	Max	
C _{IN}	Input capacitance	3.3	$V_{IN} = 0$ to V_{CC}		6		pF
C _{OUT}	Output capacitance	3.3	$V_{IN} = 0$ to V_{CC}		12		pF
C _{PD}	Power dissipation capacitance (1)	3.3	$f_{IN} = 10MHz$ $V_{IN} = 0 \text{ or } V_{CC}$		25		pF

C_{PD} is defined as the value of the IC's internal equivalent capacitance which is calculated from the
operating current consumption without load. (Refer to Test Circuit). Average operating current can be
obtained by the following equation. I_{CC(opr)} = C_{PD} x V_{CC} x f_{IN} + I_{CC}/8 (per buffer)

^{2.} Parameter guaranteed by design

74LCX541 Test circuit

6 Test circuit

Figure 4. Test circuit

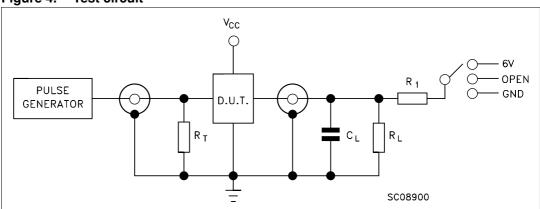


Figure 5. Test circuit

Test	Switch
t _{PLH} , t _{PHL}	Open
t _{PZL} , t _{PLZ}	6V
t _{PZH} , t _{PHZ}	GND

 $C_L = 50 pF$ or equivalent (includes jig and probe capacitance)

 $R_L = R_1 = 500\Omega$ or equivalent

 $R_T = Z_{OUT}$ of pulse generator (typically 50Ω)

Waveforms 74LCX541

7 Waveforms

Figure 6. Propagation delays (f = 1MHz; 50% duty cycle)


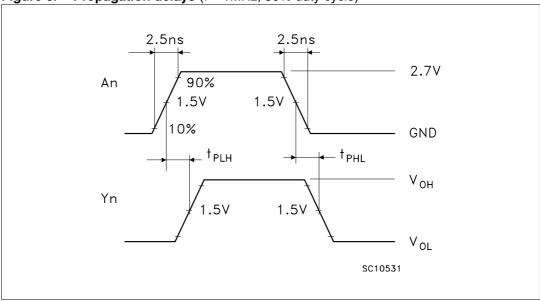


Figure 7. Output enable and disable time (f = 1MHz; 50% duty cycle)

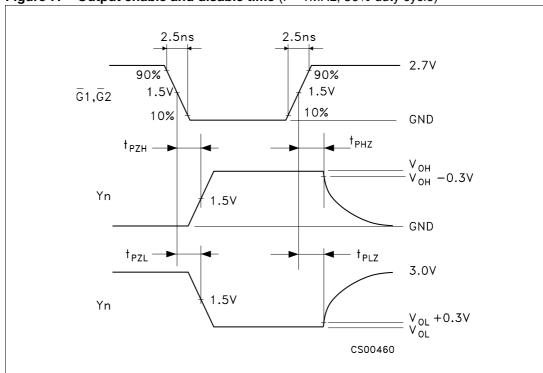


8 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect . The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com

11/17


SO-20 MECHANICAL DATA

DIM.	mm.			inch			
DIM.	MIN.	TYP	MAX.	MIN.	TYP.	MAX.	
Α	2.35		2.65	0.093		0.104	
A1	0.1		0.30	0.004		0.012	
В	0.33		0.51	0.013		0.020	
С	0.23		0.32	0.009		0.013	
D	12.60		13.00	0.496		0.512	
E	7.4		7.6	0.291		0.299	
е		1.27			0.050		
Н	10.00		10.65	0.394		0.419	
h	0.25		0.75	0.010		0.030	
L	0.4		1.27	0.016		0.050	
k	0°		8°	0°		8°	
ddd			0.100			0.004	

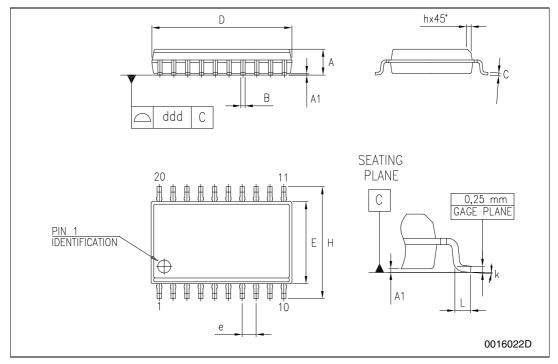


TSSOP20 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
Α			1.2			0.047
A1	0.05		0.15	0.002	0.004	0.006
A2	0.8	1	1.05	0.031	0.039	0.041
b	0.19		0.30	0.007		0.012
С	0.09		0.20	0.004		0.0079
D	6.4	6.5	6.6	0.252	0.256	0.260
E	6.2	6.4	6.6	0.244	0.252	0.260
E1	4.3	4.4	4.48	0.169	0.173	0.176
е		0.65 BSC			0.0256 BSC	
К	0°	_	8°	0°	_	8°
L	0.45	0.60	0.75	0.018	0.024	0.030

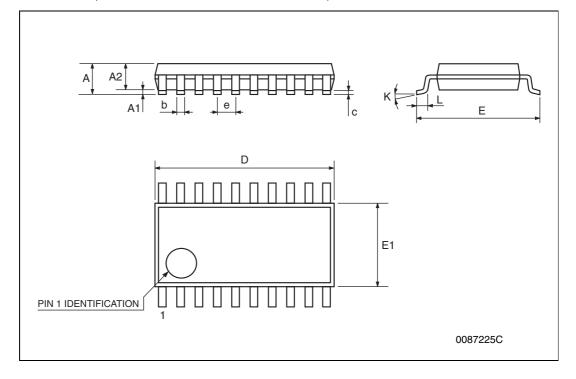


577

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
А			330			12.992
С	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
Т			30.4			1.197
Ao	10.8		11	0.425		0.433
Во	13.2		13.4	0.520		0.528
Ko	3.1		3.3	0.122		0.130
Po	3.9		4.1	0.153		0.161
Р	11.9		12.1	0.468		0.476

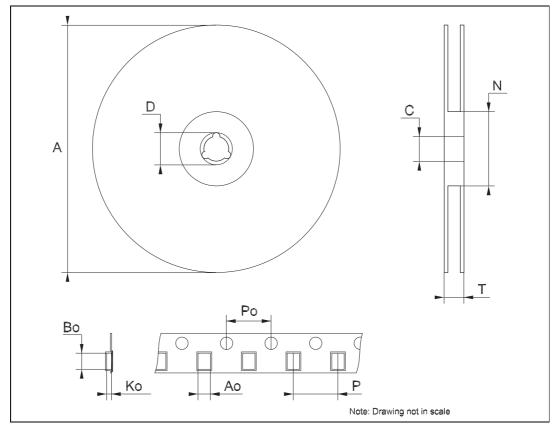

Tape & Reel TSSOP20 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
Α			330			12.992
С	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
Т			22.4			0.882
Ao	6.8		7	0.268		0.276
Во	6.9		7.1	0.272		0.280
Ko	1.7		1.9	0.067		0.075
Po	3.9		4.1	0.153		0.161
Р	11.9		12.1	0.468		0.476

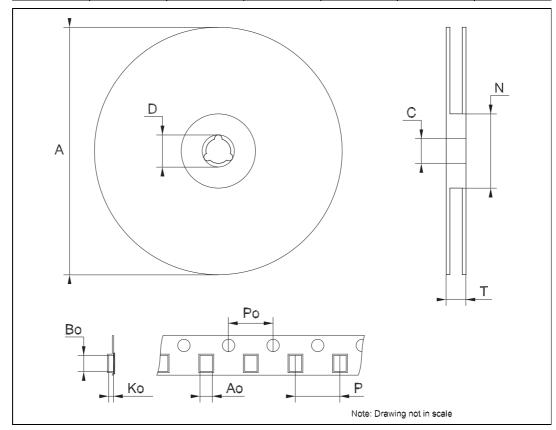

47/

Revision history 74LCX541

9 Revision history

Table 9. Revision history

Date	Revision	Changes	
15-Sep-2004	4	Ordering Codes Revision - pag. 1.	
24-Jan-2007	5	The document has been reformatted, temperature ranges updated	

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

