






## Surface Mount Schottky Barrier Diode

### KAS40,-04,-05,-06 (BAS40,-04,-05,-06)

#### ■ Features

- Low Forward Voltage Drop
- Fast Switching
- PN Junction Guard Ring for Transient and ESD Protection

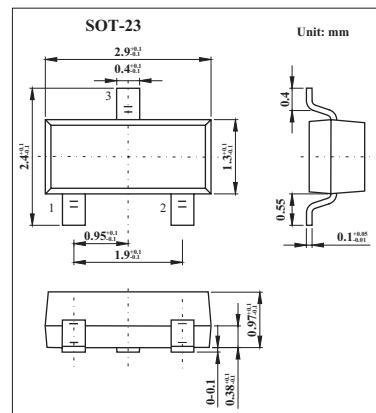

#### ■ Absolute Maximum Ratings Ta = 25°C

| Parameter                                   | Symbol           | Rating      | Unit |
|---|------------------|-------------|------|
| Peak Repetitive Reverse Voltage             | V <sub>RMM</sub> |             |      |
| Working Peak Reverse Voltage                | V <sub>RWM</sub> | 40          | V    |
| DC Blocking Voltage                         | V <sub>R</sub>   |             |      |
| Forward Continuous Current                  | I <sub>FM</sub>  | 200         | mA   |
| Power Dissipation                           | P <sub>d</sub>   | 350         | mW   |
| Forward Surge Current @ t < 1.0s            | I <sub>FSM</sub> | 600         | mA   |
| Thermal Resistance, Junction to Ambient Air | R <sub>θJA</sub> | 357         | °C/W |
| Operating Temperature Range                 | T <sub>j</sub>   | -55 to +125 | °C   |
| Storage Temperature Range                   | T <sub>STG</sub> | -65 to +150 | °C   |

#### ■ Electrical Characteristics Ta = 25°C

| Parameter                 | Symbol            | Testconditons   | Min | Typ | Max         | Unit |
|---------------------------|-------------------|---|-----|-----|-------------|------|
| Reverse Breakdown Voltage | V <sub>(BR)</sub> | I <sub>R</sub> =10 μ A  | 40  |     |             | V    |
| Forward Voltage           | V <sub>F</sub>    | I <sub>F</sub> =1.0mA, t <sub>p</sub> <300 μ s<br>I <sub>F</sub> =40mA, t <sub>p</sub> <300 μ s |     |     | 380<br>1000 | mV   |
| Reverse Leakage           | I <sub>R</sub>    | V <sub>R</sub> =30V, t <sub>p</sub> <300 μ s  | 20  | 200 | nA          |      |
| Junction Capacitance      | C <sub>j</sub>    | V <sub>R</sub> =0V, f=1.0MHz  | 4.0 | 5.0 | pF          |      |
| Reverse Recover Time      | T <sub>rr</sub>   | I <sub>F</sub> = I <sub>R</sub> = 10mA to I <sub>R</sub> = 1.0mA, R <sub>L</sub> = 100 Ω        |     |     | 5.0         | ns   |

#### ■ Marking

| NO.     | KAS40 | KAS40-04 | KAS40-05 | KAS40-06 |
|---------|-------|----------|----------|----------|
| Marking | K43   | K44      | K45      | K46      |